

# CYPRESS 1T XXL LED

Architectural Indoor



PROJECT:	
TYPE:	
PO#:	QTY:
COMMENTS:	





## FEATURES

- 0-10V Dimmable
- Low Profile Seamless Aluminum Frame
- Acrylic Lens
- LED Light Fixture
- Rectangular Driver Box Hanging System (Standard)
- UL Listed Dry Location For Ceiling Mount
- Direct Down Light
- Suspended LED Rectangle Height: 2.75"
- Suspended LED Rectangle Thickness: 0.49"

## LINE DRAWING

LINE DRAWING NOT TO SCALE

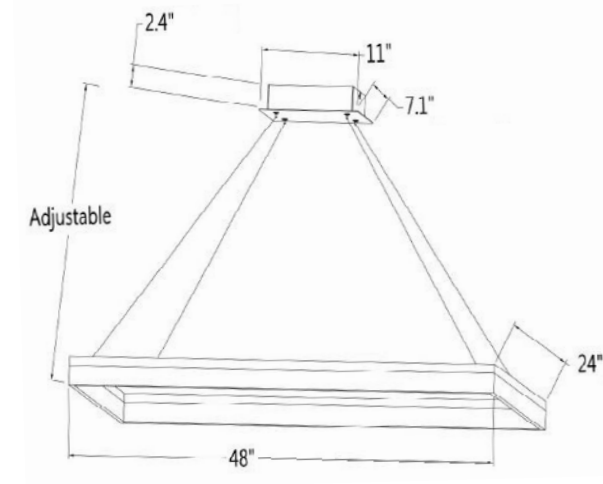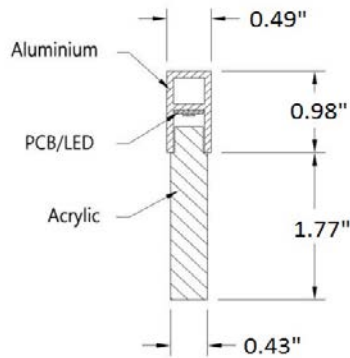


## FINISHES

Matte Black

Matte White

Platinum



# CYPRESS 1T XXL LED

Architectural Indoor



Fixture Core

PROJECT:	
TYPE:	
PO#:	QTY:
COMMENTS:	

PRODUCT CODE	SOURCE/WATTAGE	VOLTAGE	DIMMING DRIVER
<b>CYR1T-XXL</b> - Cypress 1 Tier 48" x 24"	<b>L60.0-ZE1430mA</b> - 60.0W @ 1430mA Dimming Driver	<b>120V - 277V</b>	<b>ZE - 0-10V Dimming</b>
ORDER INFO			
CYR1T-XXL Example ^	L60.0-ZE1430	120-277V	Not Applicable

Aesthetics & Options

TRIM	FINISH	COLOR TEMP
<b>Not Applicable</b>	<b>BK</b> - Matte Black (Standard) <b>MW</b> - Matte White (Standard) <b>PL</b> - Platinum	<b>30K</b> - 3000K Color Temp. <b>35K</b> - 3500K Color Temp. <b>40K</b> - 4000K Color Temp.
ORDER INFO		
Not Applicable Example ^	BK	30K

PROD	SOURCE	30K SPECS	40K SPECS
<b>CYR1T-XXL</b>	L60.0	<ul style="list-style-type: none"> <li>• 30K - 3000K Color Temp</li> <li>• 4900 LED Source Lumens</li> <li>• 81.6 Lumens Per Watt</li> <li>• 80 CRI</li> </ul>	<ul style="list-style-type: none"> <li>• 40K - 4000K Color Temp</li> <li>• 5000 LED Source Lumens</li> <li>• 83.3 Lumens Per Watt</li> <li>• 80 CRI</li> </ul>

REPLACEMENT PART	PART NO	NOTES



**TERONLIGHTING.COM**  
 33 DONALD DR, FAIRFIELD, OH 45014  
 P: 513.858.6004 F: 513.858.6038  
 E: SALES@TERONLIGHT.COM

We reserve the right to revise the design components of any product due to parts availability or change in UL standards, without assuming any obligation or liability to modify any products previously manufactured, and without notice.