

CYPRESS 2T SM LED

Architectural Indoor



PROJECT:	
TYPE:	
PO#:	QTY:
COMMENTS:	




FEATURES

- 0-10V Dimmable
- Low Profile Seamless Aluminum Frame
- Acrylic Lens
- LED Light Fixture
- Rectangular Driver Box Hanging System (Standard)
- UL Listed Dry Location For Ceiling Mount

LINE DRAWING

LINE DRAWING NOT TO SCALE

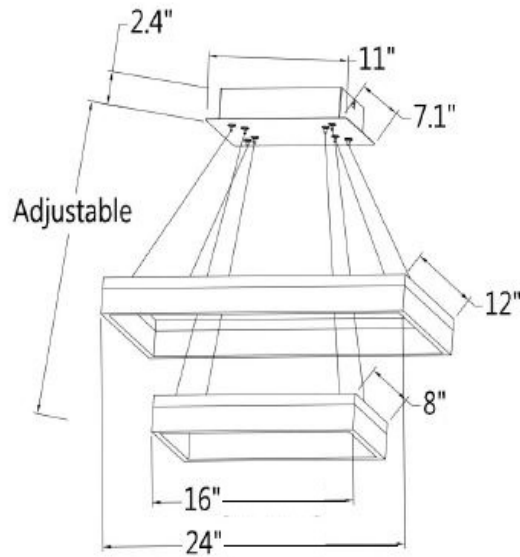


FINISHES

Matte Black

Matte White

Platinum



CYPRESS 2T SM LED

Architectural Indoor



Fixture Core

PROJECT:	
TYPE:	
PO#:	QTY:
COMMENTS:	

PRODUCT CODE	SOURCE/WATTAGE	VOLTAGE	DIMMING DRIVER
CYR2T-SM - Cypress 2 Tier 16" x 8" and 24" x 12"	L50.0-ZE1025mA - 50.0W @ 1025mA Dimming Driver	120V - 277V	0-10V Dimming
ORDER INFO			
CYR2T-SM Example ^	L20.0-ZE470	120-277V	Not Applicable

Aesthetics & Options

TRIM	FINISH	COLOR TEMP
Not Applicable	BK - Matte Black (Standard) MW - Matte White (Standard) PL - Platinum	30K - 3000K Color Temp. 40K - 4000K Color Temp.
ORDER INFO		
Not Applicable Example ^	BK	30K

PROD	SOURCE	30K SPECS	40K SPECS
CYR2T-SM	L50.0	<ul style="list-style-type: none"> • 30K - 3000K Color Temp • 1500 LED Source Lumens • 75 Lumens Per Watt • 80 CRI 	<ul style="list-style-type: none"> • 40K - 4000K Color Temp • 1600 LED Source Lumens • 80 Lumens Per Watt • 80 CRI

REPLACEMENT PART	PART NO	NOTES



TERONLIGHTING.COM
 33 DONALD DR, FAIRFIELD, OH 45014
 P: 513.858.6004 F: 513.858.6038
 E: SALES@TERONLIGHT.COM

We reserve the right to revise the design components of any product due to parts availability or change in UL standards, without assuming any obligation or liability to modify any products previously manufactured, and without notice.