

DORIAN LED

Architectural Indoor



PROJECT:	
TYPE:	
PO#:	QTY:
COMMENTS:	




FEATURES

- 0-10V Dimmable Driver
- Aluminum Frame
- Frosted Acrylic Diffuser
- LED Light Fixture
- Rectangular Driver Box Hanging System
- Suspended LED Rectangle Depth: 12.4"
- Suspended LED Rectangle Thickness: 0.3"
- Suspended LED Rectangle Width: 39.4"
- Suspension Cables Are 6' Long and Field Adjustable
- UL Listed Fixture Dry Location

LINE DRAWING

LINE DRAWING NOT TO SCALE

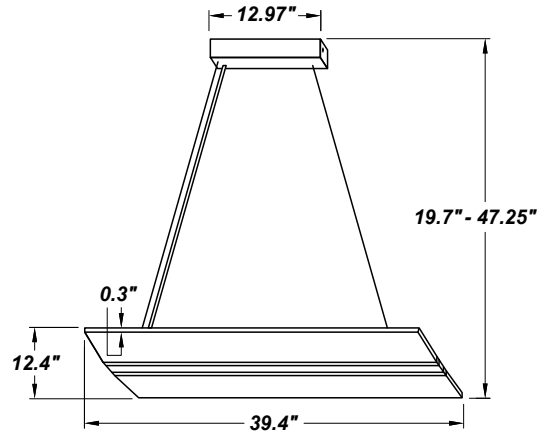

FINISHES

Matte White

Platinum



DORIAN LED

Architectural Indoor



Fixture Core

PROJECT:	
TYPE:	
PO#:	QTY:
COMMENTS:	

PRODUCT CODE	SOURCE/WATTAGE	VOLTAGE	DIMMING DRIVER
DRN - Dorian	L40.0 - ZE960 - 40W @ 960mA 0-10V Dimming Driver	120-277V (50-60Hz)	0-10V Dimming
ORDER INFO			
DRN Example ^	L40.0 - ZE960	120-277V	Not Applicable

Aesthetics & Options

TRIM	FINISH	COLOR TEMP
Not Applicable	PL - Platinum MW - Matte White	30K - 3000K Color Temp. 40K - 4000K Color Temp. 50K - 5000K Color Temp.
ORDER INFO		
Not Applicable Example ^	MW	30K

PROD	SOURCE	30K SPECS
DRN	L40.0	<ul style="list-style-type: none"> 30K - 3000K Color Temp 3300 LED Source Lumens 75 Lumens Per Watt

REPLACEMENT PART	PART NO	NOTES
		Minimum Starting Temperature = -40 Degrees C



TERONLIGHTING.COM
 33 DONALD DR, FAIRFIELD, OH 45014
 P: 513.858.6004 F: 513.858.6038
 E: SALES@TERONLIGHT.COM

We reserve the right to revise the design components of any product due to parts availability or change in UL standards, without assuming any obligation or liability to modify any products previously manufactured, and without notice.