

EPSILON PD BFP LED 15"

Architectural Indoor



PROJECT:	
TYPE:	
PO#:	QTY:
COMMENTS:	




FEATURES

- Energy Star
- ETL/cETL Listed Damp Location For Ceiling or Wall Mount
- LED Light Fixture
- Mounts Directly to Surface w/ Two Wall Anchors
- Steel Housing with Brushed Nickel Finish
- White Frosted Glass Diffuser

LINE DRAWING

LINE DRAWING NOT TO SCALE

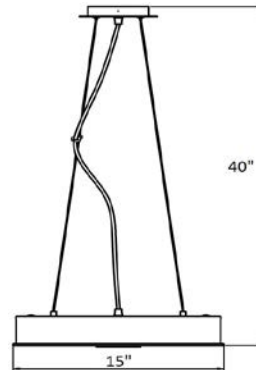

FINISHES

Brushed
Nickel



EPSILON PD BFP LED 15"

Architectural Indoor



Fixture Core

PROJECT:	
TYPE:	
PO#:	QTY:
COMMENTS:	

PRODUCT CODE	SOURCE/WATTAGE	VOLTAGE	DIMMING DRIVER
EN15PD - Epsilon 15"	L24.0-700 - (1) 24W @ 700mA	120V - 277V	Not Applicable
ORDER INFO			
EN15PD Example ^	L24.0-700	120/277V	Not Applicable

Aesthetics & Options

TRIM	FINISH	COLOR TEMP	OPTIONS
Not Applicable	BN - Brushed Nickel (Standard)	30K - 3000K Color Temp. 40K - 4000K Color Temp.	Not Applicable
ORDER INFO			
Not Applicable Example ^	BN	30K	Not Applicable

PROD	SOURCE	40K SPECS				
EN15PD	L24.0	<ul style="list-style-type: none"> 40K - 4000K Color Temp 1854 LED Delivered Lumens 77.3 LED Delivered Lumens Per Watt 				

REPLACEMENT PART	PART NO	NOTES
		L70 >50,000 hrs Minimum Starting Temperature = -20 Degrees C



TERONLIGHTING.COM
 33 DONALD DR, FAIRFIELD, OH 45014
 P: 513.858.6004 F: 513.858.6038
 E: SALES@TERONLIGHT.COM

We reserve the right to revise the design components of any product due to parts availability or change in UL standards, without assuming any obligation or liability to modify any products previously manufactured, and without notice.