

# CUTLASS BFP LED

Architectural Outdoor



PROJECT:	
TYPE:	
PO#:	QTY:
COMMENTS:	




## FEATURES

- Aluminum Die Cast Housing
- ADA Compliant (15W, 30W only)
- UV-anti PC Cover
- L70 Life Span > 50,000 Hours
- Weight: 1.5Kg for 15W, 1.8Kg for 30W, 2.8Kg for 50W
- Mounting Hardware Included
- Dark Sky Compliant Mounting
- LED Light Fixture
- UL Listed Wet Location For Wall Mount
- 0-10V Dimmable Driver
- DLC Listed

## LINE DRAWING

LINE DRAWING NOT TO SCALE

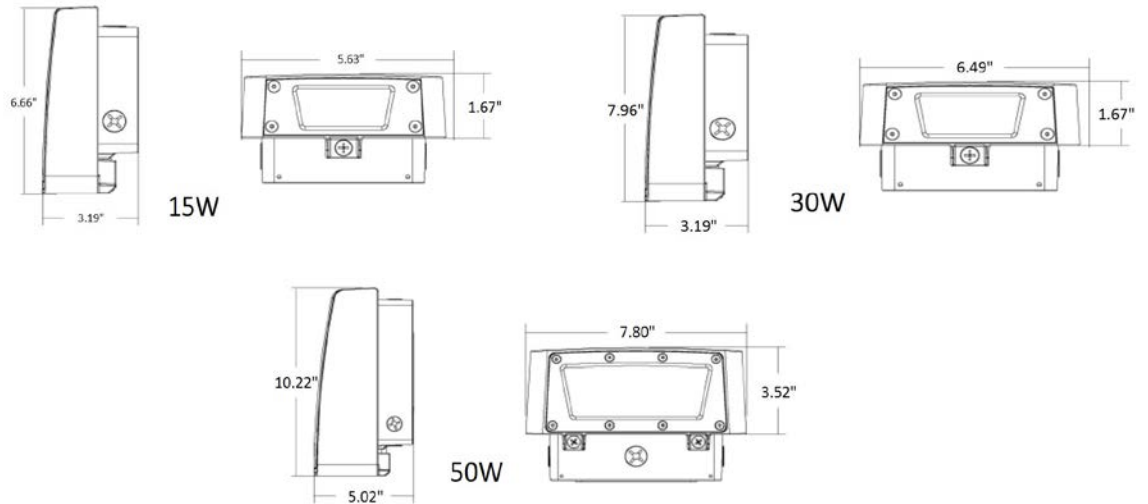

## FINISHES

Bronze



# CUTLASS BFP LED

Architectural Outdoor



PROJECT:	
TYPE:	
PO#:	QTY:
COMMENTS:	

Fixture Core

PRODUCT CODE	SOURCE/WATTAGE	VOLTAGE	DIMMING DRIVER
<b>CLS</b> - Cutlass Budget Friendly LED	<b>L15.0</b> - 15.0W (LED Wattage 14W) <b>L30.0</b> - 30.0W (LED Wattage 27W)	<b>120/277V</b>	<b>0-10V</b>
ORDER INFO			
CLS Example ^	L15.0	120/277V	

Aesthetics & Options

TRIM	FINISH	COLOR TEMP
<b>Not Applicable</b>	<b>BZ - Bronze</b>	<b>40K - 4000K Color Temp.</b>
ORDER INFO		
Not Applicable Example ^	BZ	40K

PROD	SOURCE	40K SPECS
<b>CLS</b>	L15.0	<ul style="list-style-type: none"> <li>• 40K - 4000K Color Temp</li> <li>• 1633 LED Delivered Lumens</li> <li>• 103 Delivered Lumens Per Watt</li> <li>• 82 CRI</li> </ul>
	L30.0	<ul style="list-style-type: none"> <li>• 40K - 4000K Color Temp</li> <li>• 3071 LED Delivered Lumens</li> <li>• 101 Delivered Lumens Per Watt</li> <li>• 82 CRI</li> </ul>

REPLACEMENT PART	PART NO	NOTES



**TERONLIGHTING.COM**  
 33 DONALD DR, FAIRFIELD, OH 45014  
 P: 513.858.6004 F: 513.858.6038  
 E: SALES@TERONLIGHT.COM

We reserve the right to revise the design components of any product due to parts availability or change in UL standards, without assuming any obligation or liability to modify any products previously manufactured, and without notice.

# CUTLASS BFP LED

Architectural Outdoor



PROJECT:	
TYPE:	
PO#:	QTY:
COMMENTS:	

Fixture Core

PRODUCT CODE	SOURCE/WATTAGE	VOLTAGE	DIMMING DRIVER
<b>CLS - Cutlass Budget Friendly LED</b>	<b>L50.0 - 50.0W (LED Wattage 45W)</b>	<b>120/277V</b>	
ORDER INFO			
CLS Example ^	L50.0	120/277V	

Aesthetics & Options

TRIM	FINISH	COLOR TEMP	
<b>Not Applicable</b>	<b>BZ - Bronze</b>	<b>40K - 4000K Color Temp.</b>	
ORDER INFO			
Not Applicable Example ^	BZ	40K	

PROD	SOURCE	40K SPECS				
<b>CLS</b>	L50.0	<ul style="list-style-type: none"> <li>• 40K - 4000K Color Temp</li> <li>• 5003 LED Delivered Lumens</li> <li>• 102 Delivered Lumens Per Watt</li> <li>• 82 CRI</li> </ul>				

REPLACEMENT PART	PART NO	NOTES



**TERONLIGHTING.COM**  
 33 DONALD DR, FAIRFIELD, OH 45014  
 P: 513.858.6004 F: 513.858.6038  
 E: SALES@TERONLIGHT.COM

We reserve the right to revise the design components of any product due to parts availability or change in UL standards, without assuming any obligation or liability to modify any products previously manufactured, and without notice.