

# SYMPHONY RND LED

Architectural Indoor




|           |      |
|-----------|------|
| PROJECT:  |      |
| TYPE:     |      |
| PO#:      | QTY: |
| COMMENTS: |      |

## FEATURES

- Aluminum Fascia
- Arm & Mount Pan w/ Standard Matte Silver Powder Coat Finish
- Indirect Lighting Source
- Aluminum Mounting Plate Mounts to Wall Surface (Centered Over and Attached to J-box)
- LED Light Source
- Surge Protector - (Optional)
- UL Class 2 Driver
- Dimmable @ 120V and 277V
- ADA Compliant
- CSA Listed Dry Location For Wall Mount
- LED Light Fixture
- Mounting Hardware Included

## LINE DRAWING

LINE DRAWING NOT TO SCALE

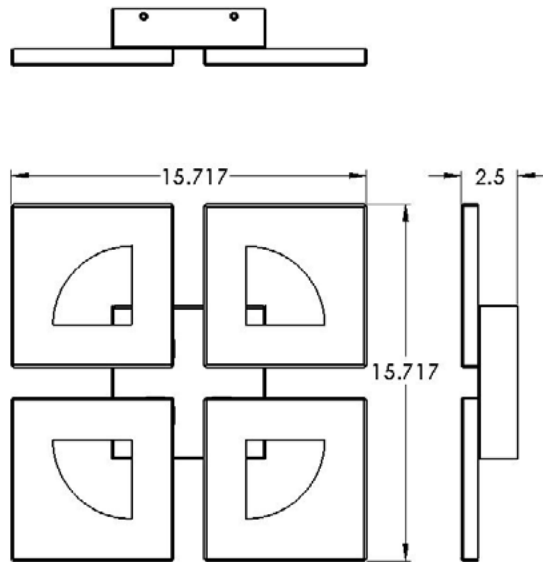


## FINISHES


Antique Copper




Antique Silver




Bronze Mist




Matte Silver



Sand




Swedish Steel




Textured Black



Textured Bronze



Textured White



For RAL Colors & Custom Match - Contact Teron Lighting Inc.



TERONLIGHTING.COM  
33 DONALD DR, FAIRFIELD, OH 45014  
P: 513.858.6004 F: 513.858.6038  
E: SALES@TERONLIGHT.COM



We reserve the right to revise the design components of any product due to parts availability or change in UL standards, without assuming any obligation or liability to modify any products previously manufactured, and without notice.

# SYMPHONY RND LED

Architectural Indoor



Fixture Core

|           |      |
|-----------|------|
| PROJECT:  |      |
| TYPE:     |      |
| PO#:      | QTY: |
| COMMENTS: |      |

| PRODUCT CODE       | SOURCE/WATTAGE  | VOLTAGE                        | DIMMING DRIVER        |
|--------------------|---|--------------------------------|-----------------------|
| RND - Symphony RND | <b>L16.4-ZE500</b> - 16.4W Strips @ 500mA 4-Wire Dimming Driver (Dimmable 0-10V)<br><b>L16.0-LT500</b> - 16.0W Strips @ 500mA 2-Wire Dimming Driver (Leading & Trailing Edge) | <b>120-277V</b><br>(50 / 60Hz) | <b>Not Applicable</b> |
| ORDER INFO         |   |                                |                       |
| RND<br>Example ^   | L16.4-ZE500   | 120-277V                       | Not Applicable        |

Aesthetics & Options

| TRIM                        | FINISH  | COLOR TEMP  | OPTIONS                             |
|-----------------------------|---|---|-------------------------------------|
| <b>Not Applicable</b>       | <b>AC</b> - Antique Copper<br><b>AS</b> - Antique Silver<br><b>SM</b> - Matte Silver (Standard)<br><b>SN</b> - Sand<br><b>SW</b> - Swedish Steel<br><b>TB</b> - Textured Black<br><b>BZ</b> - Textured Bronze<br><b>TW</b> - Textured White | <b>27K</b> - 2700K Color Temp<br><b>30K</b> - 3000K Color Temp<br><b>35K</b> - 3500K Color Temp<br><b>40K</b> - 4000K Color Temp<br><b>50K</b> - 5000K Color Temp | <b>S</b> - Surge Protector 120/277V |
| ORDER INFO                  |   |   |                                     |
| Not Applicable<br>Example ^ | AC  | 27K   | S                                   |

| PROD | SOURCE |  |  |  |  |
|------|--------|--|--|--|--|
| RND  | L16.4  | <ul style="list-style-type: none"> <li>30K - 3000K Color Temp</li> <li>2378 LED Source Lumens</li> <li>145 LED Source Lumens Per Watt</li> </ul> |  |  |  |

| REPLACEMENT PART | PART NO | NOTES   |
|------------------|---------|---|
|                  |         | Don't see the configuration you are looking for?<br>Call us today at (513) 858-6004 |



**TERONLIGHTING.COM**  
 33 DONALD DR, FAIRFIELD, OH 45014  
 P: 513.858.6004 F: 513.858.6038  
 E: SALES@TERONLIGHT.COM



We reserve the right to revise the design components of any product due to parts availability or change in UL standards, without assuming any obligation or liability to modify any products previously manufactured, and without notice.