

CATALON BFP LED

Architectural Outdoor



PROJECT:	
TYPE:	
PO#:	QTY:
COMMENTS:	




FEATURES

- Aluminum Die-Cast Housing
- UV Stabalized Polycarbonate Lens
- L70 Life Span >50,000 Hours
- Mounting Hardware Included
- Wall Mount and Knuckle Mount Included
- Weight: 0.55 Kg for 15W, 0.67 Kg for 28W, 1.92 Kgs for 50W
- LED Light Fixture
- IP 65 Rated
- UL Listed Wet Location for Wall Mount
- DLC Listed

LINE DRAWING

LINE DRAWING NOT TO SCALE

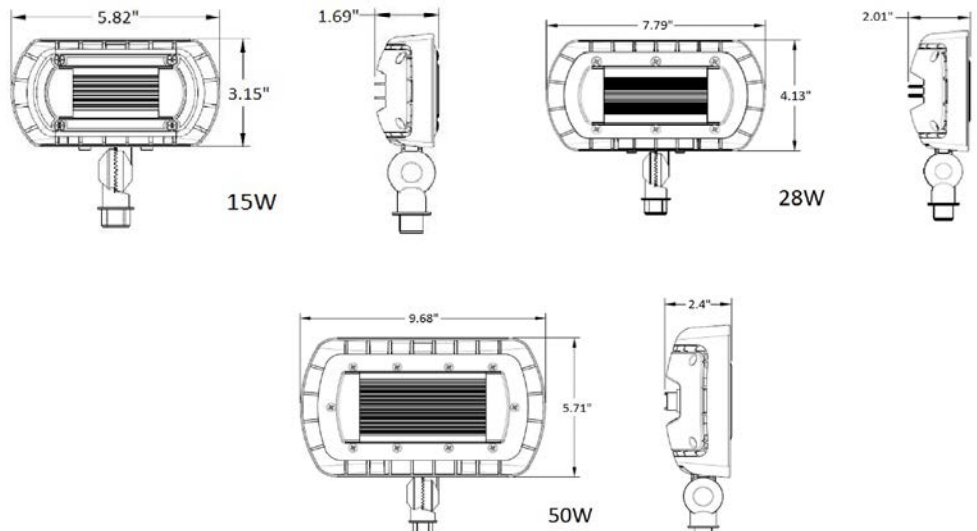

FINISHES

Bronze



CATALON BFP LED

Architectural Outdoor



Fixture Core

PROJECT:	
TYPE:	
PO#:	QTY:
COMMENTS:	

PRODUCT CODE	SOURCE/WATTAGE	VOLTAGE	DIMMING DRIVER
CTL - Catalon Budget Friendly	L15.0 - 15.0W L28.0 - 28.0W	120V/277V	Not Applicable
ORDER INFO			
CTL Example ^	L15.0	120/277V	Not Applicable

Aesthetics & Options

TRIM	FINISH	COLOR TEMP
Not Applicable	BZ - Bronze	30K - 3000K Color Temp. 40K - 4000K Color Temp.
ORDER INFO		
Not Applicable Example ^	BZ	40K

PROD	SOURCE	30K SPECS	40K SPECS
CTL	L15.0	<ul style="list-style-type: none"> 30K - 3000K Color Temp 1486.5 LED Delivered Lumens 94.02 Lumens Per Watt 70 CRI 	<ul style="list-style-type: none"> 40K - 4000K Color Temp 1509.9 LED Delivered Lumens 97.15 Lumens Per Watt 70 CRI
	L28.0	<ul style="list-style-type: none"> 30K - 3000K Color Temp 3246.8 LED Delivered Lumens 101.68 Lumens Per Watt 70 CRI 	<ul style="list-style-type: none"> 40K - 4000K Color Temp 3312.6 LED Delivered Lumens 104.1 Lumens Per Watt 70 CRI

REPLACEMENT PART	PART NO	NOTES



TERONLIGHTING.COM
 33 DONALD DR, FAIRFIELD, OH 45014
 P: 513.858.6004 F: 513.858.6038
 E: SALES@TERONLIGHT.COM

We reserve the right to revise the design components of any product due to parts availability or change in UL standards, without assuming any obligation or liability to modify any products previously manufactured, and without notice.

CATALON BFP LED

Architectural Outdoor



Fixture Core

PROJECT:	
TYPE:	
PO#:	QTY:
COMMENTS:	

PRODUCT CODE	SOURCE/WATTAGE	VOLTAGE	DIMMING DRIVER
CTL - Catalon Budget Friendly	L50.0 - 50.0W	120V/277V	Not Applicable
ORDER INFO			
CTL Example ^	L50.0	120/277V	Not Applicable

Aesthetics & Options

TRIM	FINISH	COLOR TEMP
Not Applicable	BZ - Bronze	40K - 4000K Color Temp.
ORDER INFO		
Not Applicable Example ^	BZ	40K

PROD	SOURCE	30K SPECS	40K SPECS
CTL	L50.0	<ul style="list-style-type: none"> • 30K - 3000K Color Temp • 5285.5 LED Deliviered Lumens • 107.43 Lumens Per Watt • 70 CRI 	<ul style="list-style-type: none"> • 40K - 4000K Color Temp • 5404.9 LED Deliviered Lumens • 110.1 Lumens Per Watt • 70 CRI

REPLACEMENT PART	PART NO	NOTES



TERONLIGHTING.COM
 33 DONALD DR, FAIRFIELD, OH 45014
 P: 513.858.6004 F: 513.858.6038
 E: SALES@TERONLIGHT.COM

We reserve the right to revise the design components of any product due to parts availability or change in UL standards, without assuming any obligation or liability to modify any products previously manufactured, and without notice.