

MARQUEE 2T LG LED

Architectural Indoor



PROJECT:	
TYPE:	
PO#:	QTY:
COMMENTS:	




FEATURES

- 0-10V Dimmable
- Low Profile Seamless Aluminum Frame
- Acrylic Lens
- LED Light Fixture
- Rectangular Driver Box Hanging System (Standard)
- UL Listed Dry Location For Ceiling Mount

LINE DRAWING

LINE DRAWING NOT TO SCALE

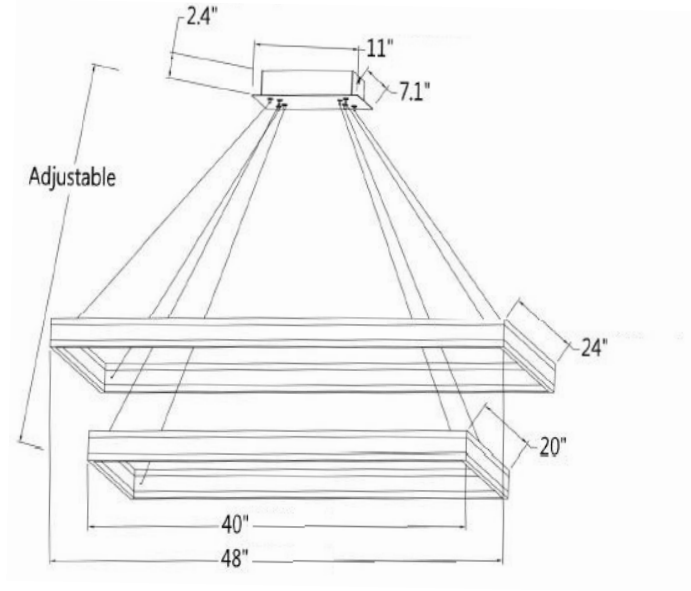

FINISHES

Matte Black

Matte White

Platinum



MARQUEE 2T LG LED

Architectural Indoor



Fixture Core

PROJECT:	
TYPE:	
PO#:	QTY:
COMMENTS:	

PRODUCT CODE	SOURCE/WATTAGE	VOLTAGE	DIMMING DRIVER
MRQ2T-LG - Cypress 2 Tier 40" x 20" and 48" x 24"	L90.0-ZE960mA - 90.0W @ 960mA Dimming Driver	120V - 277V	ZE - 0-10V Dimming
ORDER INFO			
MRQ2T-LG Example ^	L90.0-ZE960	120-277V	Not Applicable

Aesthetics & Options

TRIM	FINISH	COLOR TEMP
Not Applicable	BK - Matte Black (Standard) MW - Matte White (Standard) PL - Platinum	30K - 3000K Color Temp. 40K - 4000K Color Temp.
ORDER INFO		
Not Applicable Example ^	BK	30K

PROD	SOURCE	30K SPECS	40K SPECS
MRQ2T-LG	L90.0	<ul style="list-style-type: none"> • 30K - 3000K Color Temp • 3200 LED Source Lumens • 80 Lumens Per Watt • 80 CRI 	<ul style="list-style-type: none"> • 40K - 4000K Color Temp • 3300 LED Source Lumens • 82.5 Lumens Per Watt • 80 CRI

REPLACEMENT PART	PART NO	NOTES



TERONLIGHTING.COM
 33 DONALD DR, FAIRFIELD, OH 45014
 P: 513.858.6004 F: 513.858.6038
 E: SALES@TERONLIGHT.COM

We reserve the right to revise the design components of any product due to parts availability or change in UL standards, without assuming any obligation or liability to modify any products previously manufactured, and without notice.