

SYMPHONY SQR LED

Architectural Indoor




PROJECT:	
TYPE:	
PO#:	QTY:
COMMENTS:	

FEATURES

- Aluminum Fascia
- Arm & Mount Pan w/ Standard Matte Silver Powder Coat Finish
- Indirect Lighting Source
- Aluminum Mounting Plate Mounts to Wall Surface (Centered Over and Attached to J-box)
- LED Light Source
- Surge Protector - (Optional)
- UL Class 2 Driver
- Dimmable @ 120V and 277V
- ADA Compliant
- CSA Listed Dry Location For Wall Mount
- LED Light Fixture
- Mounting Hardware Included

LINE DRAWING

LINE DRAWING NOT TO SCALE

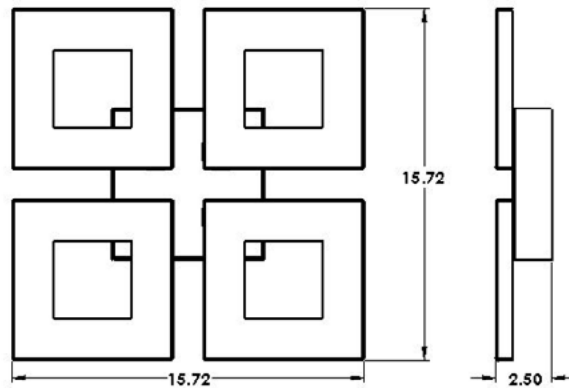


FINISHES


Antique Copper




Antique Silver




Bronze Mist




Matte Silver



Sand




Swedish Steel




Textured Black



Textured Bronze



Textured White



For RAL Colors & Custom Match - Contact Teron Lighting Inc.



TERONLIGHTING.COM
 33 DONALD DR, FAIRFIELD, OH 45014
 P: 513.858.6004 F: 513.858.6038
 E: SALES@TERONLIGHT.COM



We reserve the right to revise the design components of any product due to parts availability or change in UL standards, without assuming any obligation or liability to modify any products previously manufactured, and without notice.

SYMPHONY SQR LED

Architectural Indoor



Fixture Core

PROJECT:	
TYPE:	
PO#:	QTY:
COMMENTS:	

PRODUCT CODE	SOURCE/WATTAGE	VOLTAGE	DIMMING DRIVER
SQR - Symphony SQR	L16.4-ZE500 - 16.4W Strips @ 500mA 4-Wire Dimming Driver (Dimmable 0-10V) L16.0-LT500 - 16.0W Strips @ 500mA 2-Wire Dimming Driver (Leading & Trailing Edge)	120-277V (50 / 60Hz)	Not Applicable
ORDER INFO			
SQR	L16.4-ZE500	120-277V	Not Applicable
Example ^			

Aesthetics & Options

TRIM	FINISH	COLOR TEMP	OPTIONS
Not Applicable	AC - Antique Copper AS - Antique Silver SM - Matte Silver (Standard) SN - Sand SW - Swedish Steel TB - Textured Black BZ - Textured Bronze TW - Textured White	27K - 2700K Color Temp 30K - 3000K Color Temp 35K - 3500K Color Temp 40K - 4000K Color Temp 50K - 5000K Color Temp	S - Surge Protector 120/277V
ORDER INFO			
Not Applicable	AC	27K	S
Example ^			

PROD	SOURCE	30K SPECS			
SQR	L16.4	<ul style="list-style-type: none"> 30K - 3000K Color Temp 2378 LED Source Lumens 145 LED Source Lumens Per Watt 			

REPLACEMENT PART	PART NO	NOTES
		Don't see the configuration you are looking for? Call us today at (513) 858-6004



TERONLIGHTING.COM
 33 DONALD DR, FAIRFIELD, OH 45014
 P: 513.858.6004 F: 513.858.6038
 E: SALES@TERONLIGHT.COM



We reserve the right to revise the design components of any product due to parts availability or change in UL standards, without assuming any obligation or liability to modify any products previously manufactured, and without notice.