

# HOLLYWOOD PARK XLARGE 24"


Architectural Indoor



PROJECT:		
TYPE:		
PO#:		QTY:
COMMENTS:		


## FEATURES

- Aluminium Mounting Pan
- CSA Listed Damp Location Wall and Ceiling
- LED Light Fixture
- Luminous Fabric Diffuser
- Mounts Directly to 4" Junction Box (By Others)
- Mounting Hardware Included



## LINE DRAWING

LINE DRAWING NOT TO SCALE

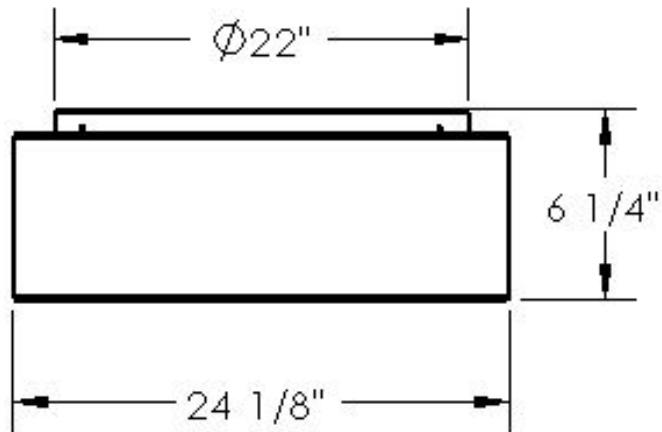


## FINISHES

Bleached Linen



Cream Linen




Espresso Linen



Platinum Linen



Textured Eggshell



For RAL Colors & Custom Match - Contact Teron Lighting Inc.

# HOLLYWOOD PARK XLARGE 24"

Architectural Indoor



Fixture Core

PROJECT:	
TYPE:	
PO#:	QTY:
COMMENTS:	

PRODUCT CODE	SOURCE/WATTAGE	VOLTAGE	DIMMING DRIVER
HPKXL - Hollywood Park X-Large	<b>L20.5-ZE640</b> - (80) LED Array @ Line Voltage 4-Wire Dimming Driver (Dimmable 0 - 10V) <b>L30.0-ZE1000</b> - (80) LED Array @ Line Voltage 4-Wire Dimming Driver (Dimmable 0 - 10V)	<b>120-277V</b> (50 / 60Hz)	<b>Not Applicable</b>
ORDER INFO			
HPKXL Example ^	L20.5-ZE640	120-277V	Not Applicable

Aesthetics & Options

TRIM	FINISH	COLOR TEMP	OPTIONS
<b>Not Applicable</b>	<b>BLF</b> - Bleached Linen Fabric <b>CLF</b> - Cream Linen Fabric <b>TEF</b> - Textured Eggshell Fabric <b>ESF</b> - Espresso Linen Fabric <b>PLF</b> - Platinum Linen Fabric	<b>30K</b> - 3000K Color Temp <b>35K</b> - 3500K Color Temp <b>40K</b> - 4000K Color Temp <b>50K</b> - 5000K Color Temp	<b>EB/BB</b> - Bodine BSL26 - Up to 5.1W Emergency Illumination w/ LEDs (Back Box Required)** <b>F</b> - Fused <b>LC</b> - Laminate Coating (See Notes Below) <b>MSI1</b> - Internal Motion Sensor <b>MSI2</b> - Internal Motion Sensor <b>STC12-WH</b> - 12" Stem and Canopy Kit <b>STC24-WH</b> - 24" Stem and Canopy Kit <b>STC36-WH</b> - 36" Stem and Canopy Kit <b>STC48-WH</b> - 48" Stem and Canopy Kit
ORDER INFO			
Not Applicable Example ^	BLF	30K	EB/BB

PROD	SOURCE	30K SPECS				
HPKXL	L20.5	<ul style="list-style-type: none"> <li>80 CRI Typ.</li> <li>30K - 3000K Color Tem</li> <li>3100 LED Source Lumens</li> </ul>				
	L30.0	<ul style="list-style-type: none"> <li>151 LED Source Lumens Per Watt</li> <li>80 CRI Typ.</li> <li>30K - 3000K Color Tem</li> <li>4522 LED Source LumenS</li> <li>134 LED Source Lumens Per Watt</li> </ul>				

REPLACEMENT PART	PART NO	NOTES
24" Platinum Linen	3043790	* Laminate Coating allows Lens to be easily wiped down with damp cloth. Not applicable to Textured Eggshell as it comes standard with Laminate Coating.
24" Textured Eggshell Linen	3043786	
24" Espresso Linen	3043787	
24" Cream Linen	3043791	
24" Bleached Linen	3043789	
		Don't see the configuration you are looking for? Call us today at (513) 858-6004



**TERONLIGHTING.COM**  
 33 DONALD DR, FAIRFIELD, OH 45014  
 P: 513.858.6004 F: 513.858.6038  
 E: SALES@TERONLIGHT.COM



We reserve the right to revise the design components of any product due to parts availability or change in UL standards, without assuming any obligation or liability to modify any products previously manufactured, and without notice.

# HOLLYWOOD PARK XLARGE 24"

Architectural Indoor



Fixture Core

PROJECT:	
TYPE:	
PO#:	QTY:
COMMENTS:	

PRODUCT CODE	SOURCE/WATTAGE	VOLTAGE	DIMMING DRIVER
HPKXL - Hollywood Park X-Large	<b>L37.5-ZE1000</b> - (120) LED Array @ Line Voltage 4-Wire Dimming Driver (Dimmable 0 - 10V) <b>L50.0-ZE1750</b> - (160) LED Array @ Line Voltage 4-Wire Dimming Driver (Dimmable 0 - 10V)	<b>120-277V</b> (50 / 60Hz)	<b>Not Applicable</b>
ORDER INFO			
HPKXL Example ^	L37.5-ZE1000	120-277V	Not Applicable

Aesthetics & Options

TRIM	FINISH	COLOR TEMP	OPTIONS
<b>Not Applicable</b>	<b>BLF</b> - Bleached Linen Fabric <b>CLF</b> - Cream Linen Fabric <b>TEF</b> - Textured Eggshell Fabric <b>ESF</b> - Espresso Linen Fabric <b>PLF</b> - Platinum Linen Fabric	<b>30K</b> - 3000K Color Temp <b>35K</b> - 3500K Color Temp <b>40K</b> - 4000K Color Temp <b>50K</b> - 5000K Color Temp	<b>EB/BB</b> - Bodine BSL26 - Up to 5.1W Emergency Illumination w/ LEDs (Back Box Required)** <b>F</b> - Fused <b>LC</b> - Laminate Coating (See Notes Below) <b>MSI1</b> - Internal Motion Sensor <b>MSI2</b> - Internal Motion Sensor <b>STC12-WH</b> - 12" Stem and Canopy Kit <b>STC24-WH</b> - 24" Stem and Canopy Kit <b>STC36-WH</b> - 36" Stem and Canopy Kit <b>STC48-WH</b> - 48" Stem and Canopy Kit
ORDER INFO			
Not Applicable Example ^	BLF	30K	EB/BB

PROD	SOURCE	30K SPECS				
HPKXL	L37.5	<ul style="list-style-type: none"> <li>80 CRI Typ.</li> <li>30K - 3000K Color Tem</li> <li>4845 LED Source Lumens</li> <li>135.4 LED Source Lumens Per Watt</li> </ul>				
	L50.0	<ul style="list-style-type: none"> <li>30K - 3000K Color Temp</li> <li>8075 LED Source Lumens</li> <li>161.5 LED Source Lumens Per Watt</li> </ul>				

REPLACEMENT PART	PART NO	NOTES
24" Platinum Linen	3043790	* Laminate Coating allows Lens to be easily wiped down with damp cloth. Not applicable to Textured Eggshell as it comes standard with Laminate Coating.
24" Textured Eggshell Linen	3043786	
24" Espresso Linen	3043787	
24" Cream Linen	3043791	
24" Bleached Linen	3043789	
		Don't see the configuration you are looking for? Call us today at (513) 858-6004



**TERONLIGHTING.COM**  
 33 DONALD DR, FAIRFIELD, OH 45014  
 P: 513.858.6004 F: 513.858.6038  
 E: SALES@TERONLIGHT.COM



We reserve the right to revise the design components of any product due to parts availability or change in UL standards, without assuming any obligation or liability to modify any products previously manufactured, and without notice.