Architectural Indoor 📕

St i 📼 🍹




FEATURES

- CSA Listed Damp Location
- Die-Form Cold-Rolled Steel Housing w/ Brushed Nickel Plated Finish

PROJECT: TYPE: PO#:

COMMENTS:

- Emergency Battery Available
- LED Light Fixture
- Luminous Acrylic Diffuser
- Mounts Directly to 4" Junction Box (By Others)
- Mounting Hardware Included
- Steel Trim w/ Brushed Nickel Plated Finish
- Steel Mounting Pan w/ Hi-Reflectance White Powder Coat Finish

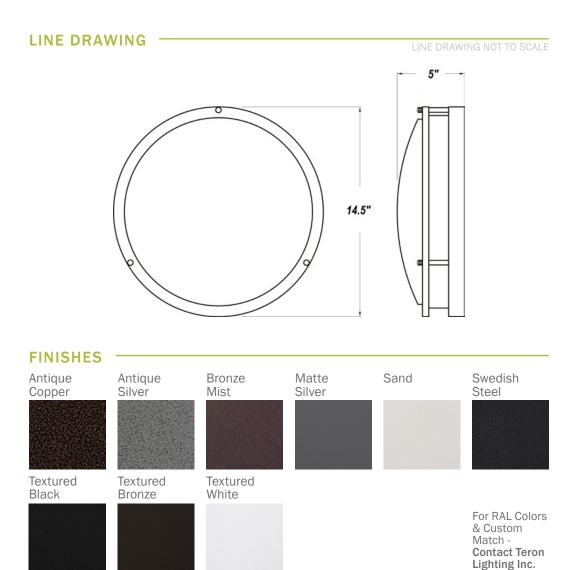



 TERONLIGHTING.COM

 33 DONALD DR, FAIRFIELD, OH 45014

 P: 513.858.6004
 F: 513.858.6038

 E: SALES@TERONLIGHT.COM



We reserve the right to revise the design components of any product due to parts availability or change in UL standards, without assuming any obligation or liability to modify any products previously manufactured, and without notice. 1

QTY:

Architectural Indoor

i 🗊 ₮

PRODUCT CODE

SP:

Fixture Core

QTY:

DIMMING DRIVER

COMMENTS:

VOLTAGE

PROJECT: TYPE:

PO#:

SOURCE/WATTAGE

NECEB14 - Nike C EB 14"		L13.0-ZE560 - (64) LED Array @ 560mA Line Voltage 4-Wire Dimming Driver (Dimmable 0 - 10V L16.3-ZE560 - (80) LED Array @ 560mA Line Voltage 4-Wire Dimming Driver (Dimmable 0 - 10V	(50 / 60Hz)	Not Applicable	
ORDER INFO					
NECEB14 Example ^		L13.0-ZE560	120V	Not Applicable	
Aesthetics &	Options				
TRIM		FINISH	COLOR TEMP	OPTIONS	
Not Applicable		AC - Antique CopperSW - Swedish SteelAS - Antique SilverSteelBT - Bronze MistTB - Textured BlackBN - Brushed Nickel (Standard)BZ - Textured BronzeSM - Matte SilverTW - Textured White	35K - 3500K Color Temp 40K - 4000K Color Temp 50K - 5000K Color Temp	EB5 -5W Emergency Integral LED Driver (EB option not available on the L36.0)	
ORDER INFO					
Not Applica Example ^	ble	AC	ЗОК	EB5	
PROD	SOURCE	30K SPECS			
NECEB14	L13.0 L16.3	 30K - 3000K Color Temp 1700 LED Source Lumens 105 LED Source Lumens Per Watt 986 Delivered LED Lumens 65.5 Delivered LED Lumens Per Watt 80 CRI Typ. 30K - 3000K Color Temp 2110 LED Source Lumens 103 LED Source Lumens Per Watt 1530 Delivered LED Lumens 82.3 Delivered LED Lumens Per Watt 			
REPLAC	EMENT PART	PART NO NOTES EB5 Not Available			
				n't see the configuration you are looking for? I us today at (513) 858-6004	
TERON L	33 DC P: 513	NLIGHTING.COM DNALD DR, FAIRFIELD, OH 45014 3.858.6004 F: 513.858.6038 LES@TERONLIGHT.COM	parts availability or change in UL st	lesign components of any product due to andards, without assuming any obligation or viously manufactured, and without notice. 2	

Architectural Indoor

SP 🖬 💷 ₮

PROJECT:
TYPE:
PO#:

COMMENTS:

QTY:

Fixture Core			
PRODUCT CODE	SOURCE/WATTAGE	VOLTAGE	DIMMING DRIVER
NECEB14 - Nike C EB 14"	L21.0-ZE700 - (80) LED Array @ 700mA Line Voltage 4-Wire Dimming Driver (Dimmable 0 - 10V) L24.0-ZE750 - (120) LED Array @ 750mA Line Voltage 4-Wire Dimming Driver (Dimmable 0 - 10V)	120V 277V (50 / 60Hz)	Not Applicable
ORDER INFO			
NECEB14 Example ^	L21.0-ZE700	120V	Not Applicable
Aesthetics & Options			
TRIM	FINISH	COLOR TEMP	OPTIONS
Not Applicable	AC - Antique Copper AS - Antique Silver BT - Bronze Mist BT - Bronze Mist	30K - 3000K Color Temp 35K - 3500K Color Temp 40K - 4000K Color Temp	EB5 -5W Emergency Integral LED Driver (EB option not available on the L36.0)

ORDER INFO	BN - Brushed Nickel (Standard) SM - Matte Silver SN - Sand	Black BZ - Textured Bronze TW - Textured White	50K - 5000K Color Temp	
Not Applicable	AC		30K	EB5

PROD	SOURCE	30K SPECS
NECEB14	L21.0	 80 CRI Typ. 30K - 3000K Color Temp 2640 LED Source Lumens 105 LED Source Lumens Per Watt 1861 Delivered LED Lumens 77.4 Delivered LED Lumens Per Watt 80 CRI Typ.
		 30K - 3000K Color Temp 3000 LED Source Lumens 125 LED Source Lumens Per Watt

REPLACEMENT PART

EB5 Not Available on The L36.0

NOTES

Don't see the configuration you are looking for? Call us today at (513) 858-6004



TERONLIGHTING.COM 33 DONALD DR, FAIRFIELD, OH 45014 P: 513.858.6004 F: 513.858.6038 E: SALES@TERONLIGHT.COM



We reserve the right to revise the design components of any product due to parts availability or change in UL standards, without assuming any obligation or liability to modify any products previously manufactured, and without notice.

Architectural Indoor

SP 🖬 💷 🗿

PROJECT: TYPE: PO#: QTY: COMMENTS:

Fixture Core			
PRODUCT CODE	SOURCE/WATTAGE	VOLTAGE	DIMMING DRIVER
NECEB14 - Nike C EB 14"	L36.0-ZE1100 - (120) LED Array @ 1100mA Line Voltage 4-Wire Dimming Driver (Dimmable 0 - 10V)	120V 277V (50 / 60Hz)	Not Applicable
ORDER INFO			
NECEB14	L36.0-ZE1100	120V	Not Applicable
Example ^			

Aesthetics & Options

TRIM	FINISH		COLOR TEMP	OPTIONS
Not Applicable	AC - Antique Copper AS - Antique Silver BT - Bronze Mist BN - Brushed Nickel (Standard) SM - Matte Silver SN - Sand	SW - Swedish Steel TB - Textured Black BZ - Textured Bronze TW - Textured White	30K - 3000K Color Temp 35K - 3500K Color Temp 40K - 4000K Color Temp 50K - 5000K Color Temp	EB5 -5W Emergency Integral LED Driver (EB option not available on the L36.0)
ORDER INFO				
Not Applicable	AC		30K	EB5

PROD	SOURCE	30K SPECS		
NECEB14	L36.0	 SOK SPECS 80 CRI Typ. 30K - 3000K Color Temp 3800 LED Source Lumens 105.5 LED Source Lumens Per Watt 		

EB5 Not Available on The L36.0

NOTES

Don't see the configuration you are looking for? Call us today at (513) 858-6004



TERONLIGHTING.COM 33 DONALD DR, FAIRFIELD, OH 45014 P: 513.858.6004 F: 513.858.6038 E: SALES@TERONLIGHT.COM



We reserve the right to revise the design components of any product due to parts availability or change in UL standards, without assuming any obligation or liability to modify any products previously manufactured, and without notice.