Architectural Indoor

(R	4
(JH	








PROJECT: TYPE: PO#: QTY: COMMENTS:

FEATURES

- CSA Listed Damp Location
- Die-Form Cold-Rolled Steel Housing w/ Brushed Nickel Plated Finish
- Emergency Battery Available
- LED Light Fixture
- Luminous Acrylic Diffuser
- Mounts Directly to 4" Junction Box (By Others)
- Mounting Hardware Included
- Steel Trim w/ Brushed Nickel Plated Finish
- Steel Mounting Pan w/ Hi-Reflectance White Powder Coat Finish

LINE DRAWING

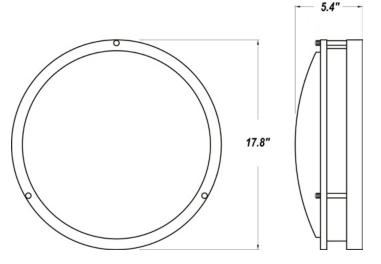

FINISHES

Antique Copper Textured

Black



Antique

Silver





Matte

Silver





For RAL Colors & Custom Match -**Contact Teron** Lighting Inc.





Architectural Indoor

(SP	LED	7
W		*

PROJECT:	
TYPE:	
PO#:	QTY:
COMMENTS:	

Fixture Core

PRODUCT CODE	SOURCE/WATTAGE	VOLTAGE	DIMMING DRIVER
NECEB18 - Nike C EB 18"	L21.0-ZE700 - (80) LED Array @ 700mA Line Voltage 4-Wire Dimming Driver (Dimmable 0 - 10V) L24.0-ZE750 - (120) LED Array @ 750mA Line Voltage 4-Wire Dimming Driver (Dimmable 0 - 10V)	120V 277V (50 / 60Hz)	Not Applicable
ORDER INFO			
NECEB18	L21.0-ZE700	120V	Not Applicable
Example ^			

Aesthetics & Options

SOURCE

TRIM	FINISH	COLOR TEMP	OPTIONS
Not Applicable	AS - Antique Silver BT - Bronze Mist BN - Brushed Nickel (Standard) BZ - Broi	Textured k 40K - 4000K Color Temp Textured ize 50K - 5000K Color Temp Textured Textured 50K - 5000K Color Temp	EB5 -5W Emergency Integral LED Drive
ORDER INFO			
Not Applicable	AC	30K	EB5

30K SPECS NECEB18 L21.0 • 30K - 3000K Color Temp • 2640 LED Source Lumens • 105 LED Source Lumens Per Watt • 1861 Delivered LED Lumens • 77.4 Delivered LED Lumens Per Watt • 30K - 3000K L24.0 Color Temp • 3000 LED Source Lumens • 125 LED Source Lumens Per Watt

REPLACEMENT PART	PART NO	NOTES
		Don't see the configuration you are looking for?
		Call us today at (513) 858-6004





Architectural Indoor



PROJECT:		
TYPE:		
PO#:	QTY:	
COMMENTS:		

Fixture Core

PRODUCT CODE	SOURCE/WATTAGE	VOLTAGE	DIMMING DRIVER
NECEB18 - Nike C EB 18"	L30.0-ZE1000 - (80) LED Array @ 1000mA Line Voltage 4-Wire Dimming Driver (Dimmable 0 - 10V) L36.0-ZE1000 - (120) LED Array @ 1000mA Line Voltage 4-Wire Dimming Driver (Dimmable 0 - 10V)	120V 277V (50 / 60Hz)	Not Applicable
ORDER INFO			
NECEB18	L30.0-ZE1000	120V	Not Applicable
Example ^			

Aesthetics & Options

TRIM	FINISH		COLOR TEMP	OPTIONS
Not Applicable	AS - Antique Silver BT - Bronze Mist BN - Brushed Nickel (Standard) SM - Matte Silver	SW - Swedish Steel TB - Textured Black BZ - Textured Bronze TW - Textured White	30K - 3000K Color Temp 35K - 3500K Color Temp 40K - 4000K Color Temp 50K - 5000K Color Temp	EB5 -5W Emergency Integral LED Driver
ORDER INFO				
Not Applicable Example ^	AC		30K	EB5

=/(0.11.p.0				
PROD	SOURCE	30K SPECS		
NECEB18	L30.0	30K - 3000K Color Temp 4907 LED Source Lumens 163.5 LED Source Lumens Per Watt		
	L36.0	30K - 3000K Color Temp 3800 LED Source Lumens 105.5 LED Source Lumens Per Watt		

NOTES	PART NO	REPLACEMENT PART
Don't see the configuration you are looking for?		
Call us today at (513) 858-6004		



BUY AMERICAN SINCE 1979

Architectural Indoor



PROJECT:	
TYPE:	
PO#:	QTY:
COMMENTS:	

Fixture Core

PRODUCT CODE	SOURCE/WATTAGE	VOLTAGE	DIMMING DRIVER
NECEB18 - Nike C EB 18"	L36.0-ZE1000 - (120) LED Array @ 1000mA Line Voltage 4-Wire Dimming Driver (Dimmable 0 - 10V) L37.5-ZE1100 - (120) LED Array @ 1100mA Line Voltage 4-Wire Dimming Driver (Dimmable 0 - 10V)	120V 277V (50 / 60Hz)	Not Applicable
ORDER INFO			
NECEB18	L36.0-ZE1000	120V	Not Applicable
Example ^	200.0 221000	∧	ποτηρησισίο

Aesthetics & Options

TRIM	FINISH	COLOR TEMP	OPTIONS
Not Applicable ORDER INFO	AS - Antique Silver BT - Bronze Mist BN - Brushed Nickel (Standard) SM - Matte Silver TV	N - Swedish eel 3 - Textured ack Z - Textured onze N - Textured hite 30K - 3000K Color Temp 40K - 4000K Color Temp 50K - 5000K Color Temp	EB5 -5W Emergency Integral LED Drive
Not Applicable	AC	30K	EB5

SOURCE **30K SPECS** NECEB18 L36.0 • 30K - 3000K Color Temp • 3800 LED Source Lumens • 105.5 LED Source Lumens Per Watt L37.5 • 30K - 3000K Color Temp • 4845 LED Source Lumens • 129.2 LED Source Lumens Per Watt

NOTES	PART NO	REPLACEMENT PART
Don't see the configuration you are looking for?		
Call us today at (513) 858-6004		

