

NIKE D LED 14"

Architectural Indoor



PROJECT:	
TYPE:	
PO#:	QTY:
COMMENTS:	




FEATURES

- CSA Listed Damp Location
- Die-Form Cold-Rolled Steel Housing w/ Brushed Nickel Plated Finish
- Emergency Battery Available (Except L36.0)
- LED Light Fixture
- Luminous Acrylic Diffuser
- Mounting Hardware Included
- Mounts Directly to 4" Junction Box (By Others)
- Steel Mounting Pan w/ Hi-Reflectance White Powder Coat Finish
- Steel Trim w/ Brushed Nickel Plated Finish

LINE DRAWING

LINE DRAWING NOT TO SCALE

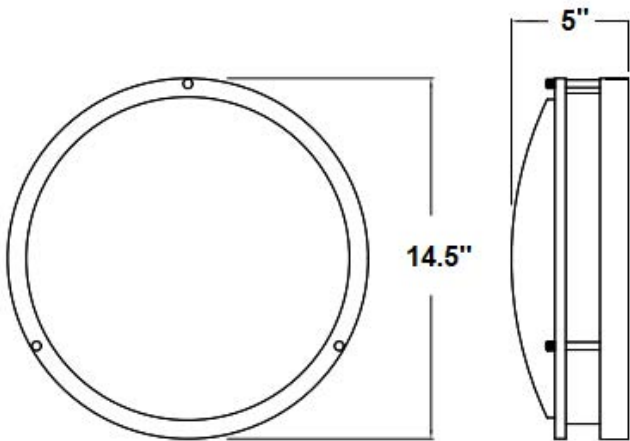

FINISHES

Antique Copper	Antique Silver	Bronze Mist	Matte Silver	Sand	Swedish Steel
Textured Black	Textured Bronze	Textured White			

For RAL Colors & Custom Match - Contact Teron Lighting Inc.

NIKE D LED 14"

Architectural Indoor



Fixture Core

PROJECT:	
TYPE:	
PO#:	QTY:
COMMENTS:	

PRODUCT CODE	SOURCE/WATTAGE	VOLTAGE	DIMMING DRIVER
NED14 - Nike D 14"	L13.5-ZE560 - (64) LED Array @ 560mA Line Voltage 4-Wire Dimming Driver (Dimmable 0 - 10V) L17.0-ZE560 - (80) LED Array @ 560mA Line Voltage 4-Wire Dimming Driver (Dimmable 0 - 10V)	120V 277V (50 / 60Hz)	Not Applicable
ORDER INFO			
NED14 Example ^	L13.5-ZE560	120V	Not Applicable

Aesthetics & Options

TRIM	FINISH	COLOR TEMP	OPTIONS
Not Applicable	AC - Antique Copper AS - Antique Silver BT - Bronze Mist BN - Brushed Nickel (Standard) SM - Matte Silver SN - Sand SW - Swedish Steel TB - Textured Black BZ - Textured Bronze TW - Textured White	30K - 3000K Color Temp 35K - 3500K Color Temp 40K - 4000K Color Temp 50K - 5000K Color Temp	EB5- 5W Emergency Integral LED Driver (EB option not available on the L36.0)
ORDER INFO			
Not Applicable Example ^	BN	30K	EB5

PROD	SOURCE	30K SPECS				
NED14	L13.5	<ul style="list-style-type: none">30K - 3000K Color Temp1700 LED Source Lumens105 LED Source Lumens Per Watt986 Delivered LED Lumens65.5 Delivered LED Lumens Per Watt				
	L17.0	<ul style="list-style-type: none">80 CRI Typ.30K - 3000K Color Temp2110 LED Source Lumens103 LED Source Lumens Per Watt1530 Delivered LED Lumens82.3 Delivered LED Lumens Per Watt				

REPLACEMENT PART	PART NO	NOTES
14" White Acrylic Diffuser	3049660	EB5 Not Available on The L36.0
		Don't see the configuration you are looking for? Call us today at (513) 858-6004



TERONLIGHTING.COM
33 DONALD DR, FAIRFIELD, OH 45014
P: 513.858.6004 F: 513.858.6038
E: SALES@TERONLIGHT.COM



We reserve the right to revise the design components of any product due to parts availability or change in UL standards, without assuming any obligation or liability to modify any products previously manufactured, and without notice.

Architectural Indoor



Aesthetics & Options

PROD	SOURCE	30K SPECS				
NED14	L20.5	<ul style="list-style-type: none">• 80 CRI Typ.• 30K - 3000K Color Temp• 2640 LED Source Lumens• 105 LED Source Lumens Per Watt• 1861 Delivered LED Lumens• 77.4 Delivered LED Lumens Per Watt				
	L24.0	<ul style="list-style-type: none">• 80 CRI Typ.• 30K - 3000K Color Temp• 3000 LED Source Lumens• 125 LED Source Lumens Per Watt				

Don't see the configuration you are looking for?
Call us today at (513) 858-6004



NIKE D LED 14"

Architectural Indoor



Fixture Core

PROJECT:	
TYPE:	
PO#:	QTY:
COMMENTS:	

PRODUCT CODE	SOURCE/WATTAGE	VOLTAGE	DIMMING DRIVER
NED14 - Nike D 14"	L36.0-ZE1100 - (120) LED Array @ 1100mA Line Voltage 4-Wire Dimming Driver (Dimmable 0 - 10V)	120V 277V (50 / 60Hz)	0-10V Dimming
ORDER INFO			
NED14 Example ^	L36.0-ZE1100	120V	Not Applicable

Aesthetics & Options

TRIM	FINISH	COLOR TEMP	OPTIONS
Not Applicable	AC - Antique Copper AS - Antique Silver BT - Bronze Mist BN - Brushed Nickel (Standard) SM - Matte Silver SN - Sand SW - Swedish Steel TB - Textured Black BZ - Textured Bronze TW - Textured White	30K - 3000K Color Temp 35K - 3500K Color Temp 40K - 4000K Color Temp 50K - 5000K Color Temp	Not Applicable
ORDER INFO			
Not Applicable Example ^	BN	30K	Not Applicable

PROD	SOURCE	30K SPECS				
NED14	L36.0	<ul style="list-style-type: none">80 CRI Typ.30K - 3000K Color Temp3800 LED Source Lumens105 LED Source Lumens Per Watt				

REPLACEMENT PART	PART NO	NOTES
14" White Acrylic Diffuser	3049660	EB5 Not Available on The L36.0
		Don't see the configuration you are looking for? Call us today at (513) 858-6004



TERONLIGHTING.COM
33 DONALD DR, FAIRFIELD, OH 45014
P: 513.858.6004 F: 513.858.6038
E: SALES@TERONLIGHT.COM



We reserve the right to revise the design components of any product due to parts availability or change in UL standards, without assuming any obligation or liability to modify any products previously manufactured, and without notice.