

# NIKE D LED 18"

Architectural Indoor



PROJECT:	
TYPE:	
PO#:	QTY:
COMMENTS:	


## FEATURES

- CSA Listed Damp Location
- Die-Form Cold-Rolled Steel Housing w/ Brushed Nickel Plated Finish
- Emergency Battery Available
- LED Light Fixture
- Luminous White Acrylic Diffuser
- Mounting Hardware Included
- Mounts Directly to 4" Junction Box (By Others)
- Steel Mounting Pan w/ Hi-Reflectance White Powder Coat Finish
- Steel Trim w/ Brushed Nickel Plated Finish



## LINE DRAWING

LINE DRAWING NOT TO SCALE

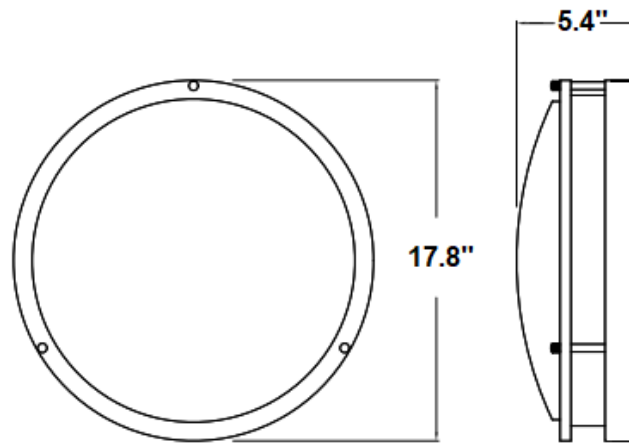

## FINISHES


Antique Copper




Antique Silver




Bronze Mist




Matte Silver




Sand




Swedish Steel




Textured Black



Textured Bronze



Textured White



For RAL Colors & Custom Match - Contact Teron Lighting Inc.

# NIKE D LED 18"

Architectural Indoor



Fixture Core

PROJECT:	
TYPE:	
PO#:	QTY:
COMMENTS:	

PRODUCT CODE	SOURCE/WATTAGE	VOLTAGE	DIMMING DRIVER
<b>NED18</b> - Nike D 18"	<b>L21.0-ZE700</b> - (80) LED Array @ 700mA Line Voltage 4-Wire Dimming Driver (Dimmable 0 - 10V) <b>L24.0-ZE750</b> - (120) LED Array @ 750mA Line Voltage 4-Wire Dimming Driver (Dimmable 0 - 10V)	<b>120V</b> <b>277V</b> (50 / 60Hz)	<b>0-10V Dimming</b>
ORDER INFO			
NED18 Example ^	L21.0-ZE700	120V	Not Applicable

Aesthetics & Options

TRIM	FINISH	COLOR TEMP	OPTIONS
<b>Not Applicable</b>	<b>AC</b> - Antique Copper <b>TB</b> - Textured Black <b>AS</b> - Antique Silver <b>BT</b> - Bronze Mist <b>BZ</b> - Textured Bronze <b>BN</b> - Brushed Nickel (Standard) <b>TW</b> - Textured White <b>SM</b> - Matte Silver <b>SN</b> - Sand <b>SW</b> - Swedish Steel	<b>30K</b> - 3000K Color Temp <b>35K</b> - 3500K Color Temp <b>40K</b> - 4000K Color Temp <b>50K</b> - 5000K Color Temp	<b>EB5</b> - 5W Emergency Integral LED Driver
ORDER INFO			
Not Applicable Example ^	BN	30K	EB5

PROD	SOURCE	30K SPECS			
<b>NED18</b>	L21.0	<ul style="list-style-type: none"> <li>30K - 3000K Color Temp</li> <li>2640 LED Source Lumens</li> <li>105 LED Source Lumens Per Watt</li> <li>1861 Delivered LED Lumens</li> <li>77.4 Delivered LED Lumens Per Watt</li> </ul>			
	L24.0	<ul style="list-style-type: none"> <li>30K - 3000K Color Temp</li> <li>3000 LED Source Lumens</li> <li>125 LED Source Lumens Per Watt</li> </ul>			

REPLACEMENT PART	PART NO	NOTES
18" White Acrylic Diffuser	3049760	

Don't see the configuration you are looking for?  
Call us today at (513) 858-6004



TERONLIGHTING.COM  
 33 DONALD DR, FAIRFIELD, OH 45014  
 P: 513.858.6004 F: 513.858.6038  
 E: SALES@TERONLIGHT.COM



We reserve the right to revise the design components of any product due to parts availability or change in UL standards, without assuming any obligation or liability to modify any products previously manufactured, and without notice.

# NIKE D LED 18"

Architectural Indoor



Fixture Core

PROJECT:	
TYPE:	
PO#:	QTY:
COMMENTS:	

PRODUCT CODE	SOURCE/WATTAGE	VOLTAGE	DIMMING DRIVER
<b>NED18</b> - Nike D 18"	<b>L30.0-ZE1000</b> - (80) LED Array @ 1000mA Line Voltage 4-Wire Dimming Driver (Dimmable 0 - 10V) <b>L36.0-ZE1000</b> - (120) LED Array @ 1000mA Line Voltage 4-Wire Dimming Driver (Dimmable 0 - 10V)	<b>120V</b> <b>277V</b> (50 / 60Hz)	<b>0-10V Dimming</b>
ORDER INFO			
NED18 Example ^	L30.0-ZE1000	120V	Not Applicable

Aesthetics & Options

TRIM	FINISH	COLOR TEMP	OPTIONS
<b>Not Applicable</b>	<b>AC</b> - Antique Copper <b>TB</b> - Textured Black <b>AS</b> - Antique Silver <b>BT</b> - Bronze Mist <b>BZ</b> - Textured Bronze <b>BN</b> - Brushed Nickel (Standard) <b>TW</b> - Textured White <b>SM</b> - Matte Silver <b>SN</b> - Sand <b>SW</b> - Swedish Steel	<b>30K</b> - 3000K Color Temp <b>35K</b> - 3500K Color Temp <b>40K</b> - 4000K Color Temp <b>50K</b> - 5000K Color Temp	<b>EB5</b> - 5W Emergency Integral LED Driver
ORDER INFO			
Not Applicable Example ^	BN	30K	EB5

PROD	SOURCE	30K SPECS			
<b>NED18</b>	L30.0	<ul style="list-style-type: none"> <li>30K - 3000K Color Temp</li> <li>4907 LED Source Lumens</li> <li>163.5 LED Source Lumens Per Watt</li> </ul>			
	L36.0	<ul style="list-style-type: none"> <li>30K - 3000K Color Temp</li> <li>3800 LED Source Lumens</li> <li>105.5 LED Source Lumens Per Watt</li> </ul>			

REPLACEMENT PART	PART NO	NOTES
18" White Acrylic Diffuser	3049760	
		Don't see the configuration you are looking for? Call us today at (513) 858-6004



**TERONLIGHTING.COM**  
 33 DONALD DR, FAIRFIELD, OH 45014  
 P: 513.858.6004 F: 513.858.6038  
 E: SALES@TERONLIGHT.COM



We reserve the right to revise the design components of any product due to parts availability or change in UL standards, without assuming any obligation or liability to modify any products previously manufactured, and without notice.

# NIKE D LED 18"

Architectural Indoor



Fixture Core

PROJECT:	
TYPE:	
PO#:	QTY:
COMMENTS:	

PRODUCT CODE	SOURCE/WATTAGE	VOLTAGE	DIMMING DRIVER
NED18 - Nike D 18"	L37.5-ZE1100 - (120) LED Array @ 1100mA Line Voltage 4-Wire Dimming Driver (Dimmable 0 - 10V)	120V 277V (50 / 60Hz)	0-10V Dimming
ORDER INFO			
NED18 Example ^	L37.5-ZE1100	120V	Not Applicable

Aesthetics & Options

TRIM	FINISH	COLOR TEMP	OPTIONS
Not Applicable	<b>AC</b> - Antique Copper <b>AS</b> - Antique Silver <b>BT</b> - Bronze Mist <b>BN</b> - Brushed Nickel (Standard) <b>SM</b> - Matte Silver <b>SN</b> - Sand <b>SW</b> - Swedish Steel <b>TB</b> - Textured Black <b>BZ</b> - Textured Bronze <b>TW</b> - Textured White	<b>30K</b> - 3000K Color Temp <b>35K</b> - 3500K Color Temp <b>40K</b> - 4000K Color Temp <b>50K</b> - 5000K Color Temp	<b>EB5</b> - 5W Emergency Integral LED Driver
ORDER INFO			
Not Applicable Example ^	BN	30K	EB5

PROD	SOURCE	30K SPECS			
NED18	L37.5	<ul style="list-style-type: none"> <li>30K - 3000K Color Temp</li> <li>4845 LED Source Lumens</li> <li>121.2 LED Source Lumens Per Watt</li> </ul>			

REPLACEMENT PART	PART NO	NOTES
18" White Acrylic Diffuser	3049760	
		Don't see the configuration you are looking for? Call us today at (513) 858-6004



**TERONLIGHTING.COM**  
 33 DONALD DR, FAIRFIELD, OH 45014  
 P: 513.858.6004 F: 513.858.6038  
 E: SALES@TERONLIGHT.COM



We reserve the right to revise the design components of any product due to parts availability or change in UL standards, without assuming any obligation or liability to modify any products previously manufactured, and without notice.