## VICEROY W LED 48"

Architectural Outdoor

٤	(SP	









- ADA Compliant
- Aluminum Fixture w/ Matte Silver Powder Coat Finish

PROJECT: TYPE: PO#:


COMMENTS:


- Aluminum Mounting Plate Mounts to Wall Surface (Centered Over Conduit)
- CSA Listed Wet Location For Wall Mount
- Dimmable @ 120-277V
- Estimated Lumen Depreciation (TM-21) 70% of Initial Lumens (L70) @ 90,000 Hours

QTY:

- Integral Surge Protector
- Leading or Trailing edge or 0-10V Dimming Avaiable
- LED Light Fixture
- Requires a 1/2" Watertight Conduit Connector (Not Included)
- · White Acrylic Lens
- 0-10V Dimming

## LINE DRAWING 3" 12 1/8" 23 1/8" 35 1/8" 47 1/8" 3" **FINISHES**

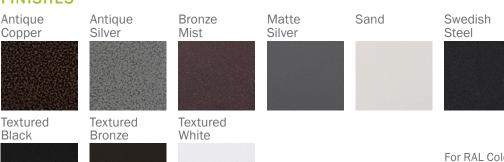







## VICEROY W LED 48"

Architectural Outdoor



PO#: COMMENTS: QTY:

PROJECT: TYPE:

Fixture Core

TIXCUIC OUIC				
PRODUCT CODE	SOURCE/WATTAGE	VOLTAGE	DIMMING DRIVER	
VCYW48 - Viceroy W 48"  L28.0-ZE875 - 28W LED Strip(s) @ 875mA Line Voltage 4-Wire Dimming Driver (Dimmable 0 - 10V)  L36.0-ZE1100 - 36W LED Strip(s) @ 1100mA Line Voltage 4-Wire Dimming Driver (Dimmable 0 - 10V)			0-10V Dimming	
ORDER INFO				
VCYW48	L28.0-ZE875	120-277V	Not Applicable	
Example ^				

Aesthetics & Options

TRIM	FINISH	COLOR TEMP	OPTIONS
Not Applicable	AC - Antique Copper AS - Antique Silver BT - Bronze Mist BZ - Textured Bronze SM - Matte Silver (Standard) SN - Sand	35K - 3500K Color Temp 40K - 4000K Color Temp	Not Applicable
ORDER INFO			
Not Applicable	SM	30K	Not Applicable

PROD	SOURCE	30K SPECS
VCYW48	L28.0	• 30K - 3000K Color Temp • 4379 LED Source Lumens • 156LED Source Lumens Per Watt
	L36.0	• 30K - 3000K Color Temp • 4154 LED Delivered Lumens • 115.3 LED Delivered Lumens Per Watt

REPLACEMENT PART	PART NO	NOTES
4' Lens Assembly	3059160	
		Don't see the configuration you are looking for? Call us today at (513) 858-6004

