

# EAGLE MSI LED 14"

Architectural Outdoor




PROJECT:	
TYPE:	
PO#:	QTY:
COMMENTS:	

## FEATURES

- ADA Compliant
- CSA Listed Damp Location Wall and Ceiling
- Fixture Turns Off When There is Zero Occupancy
- [Internal Motion Sensor](#)
- LED Light Fixture
- Luminous White Acrylic Diffuser
- Mounting Hardware Included
- Mounts Directly to 4" Junction Box (By Others)
- Steel Mounting Pan w/ Hi-Reflectance White Powder Coat Finish

## LINE DRAWING

LINE DRAWING NOT TO SCALE

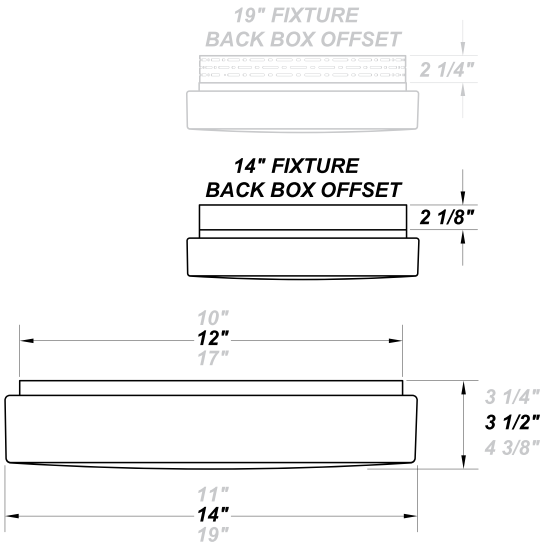

## FINISHES

Antique Copper	Antique Silver	Bronze Mist	Gloss White	Matte Silver	Sand
Swedish Steel	Textured Black	Textured Bronze	Textured White		

For RAL Colors & Custom Match - Contact Teron Lighting Inc.

# EAGLE MSI LED 14"

Architectural Outdoor



Fixture Core

PROJECT:	
TYPE:	
PO#:	QTY:
COMMENTS:	

PRODUCT CODE	SOURCE/WATTAGE	VOLTAGE	DIMMING DRIVER
EE14- Eagle 14"	L19.0-ZE560 - (80) LED Array @ Line Voltage 4-Wire Dimming Driver (Dimmable 0 - 10V) L24.0-ZE700 - (80) LED Array @ Line Voltage 4-Wire Dimming Driver (Dimmable 0 - 10V)	120-277V (50 / 60Hz)	(0-10V Dimming Driver)
ORDER INFO			
EE14	L19.0-ZE560	120-277V	Not Applicable

Example ^ (may not represent a manufacturable product)

Aesthetics & Options

TRIM	FINISH	COLOR TEMP	OPTIONS
MSI-Internal Motion Sensor	AC - Antique Copper AS - Antique Silver BT - Bronze Mist WH - Gloss White (Standard) SM - Matte Silver SN - Sand SW - Swedish Steel TB - Textured Black BZ - Textured Bronze TW - Textured White	30K - 3000K Color Temp 35K - 3500K Color Temp 40K - 4000K Color Temp 50K - 5000K Color Temp	BB - Back Box*** EB/BB - Keystone KT-EMRG-LED-5-500 - Up to 5W Emergency Illumination w/ LEDs (Back Box Required)** STC12-WH - 12" Stem and Canopy Kit STC24-WH - 24" Stem and Canopy Kit STC36-WH - 36" Stem and Canopy Kit STC48-WH - 48" Stem and Canopy Kit TP - Tamper-Proof Screw Set WAL - White Acrylic (Standard) WLL - LED High Lumen Lens WPL - White Polycarbonate
ORDER INFO			
MSI	WH	30K	BB

Example ^ (may not represent a manufacturable product)

PROD	SOURCE	30K SPECS				
EE14	L19.0	<ul style="list-style-type: none"><li>80 CRI Typ.</li><li>30K - 3000K Color Temp</li><li>2721 LED Source Lumens</li><li>143.2 LED Source Lumens Per Watt</li></ul>				
	L24.0	<ul style="list-style-type: none"><li>80 CRI Typ.</li><li>30K - 3000K Color Temp</li><li>3401 LED Source Lumens</li><li>141.7 LED Source Lumens Per Watt</li></ul>				

REPLACEMENT PART	PART NO	NOTES
14" White Acrylic Diffuser	3011560	**AC Mode 716 Lumens
14" White Acrylic LED Diffuser	3053160	Battery @ 1 second = 716 Total Lumens Battery @ 90 Minutes = 644 Total Lumens
		***Not CSA Damp Location Listed for Wall Mount  Don't see the configuration you are looking for? Call us today at (513) 858-6004



TERONLIGHTING.COM  
33 DONALD DR, FAIRFIELD, OH 45014  
P: 513.858.6004 F: 513.858.6038  
E: SALES@TERONLIGHT.COM



We reserve the right to revise the design components of any product due to parts availability or change in UL standards, without assuming any obligation or liability to modify any products previously manufactured, and without notice.

# EAGLE MSI LED 14"

Architectural Outdoor



Fixture Core

PROJECT:	
TYPE:	
PO#:	QTY:
COMMENTS:	

PRODUCT CODE	SOURCE/WATTAGE	VOLTAGE	DIMMING DRIVER
EE14- Eagle 14"	L35.0-ZE1000 - (80) LED Array @ Line Voltage 4-Wire Dimming Driver (Dimmable 0 - 10V)	120-277V (50 / 60Hz)	(0-10V Dimming Driver)
ORDER INFO			
EE14	L35.0-ZE1000	120-277V	Not Applicable

Example ^ (may not represent a manufacturable product)

Aesthetics & Options

TRIM	FINISH	COLOR TEMP	OPTIONS
MSI-Internal Motion Sensor	AC - Antique Copper AS - Antique Silver BT - Bronze Mist WH - Gloss White (Standard) SM - Matte Silver SN - Sand SW - Swedish Steel TB - Textured Black BZ - Textured Bronze TW - Textured White	30K - 3000K Color Temp 35K - 3500K Color Temp 40K - 4000K Color Temp 50K - 5000K Color Temp	BB - Back Box*** EB/BB - Keystone KT-EMRG-LED-5-500 - Up to 5W Emergency Illumination w/ LEDs (Back Box Required)** STC12-WH - 12" Stem and Canopy Kit STC24-WH - 24" Stem and Canopy Kit STC36-WH - 36" Stem and Canopy Kit STC48-WH - 48" Stem and Canopy Kit TP - Tamper-Proof Screw Set WAL - White Acrylic (Standard) WLL - LED High Lumen Lens WPL - White Polycarbonate
ORDER INFO			
MSI	WH	30K	BB

Example ^ (may not represent a manufacturable product)

PROD	SOURCE	30K SPECS				
EE14	L35.0	<ul style="list-style-type: none"><li>80 CRI Typ.</li><li>30K - 3000K Color Temp</li><li>4859 LED Source Lumens</li><li>138.8 LED Source Lumens Per Watt</li></ul>				

REPLACEMENT PART	PART NO	NOTES
14" White Acrylic Diffuser	3011560	**AC Mode 716 Lumens Battery @ 1 second = 716 Total Lumens Battery @ 90 Minutes = 644 Total Lumens
14" White Acrylic LED Diffuser	3053160	
		***Not CSA Damp Location Listed for Wall Mount  Don't see the configuration you are looking for? Call us today at (513) 858-6004



TERONLIGHTING.COM  
33 DONALD DR, FAIRFIELD, OH 45014  
P: 513.858.6004 F: 513.858.6038  
E: SALES@TERONLIGHT.COM



We reserve the right to revise the design components of any product due to parts availability or change in UL standards, without assuming any obligation or liability to modify any products previously manufactured, and without notice.