


BRISTOL LED

Architectural Indoor



PROJECT:	
TYPE:	
PO#:	QTY:
COMMENTS:	

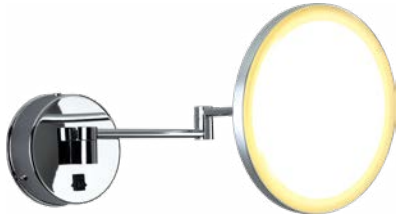


FEATURES

- Aluminum and Steel Construction
- CRI ≥ 90
- ETL Listed For Dry Locations
- Front On/Off Switch
- Glass Lamp Shade
- LED Light Fixture
- Non-Dimming
- Retractable
- Wall Mounted
- 3 X Magnification
- ~50,000 Hour Rated LED Life

LINE DRAWING

LINE DRAWING NOT TO SCALE

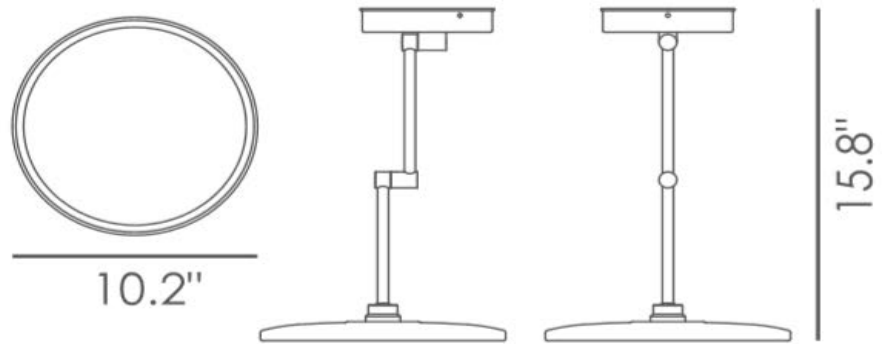

FINISHES

Chrome

Brushed Aluminum



BRISTOL LED

Architectural Indoor



Fixture Core

PROJECT:	
TYPE:	
PO#:	QTY:
COMMENTS:	

PRODUCT CODE	SOURCE/WATTAGE	VOLTAGE	DIMMING DRIVER
BRST - Bristol LED	L8.5-LT500 - 8.5W @ 500mA Constant Current Electronic Driver (Non-Dimmable)	120V -240V	Not Applicable
ORDER INFO			
BRST	L8.5-LT500	120V-240V	Not Applicable

Aesthetics & Options

TRIM	FINISH	COLOR TEMP	OPTIONS
Not Applicable	CM - Chrome AL - Brushed Aluminum	30K - 3000K Color Temp	Not Applicable
ORDER INFO			
Not Applicable	CM, AL	30K	Not Applicable

PROD	SOURCE	30K SPECS				
BRST	L8.5	<ul style="list-style-type: none"> • 30K - 3000K Color Temp • 790 LED Source Lumens • 92.9 LED Source Lumens Per Watt • 341 Delivered LED Lumens • 40.1 Delivered LED Lumens Per Watt 				

NOTES

Don't see the configuration you are looking for?
Call us today at (513) 858-6004



TERONLIGHTING.COM
33 DONALD DR, FAIRFIELD, OH 45014
P: 513.858.6004 F: 513.858.6038
E: SALES@TERONLIGHT.COM

We reserve the right to revise the design components of any product due to parts availability or change in UL standards, without assuming any obligation or liability to modify any products previously manufactured, and without notice.