

EAGLE MSI LED 11"

Architectural Outdoor



PROJECT:	
TYPE:	
PO#:	QTY:
COMMENTS:	


FEATURES

- Steel Mounting Pan w/ Hi-Reflectance White Powder Coat Finish
- Luminous White Acrylic Diffuser
- Mounts Directly to 4" Junction Box (By Others)
- IES Files Available
- ADA Compliant
- CSA Listed Damp Location Wall and Ceiling
- LED Light Fixture
- Mounting Hardware Included




LINE DRAWING

LINE DRAWING NOT TO SCALE

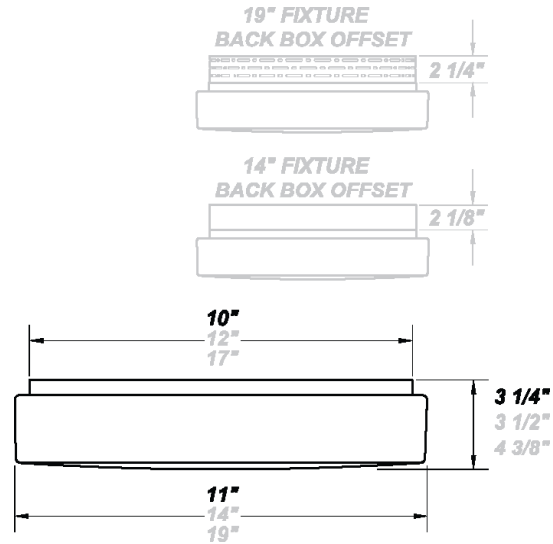

FINISHES

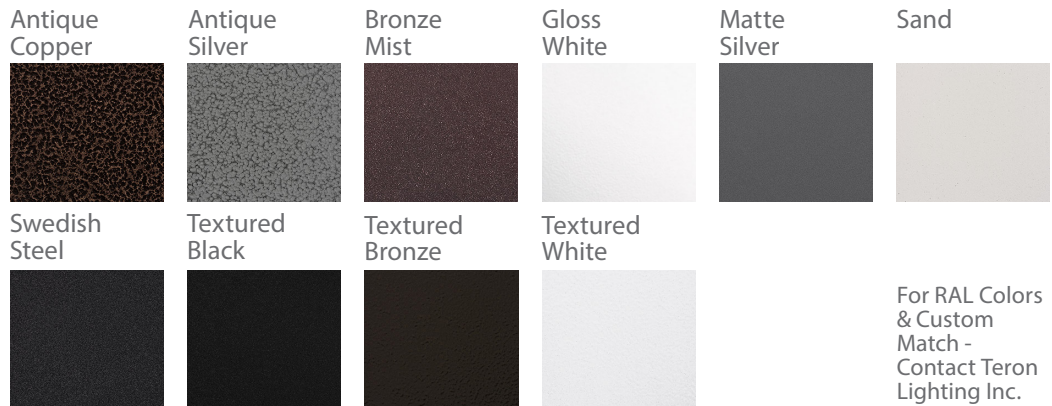

EAGLE MSI LED 11"

Architectural Outdoor



Fixture Core

PROJECT:	
TYPE:	
PO#:	QTY:
COMMENTS:	

PRODUCT CODE	SOURCE/WATTAGE	VOLTAGE	DIMMING DRIVER
EE - Eagle	L13.0-ZE560 - (48) LED Array @ Line Voltage 4-Wire Dimming Driver (Dimmable 0 - 10V)	120V 270V (50 / 60Hz)	SDxx - Bi-Level Step Dimming from 10-90% in increments of 10% (replace xx in ordering code with requested dimming percentage)*
ORDER INFO			

EE	L13.0-ZE560	120V	SD50
Example ^ (may not represent a manufacturable product)			

Aesthetics & Options

TRIM	FINISH	COLOR TEMP	OPTIONS
Not Applicable	AC - Antique Copper AS - Antique Silver BT - Bronze Mist WH - Gloss White (Standard) SM - Matte Silver SN - Sand SW - Swedish Steel TB - Textured Black BZ - Textured Bronze TW - Textured White	30K - 3000K Color Temp 35K - 3500K Color Temp 40K - 4000K Color Temp	ALP - Aluminum Mount Pan w/ White Finish STC12-WH - 12" Stem and Canopy Kit STC24-WH - 24" Stem and Canopy Kit STC36-WH - 36" Stem and Canopy Kit STC48-WH - 48" Stem and Canopy Kit TP - Tamper-Proof Screw Set WAL - White Acrylic (Standard) WLL - LED High Lumen Lens WPL - White Polycarbonate SPD - Surge Protection Device
ORDER INFO			

Not Applicable	AC	30K	ALP
Example ^ (may not represent a manufacturable product)			

PROD	SOURCE	30K SPECS	30K SPECS			
EE 11"	L13.0	<ul style="list-style-type: none"> • WAL Lens • 80 CRI Typ. • 30K - 3000K Color Temp • 1700 LED Source Lumens • 105 LED Source Lumens Per Watt • 1071 Delivered LED Lumens • 71.6 Delivered LED Lumens Per Watt 	<ul style="list-style-type: none"> • WLL Lens • 80 CRI Typ. • 30K - 3000K Color Temp • 1700 LED Source Lumens • 105 LED Source Lumens Per Watt • 1562 Delivered LED Lumens • 104.4 Delivered LED Lumens Per Watt 			

REPLACEMENT PART	PART NO	NOTES
11" White Acrylic Diffuser	3011360	Bi-Level Step Dimming is not required, if no SDxx is provided on P.O. then the fixture will still Turn ON/OFF with the sensor.
11" White Acrylic LED Diffuser	3053060	
		Don't see the configuration you are looking for? Call us today at (513) 858-6004



TERONLIGHTING.COM
 33 DONALD DR, FAIRFIELD, OH 45014
 P: 513.858.6004 F: 513.858.6038
 E: SALES@TERONLIGHT.COM



We reserve the right to revise the design components of any product due to parts availability or change in UL standards, without assuming any obligation or liability to modify any products previously manufactured, and without notice.