

# EAGLE MSI LED 14"

Architectural Outdoor



PROJECT:	
TYPE:	
PO#:	QTY:
COMMENTS:	


## FEATURES

- ADA Compliant
- CSA Listed Damp Location Wall and Ceiling
- Emergency Battery Available Available
- IES Files Available
- LED Light Fixture
- Luminous White Acrylic Diffuser
- Mounts Directly to 4" Junction Box (By Others)
- Mounting Hardware Included
- Steel Mounting Pan w/ Hi-Reflectance White Powder Coat Finish




## LINE DRAWING

LINE DRAWING NOT TO SCALE

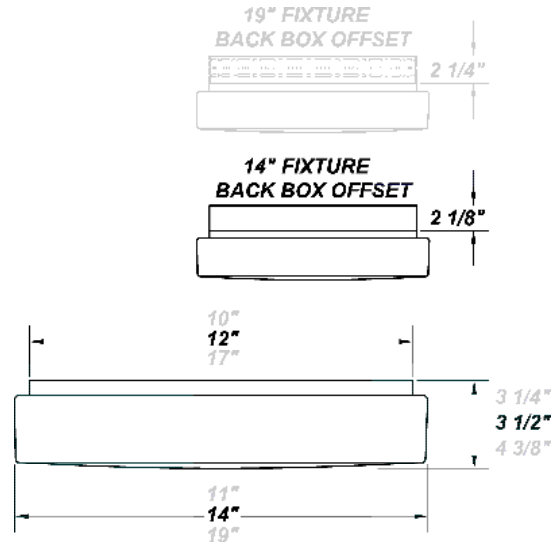

## FINISHES

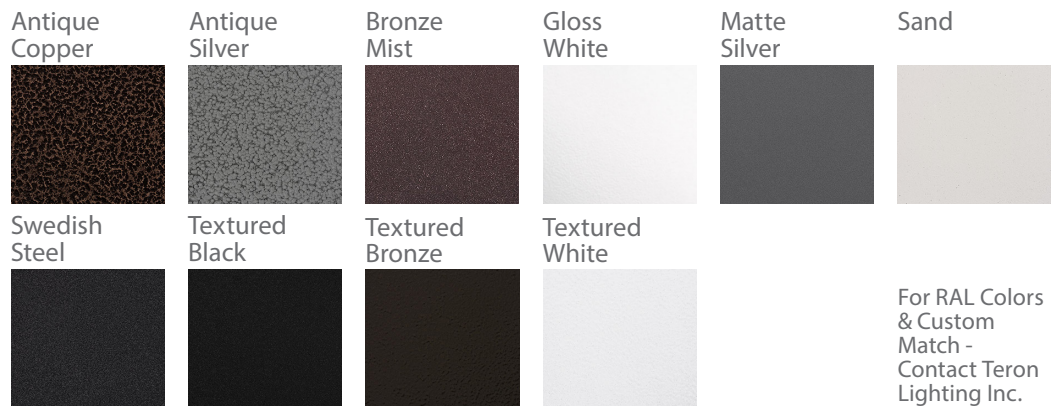

# EAGLE MSI LED 14"

Architectural Outdoor



Fixture Core

PROJECT:	
TYPE:	
PO#:	QTY:
COMMENTS:	

PRODUCT CODE	SOURCE/WATTAGE	VOLTAGE	DIMMING DRIVER
EE - Eagle	L16.3-ZE560 - (60) LED Array @ Line Voltage 4-Wire Dimming Driver (Dimmable 0 - 10V) L21.0-ZE700 - (60) LED Array @ Line Voltage 4-Wire Dimming Driver (Dimmable 0 - 10V)	120V 277V (50 / 60Hz)	SDxx - Bi-Level Step Dimming from 10-90% in increments of 10% (replace xx in ordering code with requested dimming percentage)
ORDER INFO			

EE	L16.3-ZE560	120V	SDXX
Example ^ (may not represent a manufacturable product)			

Aesthetics & Options

TRIM	FINISH	COLOR TEMP	OPTIONS	
MSI	AC - Antique Copper AS - Antique Silver BT - Bronze Mist WH - Gloss White (Standard) SM - Matte Silver SN - Sand SW - Swedish Steel	TB - Textured Black BZ - Textured Bronze TW - Textured White	30K - 3000K Color Temp 35K - 3500K Color Temp 40K - 4000K Color Temp 50K - 5000K Color Temp	ALP - Aluminum Mount Pan w/ White Finish BB - Back Box*** EB/BB - Bodine BSL26 - Up to 5.1W Emergency Illumination w/ LEDs (Back Box Required)** F - Fused STC12-WH - 12" Stem and Canopy Kit STC24-WH - 24" Stem and Canopy Kit STC36-WH - 36" Stem and Canopy Kit STC48-WH - 48" Stem and Canopy Kit TP - Tamper-Proof Screw Set WAL - White Acrylic (Standard) WLL - LED High Lumen Lens WPL - White Polycarbonate SPD - Surge Protection Device
ORDER INFO				

Not Applicable	WH	30K	ALP
Example ^ (may not represent a manufacturable product)			

PROD	SOURCE	30K SPECS	30K SPECS	
EE 14"	L16.3	<ul style="list-style-type: none"> <li>WAL Lens</li> <li>80 CRI Typ.</li> <li>30K - 3000K Color Temp</li> <li>2110 LED Source Lumens</li> <li>103 LED Source Lumens Per Watt</li> <li>1364 Delivered LED Lumens</li> <li>73.2 Delivered LED Lumens Per Watt</li> </ul>	<ul style="list-style-type: none"> <li>WLL Lens</li> <li>80 CRI Typ.</li> <li>30K - 3000K Color Temp</li> <li>2110 LED Source Lumens</li> <li>103 LED Source Lumens Per Watt</li> <li>2065 Delivered LED Lumens</li> <li>110.7 Delivered LED Lumens Per Watt</li> </ul>	<p>Note: If just on/off Operation is desired do not order eagle with SDxx. SDxx is reserved for Step Dimming to a set value and then returning to 100% light output when motion is detected.</p>
	L21.0	<ul style="list-style-type: none"> <li>WAL Lens</li> <li>80 CRI Typ.</li> <li>30K - 3000K Color Temp</li> <li>2640 LED Source Lumens</li> <li>105 LED Source Lumens Per Watt</li> <li>1643 Delivered LED Lumens</li> <li>68.2 Delivered LED Lumens Per Watt</li> </ul>	<ul style="list-style-type: none"> <li>WLL Lens</li> <li>80 CRI Typ.</li> <li>30K - 3000K Color Temp</li> <li>2640 LED Source Lumens</li> <li>105 LED Source Lumens Per Watt</li> <li>2478 Delivered LED Lumens</li> <li>102.8 Delivered LED Lumens Per Watt</li> </ul>	

REPLACEMENT PART	PART NO	NOTES
14" White Acrylic Diffuser	3011560	**AC Mode 960 Lumens Battery @ 1 second = 322 Total Lumens Battery @ 90 Minutes = 291 Total Lumens (Please Specify Voltage)
14" White Acrylic LED Diffuser	3053160	
		***Not CSA Damp Location Listed for Wall Mount  Don't see the configuration you are looking for? Call us today at (513) 858-6004



TERONLIGHTING.COM  
 33 DONALD DR, FAIRFIELD, OH 45014  
 P: 513.858.6004 F: 513.858.6038  
 E: SALES@TERONLIGHT.COM



We reserve the right to revise the design components of any product due to parts availability or change in UL standards, without assuming any obligation or liability to modify any products previously manufactured, and without notice.