

FIRENZA MEDIUM LED

Architectural Indoor



PROJECT:	
TYPE:	
PO#:	QTY:
COMMENTS:	




FEATURES

- Adjustable Hard Stem (See Stem Details on LINE DRAWING)
- Aluminum Construction
- Ceiling Mounted
- CRI ≥ 90
- Dimmable @ 120V (100% - 10%)
- Dimming Driver Contained In Canopy
- ETL Listed For Dry Locations
- LED Light Fixture
- Polystyrene Diffuser Lamp Shade
- 120V Only
- ~50,000 Hour Rated LED Life


LINE DRAWING

LINE DRAWING NOT TO SCALE

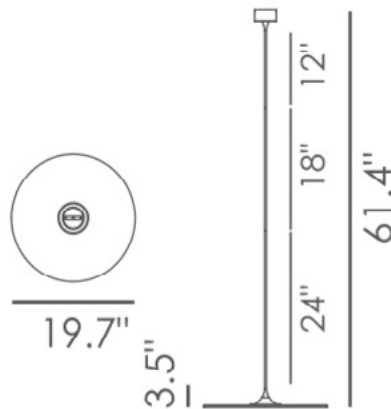

FINISHES

Deep Taupe



FIRENZA MEDIUM LED

Architectural Indoor



Fixture Core

PROJECT:	
TYPE:	
PO#:	QTY:
COMMENTS:	

PRODUCT CODE	SOURCE/WATTAGE	VOLTAGE	DIMMING DRIVER
FZM - Firenza Medium LED	L28.0-LT900 - 28W @ 900mA ELV Low Voltage 2-Wire Dimming Electronic Driver (Leading or Trailing Edge)	120V	ELV or TRIAC Dimming @ 120V
ORDER INFO			
FZM	L28.0-LT900	120V	ELV, TRIAC

Example ^

Aesthetics & Options

TRIM	FINISH	COLOR TEMP	OPTIONS
Not Applicable	DT - Deep Taupe	30K - 3000K Color Temp	Not Applicable
ORDER INFO			
Not Applicable	DT	30K	Not Applicable

Example ^

PROD	SOURCE	30K SPECS				
FZM	L28.0	<ul style="list-style-type: none"> 30K - 3000K Color Temp 2430 LED Source Lumens 86.8 LED Source Lumens Per Watt 1188 Delivered LED Lumens 41 Delivered LED Lumens Per Watt 				

NOTES

Don't see the configuration you are looking for?
Call us today at (513) 858-6004



TERONLIGHTING.COM
33 DONALD DR, FAIRFIELD, OH 45014
P: 513.858.6004 F: 513.858.6038
E: SALES@TERONLIGHT.COM

We reserve the right to revise the design components of any product due to parts availability or change in UL standards, without assuming any obligation or liability to modify any products previously manufactured, and without notice.