

MONZA DOUBLE SQUARE LED

Architectural Indoor



PROJECT:

TYPE:

PO#:

QTY:


COMMENTS:

FEATURES

- Acrylic Lens
- Adjustable Cable
- Aluminum Construction
- Ceiling Mounted
- CRI \geq 90
- Dimmable @ 120V (100% - 10%)
- Dimming Driver Contained In Canopy
- ETL Listed For Dry Locations
- LED Light Fixture
- 120V Only
- 2" Recommended Minimum Cable Length; 59" Maximum Fixture Length
- 2 Total Lights
- ~50,000 Hour Rated LED Life

LINE DRAWING

LINE DRAWING NOT TO SCALE

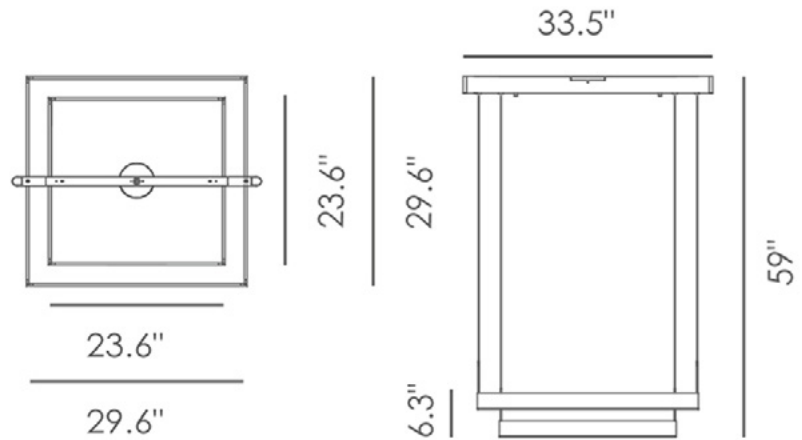

FINISHES

Deep Taupe Brushed Gold



MONZA DOUBLE SQUARE LED

Architectural Indoor



Fixture Core

PROJECT:	
TYPE:	
PO#:	QTY:
COMMENTS:	

PRODUCT CODE	SOURCE/WATTAGE	VOLTAGE	DIMMING DRIVER
MZDS - Monza Double Square LED	L73.0-LT2100 - 73W @ 2100mA ELV Low Voltage 2-Wire Dimming Electronic Driver (Leading or Trailing Edge)	120V	ELV or TRIAC Dimming @ 120V
ORDER INFO			
MZDS	L73.0-LT2100	120V	ELV, TRIAC

Example ^

Aesthetics & Options

TRIM	FINISH	COLOR TEMP	OPTIONS
Not Applicable	DT - Deep Taupe BG - Brushed Gold	30K - 3000K Color Temp	Not Applicable
ORDER INFO			
Not Applicable	DT, BG	30K	Not Applicable

Example ^

PROD	SOURCE	30K SPECS				
MZDS	L73.0	<ul style="list-style-type: none"> • 30K - 3000K Color Temp • 5640 LED Source Lumens • 77.3 LED Source Lumens Per Watt • 2568 Delivered LED Lumens • 35.2 Delivered LED Lumens Per Watt 				

NOTES

Don't see the configuration you are looking for?
Call us today at (513) 858-6004



TERONLIGHTING.COM
33 DONALD DR, FAIRFIELD, OH 45014
P: 513.858.6004 F: 513.858.6038
E: SALES@TERONLIGHT.COM

We reserve the right to revise the design components of any product due to parts availability or change in UL standards, without assuming any obligation or liability to modify any products previously manufactured, and without notice.