


PESEO SMALL LED

Architectural Indoor

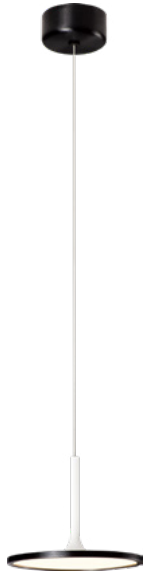


PROJECT:	
TYPE:	
PO#:	QTY:
COMMENTS:	

FEATURES

- Adjustable Cable
- Aluminum Construction
- Ceiling Mounted
- CRI \geq 90
- Dimmable @ 120V (100% - 10%)
- Dimming Driver Contained In Canopy
- Dual Finish - Matte White with Brushed Black Trim
- ETL Listed For Dry Locations
- LED Light Fixture
- Polystyrene Diffuser Lamp Shade
- 120V Only
- 2" Recommended Minimum Cable Length; Max Fixture Length 128.7"
- ~50,000 Hour Rated LED Life

LINE DRAWING


LINE DRAWING NOT TO SCALE

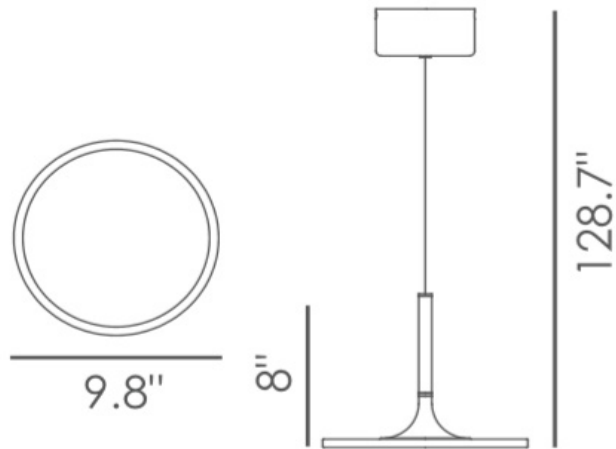

FINISHES

Brushed
Black

Matte White



PESEO SMALL LED

Architectural Indoor



Fixture Core

PROJECT:	
TYPE:	
PO#:	QTY:
COMMENTS:	

PRODUCT CODE	SOURCE/WATTAGE	VOLTAGE	DIMMING DRIVER
PESS - Peseo Small LED	L15.0-LT700 - 15W @ 700mA ELV Low Voltage 2-Wire Dimming Electronic Driver (Leading or Trailing Edge)	120V	ELV or TRIAC Dimming @ 120V
ORDER INFO			
PESS	L15.0-LT700	120V	ELV, TRIAC

Example ^

Aesthetics & Options

TRIM	FINISH	COLOR TEMP	OPTIONS
Not Applicable	MH/BBK - Matte White with Bushed Black Trim	30K - 3000K Color Temp	Not Applicable
ORDER INFO			
Not Applicable	MH/BBK	30K	Not Applicable

Example ^

PROD	SOURCE	30K SPECS				
PESS	L15.0	<ul style="list-style-type: none"> • 30K - 3000K Color Temp • 1470 LED Source Lumens • 98 LED Source Lumens Per Watt • 816 Delivered LED Lumens • 54.4 Delivered LED Lumens Per Watt 				

NOTES

Don't see the configuration you are looking for?
Call us today at (513) 858-6004



TERONLIGHTING.COM
33 DONALD DR, FAIRFIELD, OH 45014
P: 513.858.6004 F: 513.858.6038
E: SALES@TERONLIGHT.COM

We reserve the right to revise the design components of any product due to parts availability or change in UL standards, without assuming any obligation or liability to modify any products previously manufactured, and without notice.