

CONCERTO UDL W LED

Architectural Outdoor





PROJECT:		
TYPE:		
PO#:		QTY:
COMMENTS:		

FEATURES

- ADA Compliant
- Aluminum Fixture w/ Textured White Powder Coat Finish
- Aluminum Mounting Plate Mounts to Wall Surface (Centered Over And Attached to J-Box)
- CSA Listed Wet Location For Wall Mount
- Dimmable @ 120/277V
- Direct Up / Down Lighting
- LED Light Fixture
- LEDs Are Shielded And Not Exposed
- Standard IP66 Rated Driver
- Surge Protector
- Wet Location LED Modules
- 0-10V Dimmable

LINE DRAWING

LINE DRAWING NOT TO SCALE

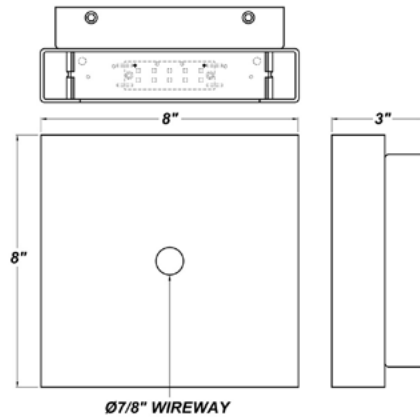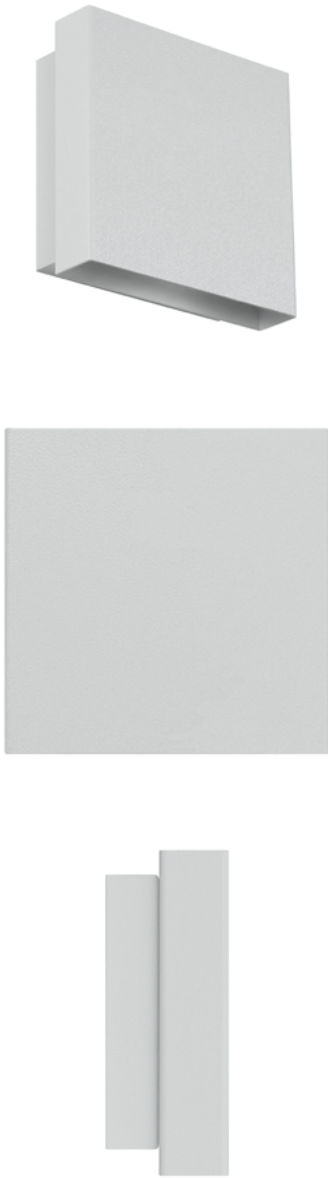


FINISHES


Antique Copper




Antique Silver




Bronze Mist




Matte Silver




Sand




Swedish Steel



Textured Black



Textured Bronze



Textured White



For RAL Colors & Custom Match - Contact Teron Lighting Inc.

CONCERTO UDL W LED

Architectural Outdoor



Fixture Core

PROJECT:	
TYPE:	
PO#:	QTY:
COMMENTS:	

PRODUCT CODE	SOURCE/WATTAGE	VOLTAGE	DIMMING DRIVER
CTO W - Concerto Wet Location	L21.6-ZE600 - 2x10.8W @ 600mA 0-10V Dimming Driver	120V 277V (50 / 60Hz)	(0-10V Dimmable)
ORDER INFO			
CTO W Example ^	L21.6-ZE600	120V	See Source/Wattage

Aesthetics & Options

TRIM	FINISH	COLOR TEMP	OPTIONS
UDL-Up Down Light	AC - Antique Copper AS - Antique Silver BT - Bronze Mist SM - Matte Silver SN - Sand SW - Swedish Steel TB - Textured Black BZ - Textured Bronze TW - Textured White (Standard)	35K - 3500K Color Temp 40K - 4000K Color Temp 50K - 5000K Color Temp	Not Applicable
ORDER INFO			
UDL Example ^	AC	35K	Not Applicable

PROD	SOURCE	35K SPECS				
CTO W UDL	L21.6	<ul style="list-style-type: none"> • 35K - 3500K Color Temp • 1260 Source Lumens • 116.6 Source Lumens Per Watt on The Bottom • 116.6 Source Lumens Per Watt on The Top 				

REPLACEMENT PART	PART NO	NOTES
		Darker Finishes May Reduce The LED Output. Textured White And Matte Silver Are Recommended for Maximum Light Output. Don't see the configuration you are looking for? Call us today at (513) 858-6004



TERONLIGHTING.COM
 33 DONALD DR, FAIRFIELD, OH 45014
 P: 513.858.6004 F: 513.858.6038
 E: SALES@TERONLIGHT.COM



We reserve the right to revise the design components of any product due to parts availability or change in UL standards, without assuming any obligation or liability to modify any products previously manufactured, and without notice.