

TRITON ADA DL LED

Architectural Outdoor



PROJECT:	
TYPE:	
PO#:	QTY:
COMMENTS:	




FEATURES


- ADA Compliant
- Aluminum Housing with Matte Silver Powder Coat Finish
- Aluminum Reflector
- CSA Listed Damp and Wet Location For Wall Mounting -Down Light only
- Centered Over and Mounted to 4" J-Box (By Others)
- Down Light Only
- Dimmable <10% (120VAC Only) With Triac and ELV Dimmers
- Frosted White Acrylic Diffuser
- LED Light Fixture
- Mounting Plate Mounts to Flat Surface

LINE DRAWING

LINE DRAWING NOT TO SCALE

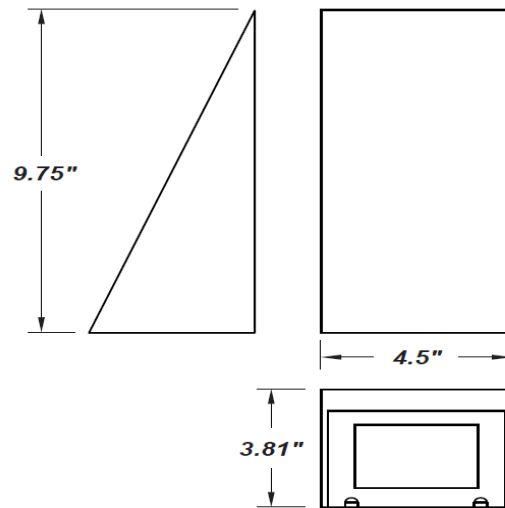

FINISHES

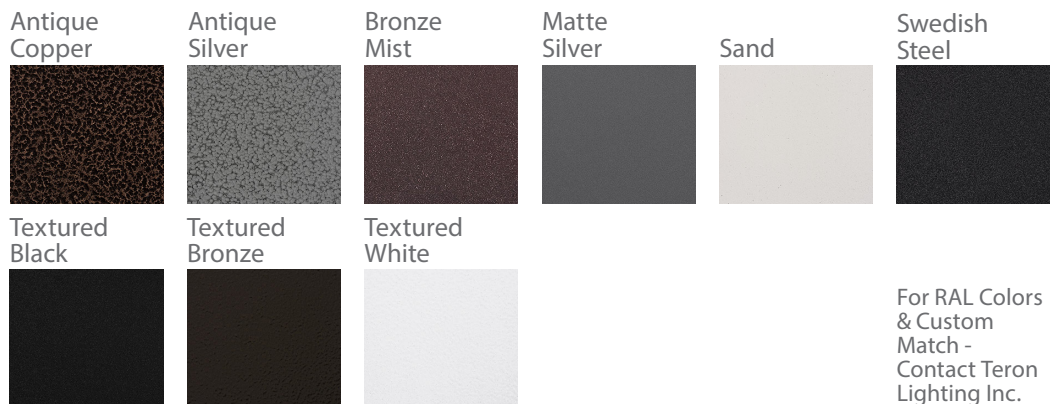

For RAL Colors & Custom Match - Contact Teron Lighting Inc.

TRITON ADA DL LED

Architectural Outdoor



Fixture Core

PROJECT:	
TYPE:	
PO#:	QTY:
COMMENTS:	

PRODUCT CODE	SOURCE/WATTAGE	VOLTAGE	DIMMING DRIVER
TTN-ADA - Triton ADA LED	L12.0-ZT350 - 12.0W @ 350mA Dual Dim Driver:ELV, 0-10V, Triac Dimming	120-277V (50 / 60Hz)	ZT - Dual Dim Which Contains: ELV Dimming, Triac Dimming, and 0-10V Dimming
ORDER INFO			
TTN ADA	L12.0-ZT350	120-277V	ZT

Example ^ (may not represent a manufacturable product)

Aesthetics & Options

TRIM	FINISH	COLOR TEMP	OPTIONS
Not Applicable	AC - Antique Copper AS - Antique Silver BT - Bronze Mist SM - Matte Silver (Standard) SN - Sand SW - Swedish Steel TB - Textured Black BZ - Textured Bronze TW - Textured White	30K - 3000K Color Temp 35K - 3500K Color Temp 40K - 4000K Color Temp 50K - 5000K Color Temp	SPD – Surge Protection Device
ORDER INFO			
Not Applicable	AC	30K	Not Applicable

Example ^ (may not represent a manufacturable product)

PROD	SOURCE	30K SPECS				
TTN-ADA	L12.0	<ul style="list-style-type: none"> 30K - 3000K Color Temp 1465 LED Source Lumens 122 LED Source Lumens per Watt 				

REPLACEMENT PART	PART NO	NOTES
Frosted Arcylic Diffuser	3069460	

Don't see the configuration you are looking for?
Call us today at (513) 858-6004



TERONLIGHTING.COM
33 DONALD DR, FAIRFIELD, OH 45014
P: 513.858.6004 F: 513.858.6038
E: SALES@TERONLIGHT.COM



We reserve the right to revise the design components of any product due to parts availability or change in UL standards, without assuming any obligation or liability to modify any products previously manufactured, and without notice.