

# CORNERSTONE MINI DL LED

Architectural Outdoor



PROJECT:	
TYPE:	
PO#:	QTY:
COMMENTS:	




## FEATURES

- ADA Compliant
- Aluminum Mounting Plate Mounts to Wall Surface (Centered Over And Attached to J-box)
- CSA Listed Wet Location For Wall Mounting
- Clear Polycarbonate Lenses
- Die-Cast Aluminum Housing w/ Textured Black Polyester Powder Coat Finish
- Down Light Only
- LED Light Fixture
- Surge Protector



## LINE DRAWING

LINE DRAWING NOT TO SCALE

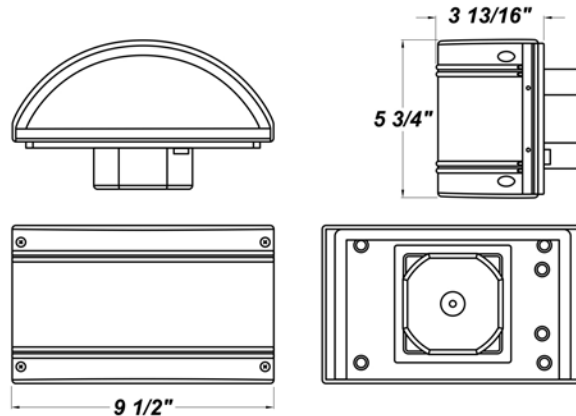


## FINISHES

Antique Copper




Antique Silver




Bronze Mist




Matte Silver




Sand




Swedish Steel




Textured Black



Textured Bronze



Textured White



For RAL Colors & Custom Match - Contact Teron Lighting Inc.

# CORNERSTONE MINI DL LED

Architectural Outdoor



Fixture Core

PROJECT:	
TYPE:	
PO#:	QTY:
COMMENTS:	

PRODUCT CODE	SOURCE/WATTAGE	VOLTAGE	DIMMING DRIVER
<b>CRNM-DL</b> - Cornerstone MINI Down Light	<b>L112.3-12CV</b> - 19W @ 12V Constant Voltage Non-Dimming <b>L114.0-ZE350</b> - 14W @ 350mA 0-10V Dimming Driver <b>L114.0-LT350</b> - 14W @ 350mA Leading and Trailing Edge Dimming Driver	<b>120 - 277V</b> (50 / 60Hz)	<b>Not Applicable</b>
ORDER INFO			
CRNM	L112.3-12CV	120 - 277V	Not Applicable

Example ^ (may not represent a manufacturable product)

Aesthetics & Options

TRIM	FINISH	COLOR TEMP	OPTIONS
<b>Not Applicable</b>	<b>AC</b> - Antique Copper <b>TB</b> - Textured Black (Standard) <b>AS</b> - Antique Silver <b>BT</b> - Bronze Mist <b>BZ</b> - Textured Bronze <b>SM</b> - Matte Silver <b>SN</b> - Sand <b>TW</b> - Textured White <b>SW</b> - Swedish Steel	<b>27K</b> - 2700K Color Temp <b>30K</b> - 3000K Color Temp <b>35K</b> - 3500K Color Temp <b>40K</b> - 4000K Color Temp <b>50K</b> - 5000K Color Temp	<b>CPL</b> - Clear Polycarbonate Lens (Standard) <b>F</b> - Fused <b>FAL</b> - Frosted Acrylic Lens <b>TP</b> - Tamper Resistant Screws
ORDER INFO			
Not Applicable	AC	27K	CPL

Example ^ (may not represent a manufacturable product)

PROD	SOURCE	30K SPECS				
CRNM	L112.3	<ul style="list-style-type: none"> <li>30K - 3000K Color Temp</li> <li>1264 LED Source Lumens</li> <li>66.5 LED Source Lumens Per Watt</li> </ul>				
	L114	<ul style="list-style-type: none"> <li>30K - 3000K Color Temp</li> <li>1465 LED Source Lumens</li> <li>104.6 LED Source Lumens Per Watt</li> </ul>				

REPLACEMENT PART	PART NO	NOTES
Clear Polycarbonate Lens	34105	*Leading and Trailing Edge Drivers are dimmable @120V Only
Frosted Acrylic Lens	3056462	*Constant Voltage Drivers are non dimmable

Don't see the configuration you are looking for?  
Call us today at (513) 858-6004



TERONLIGHTING.COM  
 33 DONALD DR, FAIRFIELD, OH 45014  
 P: 513.858.6004 F: 513.858.6038  
 E: SALES@TERONLIGHT.COM



We reserve the right to revise the design components of any product due to parts availability or change in UL standards, without assuming any obligation or liability to modify any products previously manufactured, and without notice.