

FAULTLESS LED 19"

Architectural Indoor



PROJECT:	
TYPE:	
PO#:	QTY:
COMMENTS:	


FEATURES

- Steel Mounting Pan w/ Hi-Reflectance White Powder Coat Finish (For L21.0 & L37.5)
- Aluminum Mounting Pan w/ Hi-Reflectance White Powder Coat Finish (For L30.0)
- Luminous White Acrylic Diffuser
- Mounts Directly to 4" Junction Box (By Others)
- IES Files Available
- ADA Compliant
- CSA Listed Damp Location
- Emergency Battery Available
- LED Light Fixture
- Mounting Hardware Included




LINE DRAWING

LINE DRAWING NOT TO SCALE

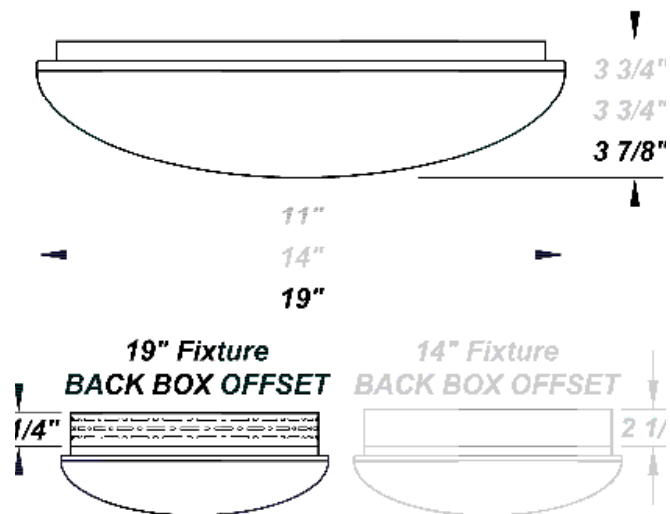

FINISHES

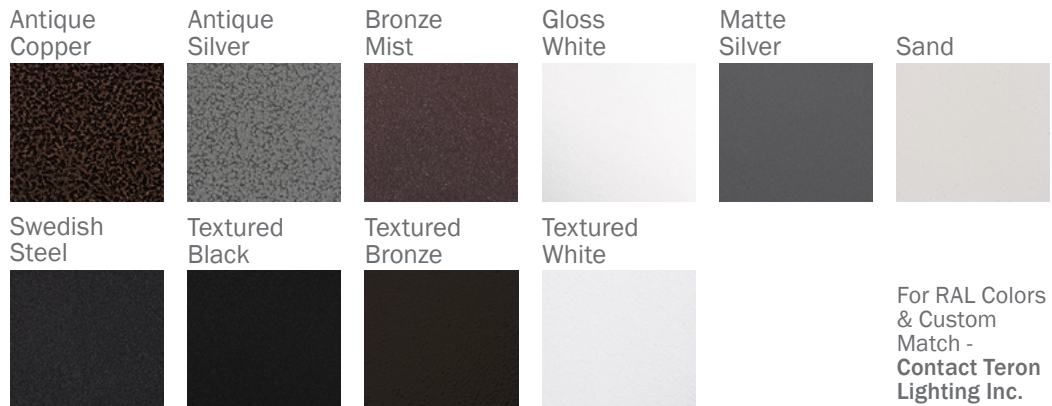

FAULTLESS LED 19"

Architectural Indoor



Fixture Core

PROJECT:	
TYPE:	
PO#:	QTY:
COMMENTS:	

PRODUCT CODE	SOURCE/WATTAGE	VOLTAGE	DIMMING DRIVER
FS19 - Faultless 19"	L21.0-ZE550 - (60) LED Array @ Line Voltage 4-Wire Dimming Driver (Dimmable 0 - 10V) L28.5-ZE750 - (60) LED Array @ Line Voltage 4-Wire Dimming Driver (Dimmable 0 - 10V)	120-277V (50 / 60Hz)	ZE - 0-10V Dimming
ORDER INFO			
FS19 Example ^	L20.5-ZE640	120-277V	Not Applicable

Aesthetics & Options

TRIM	FINISH	COLOR TEMP	OPTIONS
Not Applicable	AC - Antique Copper TB - Textured Black AS - Antique Silver BT - Bronze Mist BZ - Textured Bronze WH - Gloss White (Standard) TW - Textured White SM - Matte Silver SN - Sand SW - Swedish Steel	30K - 3000K Color Temp 35K - 3500K Color Temp 40K - 4000K Color Temp 50K - 5000K Color Temp	ALP - Aluminum Mount Pan BB - Back Box EB/BB - Bodine BSL26 - Up to 5.1W Emergency Illumination w/ LEDs (Back Box Required)** F - Fused SP - Surge Protector STC12-WH - 12" Stem and Canopy Kit STC24-WH - 24" Stem and Canopy Kit STC36-WH - 36" Stem and Canopy Kit STC48-WH - 48" Stem and Canopy Kit TP - Tamper-Proof Screw Set WAL - White Acrylic WPL - White Polycarbonate
ORDER INFO			
Not Applicable Example ^	AC	30K	ALP

PROD	SOURCE	30K SPECS				
FS 19"	L21.0	<ul style="list-style-type: none"> 80 CRI Typ. 30K - 3000K Color Temp 3100 LED Source Lumens 151 LED Source Lumens Per Watt 1737 Delivered LED Lumens 72.4 Delivered LED Lumens Per Watt 				
	L28.5	<ul style="list-style-type: none"> 80 CRI Typ. 30K - 3000K Color Temp 4100 LED Source Lumens 144 LED Source Lumens Per Watt 				

REPLACEMENT PART	PART NO	NOTES
19" White Acrylic Diffuser	3019960	**AC Mode 960 Lumens
19" White Acrylic LED Diffuser	3069160	Battery @ 1 second = 322 Total Lumens Battery @ 90 Minutes = 291 Total Lumens (Please Specify Voltage)
		Don't see the configuration you are looking for? Call us today at (513) 858-6004



TERONLIGHTING.COM
 33 DONALD DR, FAIRFIELD, OH 45014
 P: 513.858.6004 F: 513.858.6038
 E: SALES@TERONLIGHT.COM



We reserve the right to revise the design components of any product due to parts availability or change in UL standards, without assuming any obligation or liability to modify any products previously manufactured, and without notice.

FAULTLESS LED 19"

Architectural Indoor



Fixture Core

PROJECT:	
TYPE:	
PO#:	QTY:
COMMENTS:	

PRODUCT CODE	SOURCE/WATTAGE	VOLTAGE	DIMMING DRIVER
FS19 - Faultless 19"	L37.5-ZE1050 - (120) LED Array @ Line Voltage 4-Wire Dimming Driver (Dimmable 0 - 10V)	120-277V (50 / 60Hz)	ZE - 0-10V Dimming
ORDER INFO			
FS19 Example ^	L37.5-ZE1050	120 - 270V	Not Applicable

Aesthetics & Options

TRIM	FINISH	COLOR TEMP	OPTIONS
Not Applicable	AC - Antique Copper AS - Antique Silver BT - Bronze Mist WH - Gloss White (Standard) SM - Matte Silver SN - Sand SW - Swedish Steel TB - Textured Black BZ - Textured Bronze TW - Textured White	30K - 3000K Color Temp 35K - 3500K Color Temp 40K - 4000K Color Temp 50K - 5000K Color Temp	ALP - Aluminum Mount Pan BB - Back Box EB/BB - Bodine BSL26 - Up to 5.1W Emergency Illumination w/ LEDs (Back Box Required)** F - Fused SP - Surge Protector STC12-WH - 12" Stem and Canopy Kit STC24-WH - 24" Stem and Canopy Kit STC36-WH - 36" Stem and Canopy Kit STC48-WH - 48" Stem and Canopy Kit TP - Tamper-Proof Screw Set WAL - White Acrylic WPL - White Polycarbonate
ORDER INFO			
Not Applicable Example ^	AC	30K	ALP

PROD	SOURCE	30K SPECS				
FS 19"	L37.5	<ul style="list-style-type: none"> • 80 CRI Typ. • 30K - 3000K Color Temp • 4845 LED Source Lumens • 135.4 LED Source Lumens Per Watt • 2879 Delivered LED Lumens • 80 Delivered LED Lumens Per Watt 				

REPLACEMENT PART	PART NO	NOTES
19" White Acrylic Diffuser	3019960	**AC Mode 960 Lumens Battery @ 1 second = 322 Total Lumens Battery @ 90 Minutes = 291 Total Lumens (Please Specify Voltage)
19" White Acrylic LED Diffuser	3069160	
		Don't see the configuration you are looking for? Call us today at (513) 858-6004



TERONLIGHTING.COM
 33 DONALD DR, FAIRFIELD, OH 45014
 P: 513.858.6004 F: 513.858.6038
 E: SALES@TERONLIGHT.COM



We reserve the right to revise the design components of any product due to parts availability or change in UL standards, without assuming any obligation or liability to modify any products previously manufactured, and without notice.