

NIKE C LED 12"

Architectural Indoor




PROJECT:	
TYPE:	
PO#:	QTY:
COMMENTS:	

FEATURES

- ADA Compliant
- CSA Listed Damp Location for Ceiling and Wall Mount
- Die-Form Cold-Rolled Steel Housing w/ Brushed Nickel Plated Finish
- IES Files Are Available
- LED Light Fixture
- Luminous White Acrylic Diffuser
- L70 Life time for 60,000hr
- Mounting Hardware Included
- Mounts Directly to 4" Junction Box (By Others)
- Steel Mounting Pan w/ Hi-Reflectance White Powder Coat Finish
- Steel Trim w/ Brushed Nickel Plated Finish




LINE DRAWING

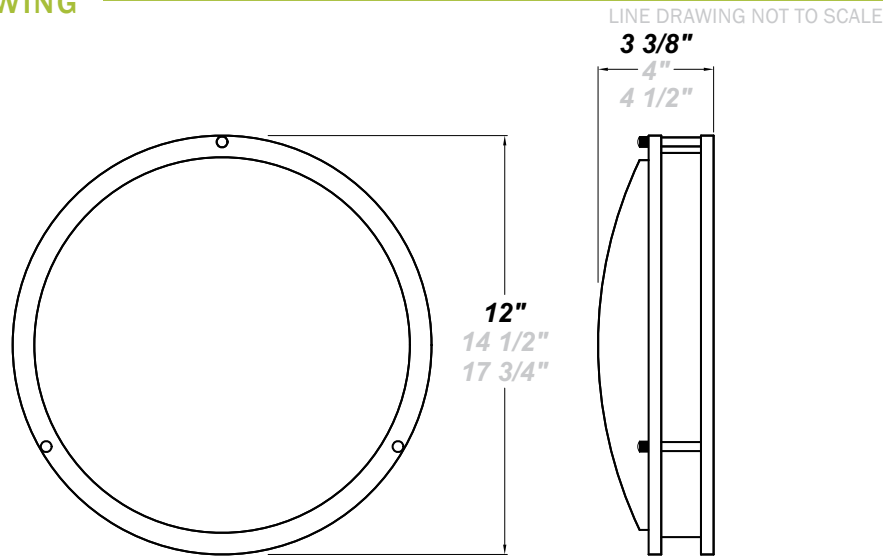


FINISHES


Antique Copper




Antique Silver




Bronze Mist




Matte Silver



Sand




Swedish Steel




Textured Black



Textured Bronze



Textured White



For RAL Colors & Custom Match - Contact Teron Lighting Inc.

NIKE C LED 12"

Architectural Indoor



Fixture Core

PROJECT:	
TYPE:	
PO#:	QTY:
COMMENTS:	

PRODUCT CODE	SOURCE/WATTAGE	VOLTAGE	DIMMING DRIVER
NEC12 - Nike C 12"	L13.5-ZE420 - (60) LED Array @ 420mA Line Voltage 4-Wire Dimming Driver (Dimmable 0 - 10V) L17.0-ZE530 - (60) LED Array @ 530mA Line Voltage 4-Wire Dimming Driver (Dimmable 0 - 10V)	120-277V (50 / 60Hz)	ZE - 0-10V Dimming
ORDER INFO			
NEC12 Example ^	L13.0-ZE560	120V	ZE

Aesthetics & Options

TRIM	FINISH	COLOR TEMP	OPTIONS
Not Applicable	AC - Antique Copper AS - Antique Silver BT - Bronze Mist BN - Brushed Nickel (Standard) SM - Matte Silver SN - Sand SW - Swedish Steel TB - Textured Black BZ - Textured Bronze TW - Textured White	30K - 3000K Color Temp 35K - 3500K Color Temp 40K - 4000K Color Temp 50K - 5000K Color Temp	F - Fused STC12-WH - 12" Stem / Canopy Kits STC24-WH - 24" Stem / Canopy Kits STC36-WH - 36" Stem / Canopy Kits STC48-WH - 48" Stem / Canopy Kits
ORDER INFO			
Not Applicable Example ^	AC	27K	F

PROD	SOURCE	30K SPECS				
NEC12	L13.0	<ul style="list-style-type: none"> 80 CRI 1700 LED Source Lumens 105 LED Source Lumens Per Watt 986 Delivered LED Lumens 65.5 Delivered LED Lumens Per Watt 				
	L17.0	<ul style="list-style-type: none"> 80 CRI Typ. 2650 LED Source Lumens 157 LED Source Lumens Per Watt 				

REPLACEMENT PART	PART NO	NOTES
12" White Acrylic Diffuser	3035960	(All Stem Canopy Kits Are White Finish Unless Other Finish is Specified When Ordering)
		Don't see the configuration you are looking for? Call us today at (513) 858-6004



TERONLIGHTING.COM
 33 DONALD DR, FAIRFIELD, OH 45014
 P: 513.858.6004 F: 513.858.6038
 E: SALES@TERONLIGHT.COM



We reserve the right to revise the design components of any product due to parts availability or change in UL standards, without assuming any obligation or liability to modify any products previously manufactured, and without notice.

NIKE C LED 12"

Architectural Indoor



Fixture Core

PROJECT:	
TYPE:	
PO#:	QTY:
COMMENTS:	

PRODUCT CODE	SOURCE/WATTAGE	VOLTAGE	DIMMING DRIVER
NEC12 - Nike C 12"	L20.5-ZE640 - (60) LED Array @ 640mA Line Voltage 4-Wire Dimming Driver (Dimmable 0 - 10V)	120-277V (50 / 60Hz)	ZE - 0-10V Dimming
ORDER INFO			
NEC12 Example ^	L13.0-ZE560	120V	ZE

Aesthetics & Options

TRIM	FINISH	COLOR TEMP	OPTIONS
Not Applicable	AC - Antique Copper AS - Antique Silver BT - Bronze Mist BN - Brushed Nickel (Standard) SM - Matte Silver SN - Sand SW - Swedish Steel TB - Textured Black BZ - Textured Bronze TW - Textured White	30K - 3000K Color Temp 35K - 3500K Color Temp 40K - 4000K Color Temp 50K - 5000K Color Temp	F - Fused STC12-WH - 12" Stem / Canopy Kits STC24-WH - 24" Stem / Canopy Kits STC36-WH - 36" Stem / Canopy Kits STC48-WH - 48" Stem / Canopy Kits
ORDER INFO			
Not Applicable Example ^	AC	27K	F

PROD	SOURCE	30K SPECS				
NEC12	L20.5	<ul style="list-style-type: none"> 80 CRI Typ. 30K - 3000K Color Temp 3100 LED Source Lumens 151 LED Source Lumens Per Watt 				

REPLACEMENT PART	PART NO	NOTES
12" White Acrylic Diffuser	3035960	(All Stem Canopy Kits Are White Finish Unless Other Finish is Specified When Ordering)
		Don't see the configuration you are looking for? Call us today at (513) 858-6004



TERONLIGHTING.COM
 33 DONALD DR, FAIRFIELD, OH 45014
 P: 513.858.6004 F: 513.858.6038
 E: SALES@TERONLIGHT.COM



We reserve the right to revise the design components of any product due to parts availability or change in UL standards, without assuming any obligation or liability to modify any products previously manufactured, and without notice.