

NIKE C LED 18"

Architectural Indoor




PROJECT:	
TYPE:	
PO#:	QTY:
COMMENTS:	

FEATURES


- ADA Compliant
- CSA Listed Damp Location for Ceiling and Wall Mount
- Die-Form Cold-Rolled Steel Housing w/ Brushed Nickel Plated Finish
- Emergency Battery Available
- IES Files Are Available
- LED Light Fixture
- Luminous White Acrylic Diffuser
- L70 Life time for 60,000hr (L21.0 only)
- Mounting Hardware Included
- Mounts Directly to 4" Junction Box (By Others)
- Steel Mounting Pan w/ Hi-Reflectance White Powder Coat Finish
- Steel Trim w/ Brushed Nickel Plated Finish



LINE DRAWING

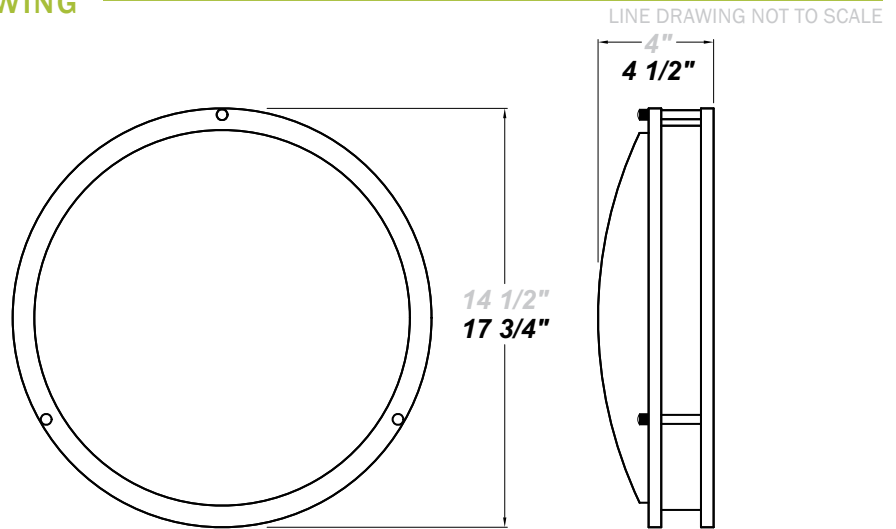

FINISHES

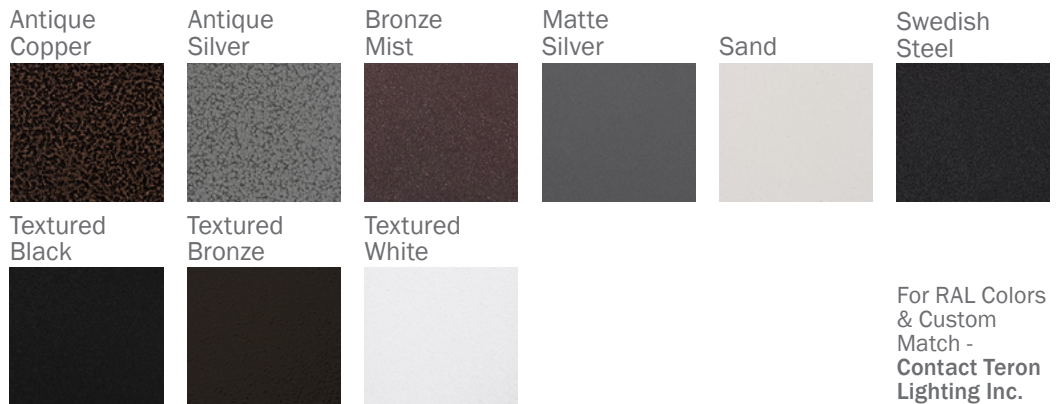

NIKE C LED 18"

Architectural Indoor



Fixture Core

PROJECT:	
TYPE:	
PO#:	QTY:
COMMENTS:	

PRODUCT CODE	SOURCE/WATTAGE	VOLTAGE	DIMMING DRIVER
NEC18 - Nike C 18"	L21.0-ZE550 - (80) LED Array @ 700mA Line Voltage 4-Wire Dimming Driver (Dimmable 0 - 10V) L28.5-ZE750 - (80) LED Array @ 700mA Line Voltage 4-Wire Dimming Driver (Dimmable 0 - 10V)	120-277V (50 / 60Hz)	ZE - 0-10V Dimming
ORDER INFO			
NEC18 Example ^	L21.0-ZE700	120V	ZE

Aesthetics & Options

TRIM	FINISH	COLOR TEMP	OPTIONS
Not Applicable	AC - Antique Copper TB - Textured Black AS - Antique Silver BT - Bronze Mist BZ - Textured Bronze BN - Brushed Nickel (Standard) TW - Textured White SM - Matte Silver SN - Sand SW - Swedish Steel	30K - 3000K Color Temp 35K - 3500K Color Temp 40K - 4000K Color Temp 50K - 5000K Color Temp	BB - Back Box EBW/BB - Bodine BSL26 - Up to 5.1W Emergency Illumination With LEDs (Back Box Required)* F - Fused STC12-WH - 12" Stem / Canopy Kits STC24-WH - 24" Stem / Canopy Kits STC36-WH - 36" Stem / Canopy Kits STC48-WH - 48" Stem / Canopy Kits SP - Surge Protector
ORDER INFO			
Not Applicable Example ^	AC	27K	BB

PROD	SOURCE	30K SPECS				
NEC18	L21.0	<ul style="list-style-type: none"> 30K - 3000K Color Temp 3100 LED Source Lumens 151 LED Source Lumens Per Watt 				
	L28.5	<ul style="list-style-type: none"> 30K - 3000K Color Temp 4100 LED Source Lumens 149 LED Source Lumens Per Watt 				

REPLACEMENT PART	PART NO	NOTES
18" White Acrylic Diffuser	3049760	(All Stem Canopy Kits Are White Finish Unless Other Finish is Specified When Ordering) *Emergency Battery Options - AC Mode 960 Lumens Battery @ 1 second = 322 Total Lumens Battery @ 90 Minutes = 291 Total Lumens Don't see the configuration you are looking for? Call us today at (513) 858-6004



TERONLIGHTING.COM
 33 DONALD DR, FAIRFIELD, OH 45014
 P: 513.858.6004 F: 513.858.6038
 E: SALES@TERONLIGHT.COM



We reserve the right to revise the design components of any product due to parts availability or change in UL standards, without assuming any obligation or liability to modify any products previously manufactured, and without notice.

NIKE C LED 18"

Architectural Indoor



Fixture Core

PROJECT:	
TYPE:	
PO#:	QTY:
COMMENTS:	

PRODUCT CODE	SOURCE/WATTAGE	VOLTAGE	DIMMING DRIVER
NEC18 - Nike C 18"	L30.0-ZE1000 - (60) LED Array @ 1000mA Line Voltage 4-Wire Dimming Driver (Dimmable 0 - 10V) L37.5-ZE1050 - (120) LED Array @ 1050mA Line Voltage 4-Wire Dimming Driver (Dimmable 0 - 10V)	120 - 277V (50 / 60Hz)	ZE - 0-10V Dimming
ORDER INFO			
NEC18 Example ^	L37.5-ZE1050	120 - 277V	ZE

Aesthetics & Options

TRIM	FINISH	COLOR TEMP	OPTIONS
Not Applicable	AC - Antique Copper TB - Textured Black AS - Antique Silver BT - Bronze Mist BZ - Textured Bronze BN - Brushed Nickel (Standard) TW - Textured White SM - Matte Silver SN - Sand SW - Swedish Steel	30K - 3000K Color Temp 35K - 3500K Color Temp 40K - 4000K Color Temp 40K - 4000K Color Temp 50K - 5000K Color Temp	BB - Back Box EBW/BB - Bodine BSL26 - Up to 5.1W Emergency Illumination With LEDs (Back Box Required)* F - Fused STC12-WH - 12" Stem / Canopy Kits STC24-WH - 24" Stem / Canopy Kits STC36-WH - 36" Stem / Canopy Kits STC48-WH - 48" Stem / Canopy Kits SP - Surge Protector
ORDER INFO			
Not Applicable Example ^	AC	27K	BB

PROD	SOURCE	30K SPECS				
NEC18	L30.0	<ul style="list-style-type: none"> 30K - 3000K Color Temp 4522 LED Source Lumens 134 LED Source Lumens Per Watt 2134 Delivered LED Lumens 62.7 Delivered LED Lumens Per Watt 				
	L37.5	<ul style="list-style-type: none"> 30K - 3000K Color Temp 4845 LED Source Lumens 135.4 LED Source Lumens Per Watt 2596 Delivered LED Lumens 70.2 Delivered LED Lumens Per Watt 				

REPLACEMENT PART	PART NO	NOTES
18" White Acrylic Diffuser	3049760	(All Stem Canopy Kits Are White Finish Unless Other Finish is Specified When Ordering) *Emergency Battery Options - AC Mode 960 Lumens Battery @ 1 second = 322 Total Lumens Battery @ 90 Minutes = 291 Total Lumens Don't see the configuration you are looking for? Call us today at (513) 858-6004



TERONLIGHTING.COM
 33 DONALD DR, FAIRFIELD, OH 45014
 P: 513.858.6004 F: 513.858.6038
 E: SALES@TERONLIGHT.COM



We reserve the right to revise the design components of any product due to parts availability or change in UL standards, without assuming any obligation or liability to modify any products previously manufactured, and without notice.