

NIKE P LED 14"

Architectural Indoor



PROJECT:	
TYPE:	
PO#:	QTY:
COMMENTS:	


FEATURES

- Die-Form Cold-Rolled Steel Housing w/ Brushed Nickel Plated Finish
- Dry Location
- LED Light Fixture
- Luminous White Acrylic Diffuser
- Mounting Hardware Included
- Mounts Directly to 4" Junction Box (By Others)
- Steel Canopy and Stems w/ Brushed Nickel Plated Finish
- Steel Mounting Pan w/ Hi-Reflectance White Powder Coat Finish
- Steel Trim w/ Brushed Nickel Plated Finish



LINE DRAWING

LINE DRAWING NOT TO SCALE

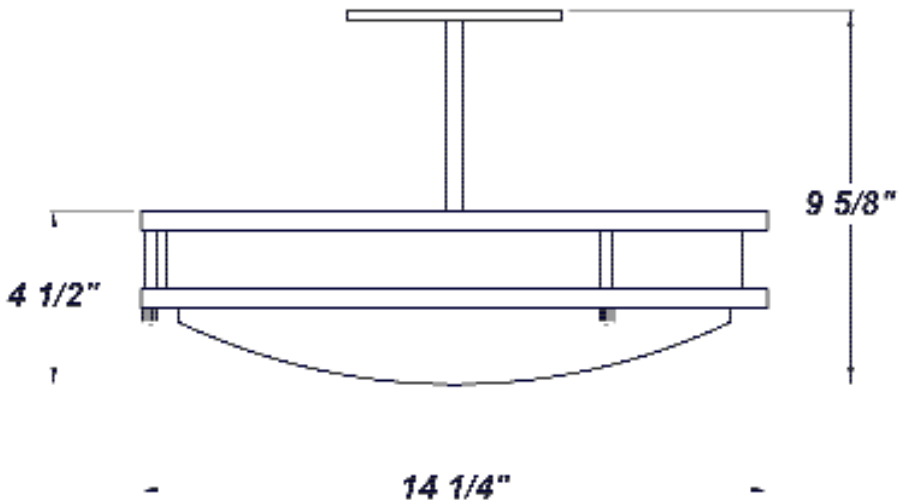

FINISHES

Antique Copper 	Antique Silver 	Bronze Mist 	Matte Silver 	Sand 	Swedish Steel
Textured Black 	Textured Bronze 	Textured White 			

For RAL Colors & Custom Match - Contact Teron Lighting Inc.

NIKE P LED 14"

Architectural Indoor



Fixture Core

PROJECT:	
TYPE:	
PO#:	QTY:
COMMENTS:	

PRODUCT CODE	SOURCE/WATTAGE	VOLTAGE	DIMMING DRIVER
NEP14 - Nike P 14 1/2"	L13.5-ZE420 - (60) LED Array @ 420mA Line Voltage 4-Wire Dimming Driver (Dimmable 0 - 10V) L17.0-ZE530 - (60) LED Array @ 530mA Line Voltage 4-Wire Dimming Driver (Dimmable 0 - 10V)	120-277V (50 / 60Hz)	ZE - 0-10V Dimming
ORDER INFO			
NEP14 Example ^	L13.0-ZE560	120V	ZE

Aesthetics & Options

TRIM	FINISH	COLOR TEMP	OPTIONS
Not Applicable	AC - Antique Copper TB - Textured Black AS - Antique Silver BT - Bronze Mist BZ - Textured Bronze BN - Brushed Nickel (Standard) TW - Textured White SM - Matte Silver SN - Sand SW - Swedish Steel	30K - 3000K Color Temp 35K - 3500K Color Temp 40K - 4000K Color Temp 50K - 5000K Color Temp	F - Fused
ORDER INFO			
Not Applicable Example ^	AC	30K	F

PROD	SOURCE	30K SPECS				
NEP14	L13.0	<ul style="list-style-type: none"> • 30K - 3000K Color Temp • 1700 LED Source Lumens • 105 LED Source Lumens Per Watt • 986 Delivered LED Lumens • 65.5 Delivered LED Lumens Per Watt 				
	L16.3	<ul style="list-style-type: none"> • 30K - 3000K Color Temp • 2110 LED Source Lumens • 103 LED Source Lumens Per Watt • 1530 Delivered LED Lumens • 82.3 Delivered LED Lumens Per Watt 				

REPLACEMENT PART	PART NO	NOTES
14" White Acrylic Diffuser	3049660	
		Don't see the configuration you are looking for? Call us today at (513) 858-6004



TERONLIGHTING.COM
 33 DONALD DR, FAIRFIELD, OH 45014
 P: 513.858.6004 F: 513.858.6038
 E: SALES@TERONLIGHT.COM



We reserve the right to revise the design components of any product due to parts availability or change in UL standards, without assuming any obligation or liability to modify any products previously manufactured, and without notice.

NIKE P LED 14"

Architectural Indoor



Fixture Core

PROJECT:	
TYPE:	
PO#:	QTY:
COMMENTS:	

PRODUCT CODE	SOURCE/WATTAGE	VOLTAGE	DIMMING DRIVER
NEP14 - Nike P 14 1/2"	L20.5-ZE640 - (60) LED Array @640mA Line Voltage 4-Wire Dimming Driver (Dimmable 0 - 10V)	120-277V (50 / 60Hz)	ZE - 0-10V Dimming
ORDER INFO			
NEP14 Example ^	L21.0-ZE700	120V	Not Applicable

Aesthetics & Options

TRIM	FINISH	COLOR TEMP	OPTIONS
Not Applicable	AC - Antique Copper AS - Antique Silver BT - Bronze Mist BN - Brushed Nickel (Standard) SM - Matte Silver SN - Sand SW - Swedish Steel TB - Textured Black BZ - Textured Bronze TW - Textured White	30K - 3000K Color Temp 35K - 3500K Color Temp 40K - 4000K Color Temp 50K - 5000K Color Temp	F - Fused
ORDER INFO			
Not Applicable Example ^	AC	27K	F

PROD	SOURCE	30K SPECS				
NEP14	L21.0	<ul style="list-style-type: none"> • 30K - 3000K Color Temp • 2640 LED Source Lumens • 105 LED Source Lumens Per Watt • 1861 Delivered LED Lumens • 77.4 Delivered LED Lumens Per Watt 				

REPLACEMENT PART	PART NO	NOTES
14" White Acrylic Diffuser	3049660	
		Don't see the configuration you are looking for? Call us today at (513) 858-6004



TERONLIGHTING.COM
 33 DONALD DR, FAIRFIELD, OH 45014
 P: 513.858.6004 F: 513.858.6038
 E: SALES@TERONLIGHT.COM



We reserve the right to revise the design components of any product due to parts availability or change in UL standards, without assuming any obligation or liability to modify any products previously manufactured, and without notice.