

NIKE P LED 17"

Architectural Indoor



| | |
|-----------|------|
| PROJECT: | |
| TYPE: | |
| PO#: | QTY: |
| COMMENTS: | |


FEATURES

- Die-Form Cold-Rolled Steel Housing w/ Brushed Nickel Plated Finish
- Dry Location
- LED Light Fixture
- Luminous White Acrylic Diffuser
- Mounting Hardware Included
- Mounts Directly to 4" Junction Box (By Others)
- Steel Canopy and Stems w/ Brushed Nickel Plated Finish
- Steel Mounting Pan w/ Hi-Reflectance White Powder Coat Finish
- Steel Trim w/ Brushed Nickel Plated Finish



LINE DRAWING

LINE DRAWING NOT TO SCALE

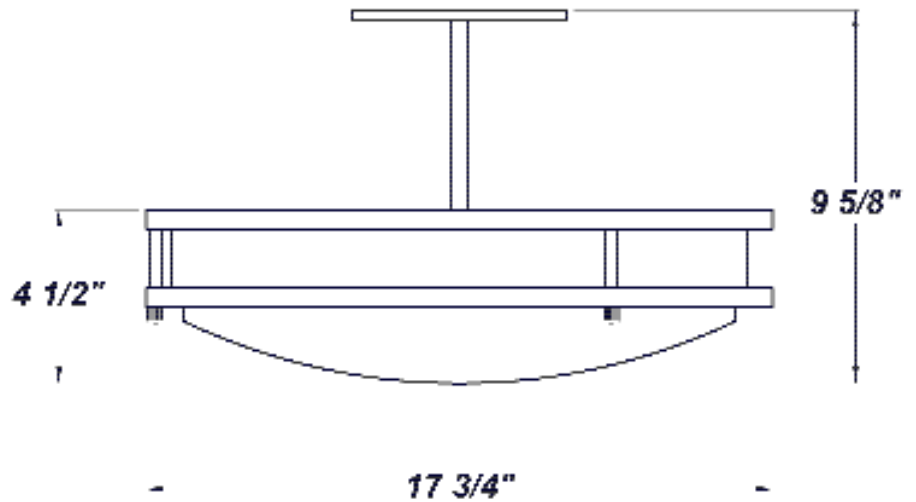

FINISHES

| | | | | | |
|----------------|-----------------|----------------|--------------|------|---------------|
| Antique Copper | Antique Silver | Bronze Mist | Matte Silver | Sand | Swedish Steel |
| | | | | | |
| Textured Black | Textured Bronze | Textured White | | | |
| | | | | | |

For RAL Colors & Custom Match - Contact Teron Lighting Inc.

NIKE P LED 17"

Architectural Indoor



Fixture Core

| | |
|-----------|------|
| PROJECT: | |
| TYPE: | |
| PO#: | QTY: |
| COMMENTS: | |

| PRODUCT CODE | SOURCE/WATTAGE | VOLTAGE | DIMMING DRIVER |
|------------------------|--|--------------------------------|---------------------------|
| NEP18 - Nike P 17 3/4" | L21.0-ZE550 - (80) LED Array @ 700mA Line Voltage 4-Wire Dimming Driver (Dimmable 0 - 10V) L28.5-ZE750 - (80) LED Array @ 700mA Line Voltage 4-Wire Dimming Driver (Dimmable 0 - 10V) | 120-277V (50 / 60Hz) | ZE - 0-10V Dimming |
| ORDER INFO | | | |
| NEP18 Example ^ | L21.0-ZE700 | 120V | Not Applicable |

Aesthetics & Options

| TRIM | FINISH | COLOR TEMP | OPTIONS |
|-----------------------------|---|--|------------------|
| Not Applicable | AC - Antique Copper TB - Textured Black AS - Antique Silver BT - Bronze Mist BZ - Textured Bronze BN - Brushed Nickel (Standard) TW - Textured White SM - Matte Silver SN - Sand SW - Swedish Steel | 30K - 3000K Color Temp 35K - 3500K Color Temp 40K - 4000K Color Temp 50K - 5000K Color Temp | F - Fused |
| ORDER INFO | | | |
| Not Applicable Example ^ | AC | 27K | F |

| PROD | SOURCE | 30K SPECS | | | |
|-------|--------|--|--|--|--|
| NEP18 | L21.0 | <ul style="list-style-type: none"> 30K - 3000K Color Temp 3100 LED Source Lumens 151 LED Source Lumens Per Watt | | | |
| | L28.5 | <ul style="list-style-type: none"> 30K - 3000K Color Temp 4100 LED Source Lumens 151 LED Source Lumens Per Watt | | | |

| REPLACEMENT PART | PART NO | NOTES |
|----------------------------|---------|---|
| 18" White Acrylic Diffuser | 3049760 | |
| | | Don't see the configuration you are looking for? Call us today at (513) 858-6004 |



TERONLIGHTING.COM
 33 DONALD DR, FAIRFIELD, OH 45014
 P: 513.858.6004 F: 513.858.6038
 E: SALES@TERONLIGHT.COM



We reserve the right to revise the design components of any product due to parts availability or change in UL standards, without assuming any obligation or liability to modify any products previously manufactured, and without notice.

NIKE P LED 17"

Architectural Indoor



Fixture Core

| | |
|-----------|------|
| PROJECT: | |
| TYPE: | |
| PO#: | QTY: |
| COMMENTS: | |

| PRODUCT CODE | SOURCE/WATTAGE | VOLTAGE | DIMMING DRIVER |
|------------------------|---|--------------------------------|---------------------------|
| NEP18 - Nike P 17 3/4" | L30.0-ZE1000 - (60) LED Array @ 1000mA Line Voltage 4-Wire Dimming Driver (Dimmable 0 - 10V) L37.5-ZE1050 - (120) LED Array @ 1050mA Line Voltage 4-Wire Dimming Driver (Dimmable 0 - 10V) | 120-277V (50 / 60Hz) | ZE - 0-10V Dimming |
| ORDER INFO | | | |
| NEP18 Example ^ | L37.5-ZE1050 | 120V | Not Applicable |

Aesthetics & Options

| TRIM | FINISH | COLOR TEMP | OPTIONS |
|-----------------------------|---|--|------------------|
| Not Applicable | AC - Antique Copper TB - Textured Black AS - Antique Silver BT - Bronze Mist BZ - Textured Bronze BN - Brushed Nickel (Standard) TW - Textured White SM - Matte Silver SN - Sand SW - Swedish Steel | 30K - 3000K Color Temp 35K - 3500K Color Temp 40K - 4000K Color Temp 50K - 5000K Color Temp | F - Fused |
| ORDER INFO | | | |
| Not Applicable Example ^ | AC | 27K | F |

| PROD | SOURCE | 30K SPECS | | | | |
|-------|--------|---|--|--|--|--|
| NEP18 | L30.0 | <ul style="list-style-type: none"> • 30K - 3000K Color Temp • 4522 LED Source Lumens • 134 LED Source Lumens Per Watt • 2134 Delivered LED Lumens • 62.7 Delivered LED Lumens Per Watt | | | | |
| | L37.5 | <ul style="list-style-type: none"> • 30K - 3000K Color Temp • 4845 LED Source Lumens • 135.4 LED Source Lumens Per Watt • 2596 Delivered LED Lumens • 70.2 Delivered LED Lumens Per Watt | | | | |

| REPLACEMENT PART | PART NO | NOTES |
|----------------------------|---------|---|
| 18" White Acrylic Diffuser | 3049760 | |
| | | Don't see the configuration you are looking for? Call us today at (513) 858-6004 |



TERONLIGHTING.COM
 33 DONALD DR, FAIRFIELD, OH 45014
 P: 513.858.6004 F: 513.858.6038
 E: SALES@TERONLIGHT.COM



We reserve the right to revise the design components of any product due to parts availability or change in UL standards, without assuming any obligation or liability to modify any products previously manufactured, and without notice.