

SILHOUETTE RD SM LED

Architectural Indoor



PROJECT:	
TYPE:	
PO#:	QTY:
COMMENTS:	


FEATURES

- CSA Listed Dry Location For Ceiling Mount Only
- LED Light Fixture
- Luminous White Acrylic Diffuser W/ Decorative Fabric Trim (Gold Vein, Mocha, Natural Linen, and White Linen)
- Mounting Hardware Included
- Mounts Directly to 4" Junction Box (By Others)
- Stem and Conopy Kits Available
- Steel Mounting Pan w/ Hi-Reflectance White Powder Coat Finish
- Textured Nickel Has a Luminous White Acrylic Diffuser w/ Solid Vinyl Material Providing Down Light Only



LINE DRAWING

LINE DRAWING NOT TO SCALE

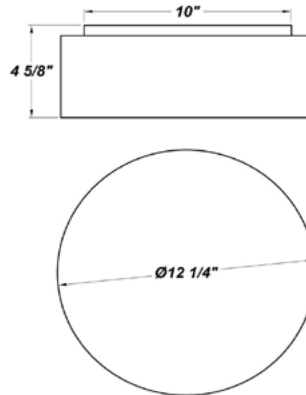

FINISHES


Textured Nickel Vinyl



Gold Vein



Mocha



Natural Linen



White Linen



For RAL Colors & Custom Match - Contact Teron Lighting Inc.

SILHOUETTE RD SM LED

Architectural Indoor



Fixture Core

PROJECT:	
TYPE:	
PO#:	QTY:
COMMENTS:	

PRODUCT CODE	SOURCE/WATTAGE	VOLTAGE	DIMMING DRIVER
SHRS12 - Silhouette RD SM	L13.5-ZE420 - (48) LED Array @420mA Line Voltage 4-Wire Dimming Driver (0-10V) L17.0-ZE530 - (48) LED Array @530mA Line Voltage 4-Wire	120V 277V (50 / 60Hz)	ZE - 0-10V Dimming
ORDER INFO			
SHRS12 Example ^	L13.5-ZE420	120V	Not Applicable

Aesthetics & Options

TRIM	FINISH	COLOR TEMP	OPTIONS
Not Applicable	GVN - Gold Vein MOC - Mocha NLN - Natural Linen TNV - Textured Nickel Vinyl WLN - White Linen	30K - 3000K Color Temp 35K - 3500K Color Temp 40K - 4000K Color Temp 50K - 5000K Color Temp	F - Fused STC12-WH - 12" Stem and Canopy Kit STC24-WH - 24" Stem and Canopy Kit STC36-WH - 36" Stem and Canopy Kit STC48-WH - 48" Stem and Canopy Kit TP - Tamper-Proof Screw Set
ORDER INFO			
Not Applicable Example ^	GVN	30K	F

PROD	SOURCE	30K SPECS	30K SPECS	30K SPECS
SHRS12	L13.5	<ul style="list-style-type: none"> • TNV / NLN / GVN • 80 CRI Typ. • 30K - 3000K Color Temp • 2100 LED Source Lumens • 155 LED Source Lumens Per Watt 	<ul style="list-style-type: none"> • MOC Fabric • 80 CRI Typ. • 30K - 3000K Color Temp • 2100 LED Source Lumens • 155 LED Source Lumens Per Watt • 763 Delivered LED Lumens • 51 Delivered LED Lumens Per Watt 	<ul style="list-style-type: none"> • WMS Fabric • 80 CRI Typ. • 30K - 3000K Color Temp • 2100 LED Source Lumens • 155 LED Source Lumens Per Watt • 1479 Delivered LED Lumens • 98.8 Delivered LED Lumens Per Watt

REPLACEMENT PART	PART NO	NOTES
12 1/4" Textured Nickel Vinyl	3070892	Don't see the configuration you are looking for? Call us today at (513) 858-6004
12 1/4" Gold Vein	3070886	
12 1/4" Mocha	3070887	
12 1/4" Natural Linen	3070891	
12 1/4" White Linen	3070889	



TERONLIGHTING.COM
33 DONALD DR, FAIRFIELD, OH 45014
P: 513.858.6004 F: 513.858.6038
E: SALES@TERONLIGHT.COM



We reserve the right to revise the design components of any product due to parts availability or change in UL standards, without assuming any obligation or liability to modify any products previously manufactured, and without notice.

SILHOUETTE RD SM LED

Architectural Indoor



Fixture Core

PROJECT:	
TYPE:	
PO#:	QTY:
COMMENTS:	

PRODUCT CODE	SOURCE/WATTAGE	VOLTAGE	DIMMING DRIVER
SHRS12 - Silhouette RD SM	L20.5-ZE640 - (48) LED Array @640mA Line Voltage 4-Wire Dimming Driver (Dimmable 0 - 10V)	120V 277V (50 / 60Hz)	ZE - 0-10V Dimming
ORDER INFO			
SHRS12 Example ^	L13.5-ZE420	120V	Not Applicable

Aesthetics & Options

TRIM	FINISH	COLOR TEMP	OPTIONS
Not Applicable	GVN - Gold Vein MOC - Mocha NLN - Natural Linen TNV - Textured Nickel Vinyl WLN - White Linen	30K - 3000K Color Temp 35K - 3500K Color Temp 40K - 4000K Color Temp 50K - 5000K Color Temp	F - Fused STC12-WH - 12" Stem and Canopy Kit STC24-WH - 24" Stem and Canopy Kit STC36-WH - 36" Stem and Canopy Kit STC48-WH - 48" Stem and Canopy Kit TP - Tamper-Proof Screw Set
ORDER INFO			
Not Applicable Example ^	GVN	30K	F

PROD	SOURCE	30K SPECS	30K SPECS	30K SPECS
SHRS12	L17.0	<ul style="list-style-type: none"> TNV / NLN / GVN 80 CRI Typ. 30K - 3000K Color Temp 2650 LED Source Lumens 157 LED Source Lumens Per Watt 	<ul style="list-style-type: none"> MOC Fabric 80 CRI Typ. 30K - 3000K Color Temp 2650 LED Source Lumens 157 LED Source Lumens Per Watt 1207 Delivered LED Lumens 64.7 Delivered LED Lumens Per Watt 	<ul style="list-style-type: none"> WMS Fabric 80 CRI Typ. 30K - 3000K Color Temp 2650 LED Source Lumens 157 LED Source Lumens Per Watt 1939 Delivered LED Lumens 103.9 Delivered LED Lumens Per Watt
	L20.5	<ul style="list-style-type: none"> 80 CRI Typ. 30K - 3000K Color Temp 3100 LED Source Lumens 151 LED Source Lumens Per Watt 	<ul style="list-style-type: none"> 80 CRI Typ. 30K - 3000K Color Temp 3100 LED Source Lumens 151 LED Source Lumens Per Watt 1450 Delivered LED Lumens 60.1 Delivered LED Lumens Per Watt 	<ul style="list-style-type: none"> 80 CRI Typ. 30K - 3000K Color Temp 3100 LED Source Lumens 151 LED Source Lumens Per Watt 2331 Delivered LED Lumens 96.7 Delivered LED Lumens Per Watt

REPLACEMENT PART	PART NO	NOTES
12 1/4" Textured Nickel Vinyl	3070892	Don't see the configuration you are looking for? Call us today at (513) 858-6004
12 1/4" Gold Vein	3070886	
12 1/4" Mocha	3070887	
12 1/4" Natural Linen	3070891	
12 1/4" White Linen	3070889	



TERONLIGHTING.COM
33 DONALD DR, FAIRFIELD, OH 45014
P: 513.858.6004 F: 513.858.6038
E: SALES@TERONLIGHT.COM



We reserve the right to revise the design components of any product due to parts availability or change in UL standards, without assuming any obligation or liability to modify any products previously manufactured, and without notice.