

SILHOUETTE RD XL LED

Architectural Indoor



PROJECT:	
TYPE:	
PO#:	QTY:
COMMENTS:	


FEATURES

- [Stem and Canopy Kits Available](#)
- Fixture Has a Steel Mounting Pan w/ Hi-Reflectance White Powder Coat Finish
- Luminous White Acrylic Diffuser W/ Decorative Fabric Trim (Gold Vein, Mocha, Natural Linen, And White Linen)
- Textured Nickel Has a Luminous White Acrylic Diffuser w/ Solid Vinyl Material Providing Down Light Only
- Fixture Mounts Directly to 4" Junction Box (By Others)
- Dry Location
- Emergency Battery Available
- LED Light Fixture
- Mounting Hardware Included




LINE DRAWING

LINE DRAWING NOT TO SCALE

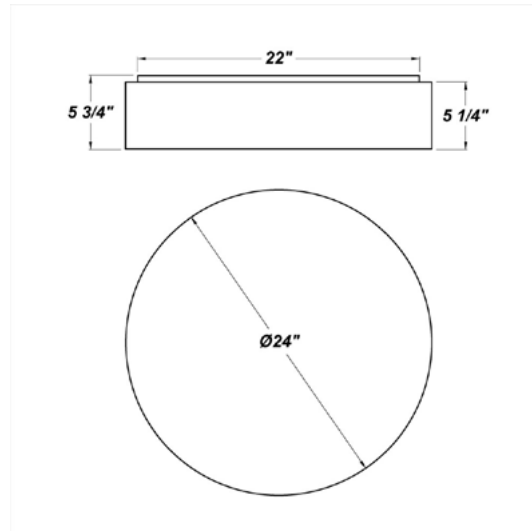

FINISHES


Textured Nickel Vinyl



Gold Vein



Mocha



Natural Linen



White Linen



For RAL Colors & Custom Match - Contact Teron Lighting Inc.

SILHOUETTE RD XL LED

Architectural Indoor



Fixture Core

PROJECT:	
TYPE:	
PO#:	QTY:
COMMENTS:	

PRODUCT CODE	SOURCE/WATTAGE	VOLTAGE	DIMMING DRIVER
SHRL24 - Silhouette RD XL	L21.0-ZE550 - (80) LED Array @ Line Voltage 4-Wire Dimming Driver (Dimmable 0 - 10V) L28.5-ZE750 - (80) LED Array @ Line Voltage 4-Wire Dimming Driver (Dimmable 0 - 10V)	120-277V (50 / 60Hz)	ZE - 0-10V Dimming
ORDER INFO			
SHRL24 Example ^	L21.0-ZE640	120-277V	ZE

Aesthetics & Options

TRIM	FINISH	COLOR TEMP	OPTIONS
Not Applicable	GVN - Gold Vein MOC - Mocha NLN - Natural Linen TNV - Textured Nickel Vinyl WLN - White Linen	30K - 3000K Color Temp 35K - 3500K Color Temp 40K - 4000K Color Temp 50K - 5000K Color Temp	ALP - Aluminum Mount Pan (For L37.5) BB - Back Box EBW/BB - Bodine BSL26 - Up to 5.1W Emergency Illumination With LEDs (Back Box Required) F - Fused SP - Surge Protector STC12-WH - 12" Stem and Canopy Kit STC24-WH - 24" Stem and Canopy Kit STC36-WH - 36" Stem and Canopy Kit STC48-WH - 48" Stem and Canopy Kit TP - Tamper-Proof Screw Set
ORDER INFO			
Not Applicable Example ^	GVN	30K	ALP

PROD	SOURCE	30K SPECS				
SHRL24	L20.5	<ul style="list-style-type: none"> 80 CRI Typ. 30K - 3000K Color Temp 3100 LED Source Lumens 151 LED Source Lumens Per Watt 				
	L30.0	<ul style="list-style-type: none"> 80 CRI Typ. 30K - 3000K Color Temp 4522 LED Source Lumens 134 LED Source Lumens Per Watt 				

REPLACEMENT PART	PART NO	NOTES
24" Textured Nickel Vinyl	3071192	Don't see the configuration you are looking for? Call us today at (513) 858-6004
24" Gold Vein	3071186	
24" Mocha	3071187	
24" Natural Linen	3071091	
24" White Linen	3071189	



TERONLIGHTING.COM
 33 DONALD DR, FAIRFIELD, OH 45014
 P: 513.858.6004 F: 513.858.6038
 E: SALES@TERONLIGHT.COM



We reserve the right to revise the design components of any product due to parts availability or change in UL standards, without assuming any obligation or liability to modify any products previously manufactured, and without notice.

SILHOUETTE RD XL LED

Architectural Indoor



Fixture Core

PROJECT:	
TYPE:	
PO#:	QTY:
COMMENTS:	

PRODUCT CODE	SOURCE/WATTAGE	VOLTAGE	DIMMING DRIVER
SHRL24 - Silhouette RD XL	L37.5-ZE1100 - (120) LED Array @ 1100mA Line Voltage 4-Wire Dimming Driver (Dimmable 0 - 10V) L50.0-ZE1750 - (4) 12.5W LED Boards@ 1750mA Line Voltage 4-Wire Dimming Driver (Dimmable 0 - 10V)	120V 277V (50 / 60Hz)	Not Applicable
ORDER INFO			
SHRL24 Example ^	L37.5-ZE1100	120V	Not Applicable

Aesthetics & Options

TRIM	FINISH	COLOR TEMP	OPTIONS
Not Applicable	GVN - Gold Vein MOC - Mocha NLN - Natural Linen TNV - Textured Nickel Vinyl WLN - White Linen	30K - 3000K Color Temp 35K - 3500K Color Temp 40K - 4000K Color Temp 50K - 5000K Color Temp	ALP - Aluminum Mount Pan (For L37.5) BB - Back Box EBW/BB - Bodine BSL26 - Up to 5.1W Emergency Illumination With LEDs (Back Box Required)* F - Fused SP - Surge Protector STC12-WH - 12" Stem and Canopy Kit STC24-WH - 24" Stem and Canopy Kit STC36-WH - 36" Stem and Canopy Kit STC48-WH - 48" Stem and Canopy Kit TP - Tamper-Proof Screw Set
ORDER INFO			
Not Applicable Example ^	GVN	30K	ALP

PROD	SOURCE	30K SPECS				
SHRL24	L37.5	<ul style="list-style-type: none"> 80 CRI Typ. 30K - 3000K Color Temp 4845 LED Source Lumens 129.2 LED Source Lumens Per Watt 				
	L50.0	<ul style="list-style-type: none"> 80 CRI Typ. 30K - 3000K Color Temp 8075 LED Source Lumens 161.5 LED Source Lumens Per Watt 				

REPLACEMENT PART	PART NO	NOTES
24" Textured Nickel Vinyl**	3057992	*For L30.0 & L37.5 Source Wattages Only
24" Gold Vein**	3057986	
24" Mocha**	3057987	
24" Natural Linen**	3057991	
24" White Linen**	3057989	
		Don't see the configuration you are looking for? Call us today at (513) 858-6004



TERONLIGHTING.COM
 33 DONALD DR, FAIRFIELD, OH 45014
 P: 513.858.6004 F: 513.858.6038
 E: SALES@TERONLIGHT.COM



We reserve the right to revise the design components of any product due to parts availability or change in UL standards, without assuming any obligation or liability to modify any products previously manufactured, and without notice.