TRITON ADA UL LED

Architectural Outdoor
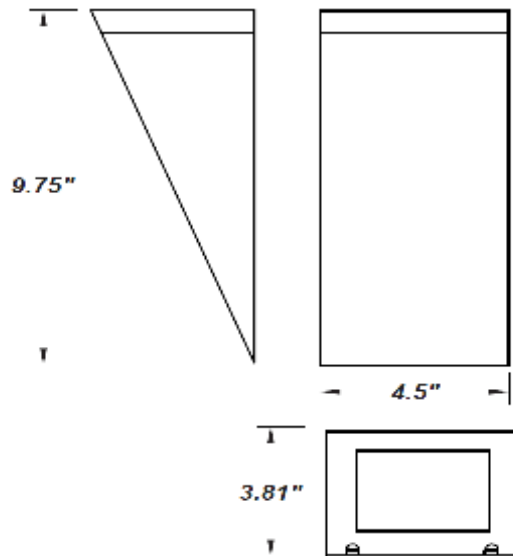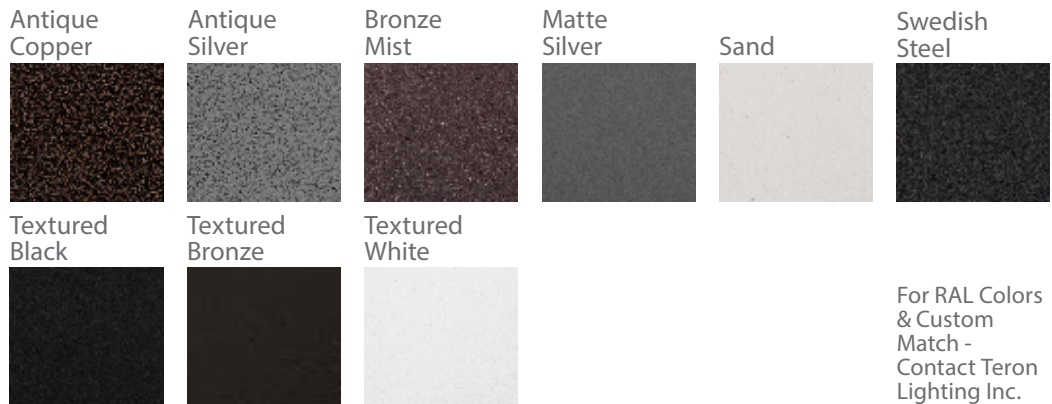
FEATURES

- ADA Compliant
- Aluminum Housing with Matte Silver Powder Coat Finish
- Aluminum Reflector
- Clear Glass Diffuser
- CSA Listed Damp and Wet Location For Wall Mounting
- Centered Over and Mounted to 4" J-Box (By Others)
- Dimmable <10% (120VAC Only) With Triac and ELV Dimmers
- LED Light Fixture
- Mounting Plate Mounts to Flat Surface
- Up Light Only

LINE DRAWING

LINE DRAWING NOT TO SCALE

9.75"

4.5"

3.81"

FINISHES

Antique Copper	Antique Silver	Bronze Mist	Matte Silver	Sand	Swedish Steel

Textured Black	Textured Bronze	Textured White	

For RAL Colors & Custom Match - Contact Teron Lighting Inc.

TRITON ADA UL LED

Architectural Outdoor

Fixture Core

PRODUCT CODE	SOURCE/WATTAGE	VOLTAGE	DIMMING DRIVER
TTN-ADA - Triton ADA LED	L12.0-ZT350 - 12.0W @ 350mA Dual Dim Driver:ELV, O-10V, Triac Dimming	120-277V (50 / 60Hz)	ZT - Dual Dim Which Contains: ELV Dimming, Triac Dimming, and 0-10V Dimming

ORDER INFO

TTN ADA	L12.0-ZT350	120-277V	ZT

Example ^ (may not represent a manufacturable product)

Aesthetics & Options

TRIM	FINISH	COLOR TEMP	OPTIONS
Not Applicable	AC - Antique Copper BZ - Textured Bronze AS - Antique Silver TW - Textured White BT - Bronze Mist SM - Matte Silver (Standard) SN - Sand SW - Swedish Steel TB - Textured Black	30K - 3000K Color Temp 35K - 3500K Color Temp 40K - 4000K Color Temp 50K - 5000K Color Temp	SPD – Surge Protection Device

ORDER INFO

Not Applicable	AC	30K	Not Applicable

Example ^ (may not represent a manufacturable product)

PROD	SOURCE	30K SPECS				
TTN-ADA	L12.0	• 30K - 3000K Color Temp • 1465 LED Source Lumens • 122 LED Source Lumens per Watt				

REPLACEMENT PART	PART NO	NOTES
Clear Glass Diffuser	3496262	

Don't see the configuration you are looking for?
Call us today at (513) 858-6004

BUY AMERICAN SINCE 1979