NIBLICK POLY BFP LED

Architectural Outdoor





PROJECT:	
TYPE:	
PO#:	
COMMENTS:	


QTY:

FEATURES

• Ambient Operating Temperature -40° C (-40° F) to 40° C (105° F)

- Black or White Polycarbonate Housing
- Constant Current at 700 Milliamps
- Estimated 50,000 Hours Life (L70)
- LED Light Fixture
- Luminous White Polycarbonate Jar Diffuser
- Mounting Hardware Included
- Mounts Directly to 4" Junction Box (By Others)
- Thermal Protected LED Array
- UL Listed Wet Location
- Wet Location

LINE DRAWING

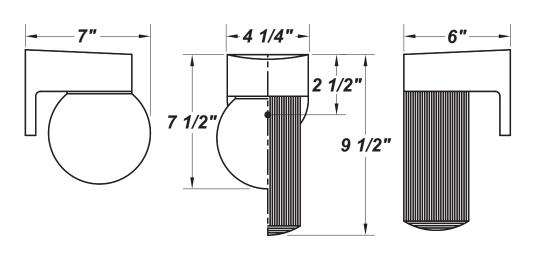

FINISHES

For RAL Colors & Custom Match -Contact Teron Lighting Inc.



TERONLIGHTING.COM 33 DONALD DR, FAIRFIELD, OH 45014 P: 513.858.6004 F: 513.858.6038 E: SALES@TERONLIGHT.COM



We reserve the right to revise the design components of any product due to parts availability or change in UL standards, without assuming any obligation or liability to modify any products previously manufactured, and without notice. 1



NIBLICK POLY BFP LED

Architectural Outdoor

- -

PROJECT:		
TYPE:		
PO#:	QTY:	
COMMENTS:		

Fixture Core PRODUCT CODE PNK - Niblick Poly BFP	SOURCE/WATTAGE L10.0 - (4) LED Array L13.0 - 13W (4) LED Array (120V Only)	VOLTAGE 120V-277V (50 / 60Hz) 120V (50 / 60Hz)	DIMMING DRIVER Not Applicable
ORDER INFO			

Aesthetics & Options

		FINISH	COLOR TEMP	OPTIONS
TRIM Not Applicable		BK - Black WH - White	40K - 4000K Color Temp	 PCL120 - Photocell (120V Only) JC - Clear Jar Polycarbonate Lens (Standard) JW - White Jar Polycarbonate Lens GC - Clear 6" Ribbed Polycarbonate Globe GW - White 6" Polycarbonate Globe
Not Applica Example ^		BK a manufacturable product)	40K	PCL120
PROD	SOURCE	40K SPECS		
PNK	L10.0 L13.0	 74 CRI Typ. 40K - 4000K Color Temp 912 LED Source Lumens 80 LED Source Lumans Per Watt 74 CRI Typ. 40K - 4000K Color Temp 1140 LED Source 		

REPLACEMENT PART	PART NO	NOTES
Clear Ribbed Jar Polycarbonate Diffuser White Ribbed Jar Polycarbonate Diffuser Clear 6" Ribbed Polycarbonate Globe Diffuser White 6" Polycarbonate Globe Diffuser	34024 3402460 34030 3402960	Don't see the configuration you are looking for? Call us today at (513) 858-6004



TERONLIGHTING.COM 33 DONALD DR, FAIRFIELD, OH 45014 P: 513.858.6004 F: 513.858.6038 E: SALES@TERONLIGHT.COM



We reserve the right to revise the design components of any product due to parts availability or change in UL standards, without assuming any obligation or liability to modify any products previously manufactured, and without notice.