

# POMMEROY LED

Architectural Indoor



PROJECT:	
TYPE:	
PO#:	QTY:
COMMENTS:	


## FEATURES

- Aluminum Trim Ring
- Aluminum Mounting Pan w/ Hi-Reflectance White Powder Coat Finish
- CSA Listed Damp Location for Ceiling Mount
- LED Light Fixture
- Luminous White Acrylic Lens
- Mounts Directly to 4" Junction Box (By Others)
- Mounting Hardware Included



## LINE DRAWING

LINE DRAWING NOT TO SCALE

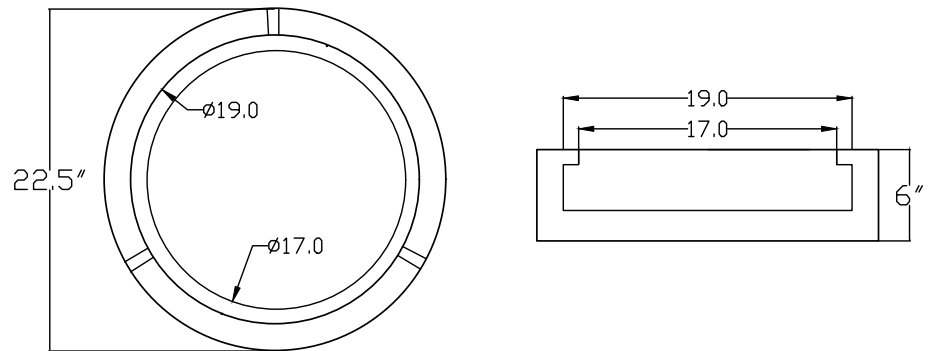

## FINISHES

Antique Copper	Antique Silver	Bronze Mist	Matte Silver	Sand	Swedish Steel
Textured Black	Textured Bronze	Textured White			

For RAL Colors & Custom Match - Contact Teron Lighting Inc.

# POMMERROY LED 17"

Architectural Indoor



Fixture Core

PROJECT:	
TYPE:	
PO#:	QTY:
COMMENTS:	

PRODUCT CODE	SOURCE/WATTAGE	VOLTAGE	DIMMING DRIVER
PMY - Pommeroy LED	L21.0-ZE550 - 21.0W @ 550mA 0-10V Dimming Driver L28.5-ZE750 - 28.0W @ 750mA 0-10V Dimming Driver	120 - 270V	ZE - 0-10V Dimming Driver
ORDER INFO			
PMY	L21.0-LT550	120 - 277V	ZE

Example ^ (may not represent a manufacturable product)

Aesthetics & Options

TRIM	FINISH	COLOR TEMP	OPTIONS
Not Applicable	AC - Antique Copper AS - Antique Silver BT - Bronze Mist SM - Matte Silver SN - Sand SW - Swedish Steel TB - Textured Black BZ - Textured Bronze TW - Textured White (Standard)	30K - 3000K Color Temp 35K - 3500K Color Temp 40K - 4000K Color Temp 50K - 5000K Color Temp	STC12-WH - 12" Stem & Canopy Kit* STC24-WH - 24" Stem & Canopy Kit* STC36-WH - 36" Stem & Canopy Kit* STC48-WH - 48" Stem & Canopy Kit*
ORDER INFO			
Not Applicable	AC	30K	Not Applicable

Example ^ (may not represent a manufacturable product)

PROD	SOURCE	30K SPECS				
	L21.0	80 CRI Typ. • 30K - 3000K Color Temp • 3100 LED Source Lumens • 151 LED Source Lumens Per Watt				
	L28.5	80 CRI Typ. • 30K - 3000K Color Temp • 4100 LED Source Lumens • 144 LED Source Lumens Per Watt				

REPLACEMENT PART	PART NO	NOTES
		*Stem & Canopy kits are white by default, if another color is needed consult factory Don't see the configuration you are looking for? Call us today at (513) 858-6004



TERONLIGHTING.COM  
33 DONALD DR, FAIRFIELD, OH 45014  
P: 513.858.6004 F: 513.858.6038  
E: SALES@TERONLIGHT.COM



We reserve the right to revise the design components of any product due to parts availability or change in UL standards, without assuming any obligation or liability to modify any products previously manufactured, and without notice.