

**INSTALLATION & MAINTENANCE INSTRUCTIONS
FOR THE
NEW VICEROY LED
ARCHITECTURAL VANITY**


WARNING: DISCONNECT POWER PRIOR TO INSTALLATION OR SERVICING OF FIXTURE

NOTE: THIS PRODUCT MUST BE INSTALLED IN ACCORDANCE WITH THE APPLICABLE LOCAL & NATIONAL ELECTRICAL CODES BY A PERSON FAMILIAR WITH THE CONSTRUCTION AND FAMILIAR WITH THE OPERATION OF THE PRODUCT AND HAZARDS INVOLVED.

INSTALLATION

1. TURN POWER OFF TO THE WORK AREA TO AVOID SERIOUS INJURY FROM ELECTRICAL SHOCK.
2. REMOVE ANY EXCESS PACKING FROM THE FIXTURE.
3. THIS FIXTURE IS DESIGNED TO BE MOUNTED TO EITHER A 2" JUNCTION BOX (SUPPLIED BY CUSTOMER), A 4" JUNCTION BOX (SUPPLIED BY CUSTOMER) WITH OPTIONAL JBC COVER.
4. REMOVE THE 8-32 SCREWS HOLDING THE LED ASSEMBLY TO THE WALL MOUNT.
5. INSTALL WALL MOUNT TO JUNCTION BOX USING SCREWS (NOT SUPPLIED). MAKE SURE THE CENTER 7/8" HOLE IS CENTERED OVER JUNCTION BOX AND LEVEL OR PLUMB. ADDITIONAL HOLES AT EITHER END ARE AVAILABLE TO SECURE TO SURFACE WITH 2 SUITABLE FASTENERS (SUPPLIED BY THE CUSTOMER).
6. COMPLETE THE WIRING TO THE POWER SOURCE AND GROUND. THE BLACK AS LINE; WHITE AS COMMON; BARE/GREEN AS GROUND. WIRE CONNECTIONS TO BE MADE INSIDE OF HOUSING.
7. REASSEMBLE THE LED ASSEMBLY TO THE WALL MOUNT USING THE 8-32 SCREWS.

NOTE: FASCIA/TRIMS ARE OPTIONAL BUT DO NOT AFFECT MOUNTING.

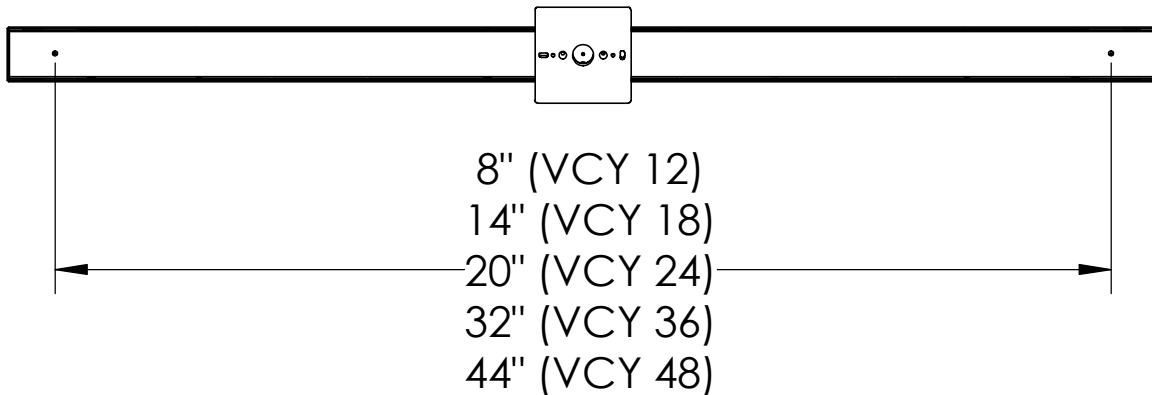

MAINTENANCE

**DO NOT USE CLEANSERS CONTAINING BLEACH.
THE METAL PORTION OF THE FIXTURE CAN BE
WIPED CLEAN AS NEEDED USING A MILD SOAP
SOLUTION.**



SIZE	PART NO.	REV.
A	100340	~
		SHEET 1 OF 1