


WARNING: DISCONNECT POWER PRIOR TO INSTALLATION OR SERVICING OF FIXTURE

NOTE: THIS PRODUCT MUST BE INSTALLED IN ACCORDANCE WITH THE APPLICABLE LOCAL & NATIONAL ELECTRICAL CODES BY A PERSON FAMILIAR WITH THE CONSTRUCTION AND FAMILIAR WITH THE OPERATION OF THE PRODUCT AND HAZARDS INVOLVED.

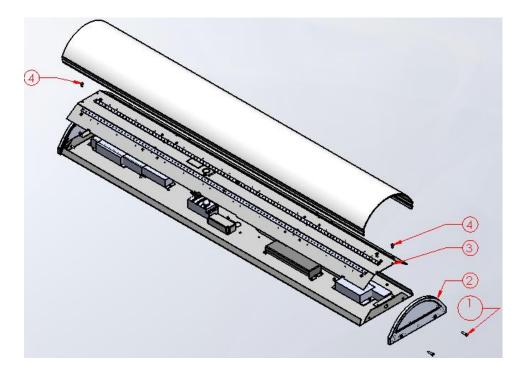

INSTALLATION

- 1. Remove any excess packing from the fixture.
- 2. This fixture is designed to be mounted over a junction box (supplied by customer), using 4 wall anchors.
- 3. Open the housing assembly by removing one of the end covers (2) in Figure 1 by removing the 2 screws (1) in Figure 1 remove lens and carefully set aside.
- 4. Take off LED mounting plate (3) in Figure 1 by removing 4 screws (4) in Figure 1 Located on the sides of the LED mounting plate.
- 6. Line up the back of the housing in desired location, completely covering junction box and mount securely to the wall with the wall anchors.
- 7. Complete the wiring to the power source and ground. The Black as Line; White as Common; Bare/Green as Ground. Wire connections to be made inside of housing.
- 8. Reassemble the housing by reattaching LED mounting plate and screws.
- 9. Replace lens and secure with end cap.

MAINTENANCE

DO NOT use cleansers containing bleach, or alcohol.

The metal portion of the fixture can be wiped clean as needed using a mild soap solution.

ATTENTION: Avoid moving any exposed wires. If any wires are accidentally disconnected, call a professional to repair.