

ALANTE PD BFP LED 15"

Architectural Indoor



PROJECT:		
TYPE:		
PO#:		QTY:
COMMENTS:		


FEATURES

- Bottom Shade: White Acrylic
- ETL/cETL Listed Dry Location
- Inner Shade: White Acrylic
- LED Light Fixture
- Mounts Directly to Surface w/ Two Wall Anchors (Not Included)
- Outer Shade: Off-White Decorative Fiber
- Steel Housing w/ Brushed Nickel Powder Coat Finish



LINE DRAWING

LINE DRAWING NOT TO SCALE

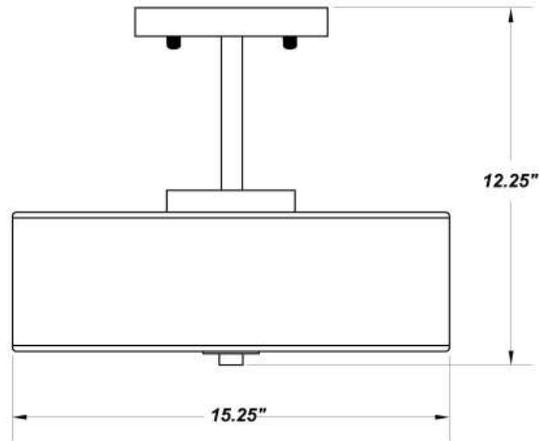

FINISHES

Brushed Nickel



ALANTE PD BFP LED 15"

Architectural Indoor



Fixture Core

PROJECT:	
TYPE:	
PO#:	QTY:
COMMENTS:	

PRODUCT CODE	TRIM	WATTAGE	DIMMING DRIVER
AE15PD - Alante Pendant 15" (With 6" Stem)	Not Applicable	L24.0- 24W	Not Applicable
ORDER INFO			

Aesthetics & Options

VOLTAGE	FINISH	COLOR TEMP	OPTIONS
UNV - 120V - 277V	BN - Brushed Nickel (Standard)	30K - 3000K Color Temp.	Not Applicable
ORDER INFO			

PROD	SOURCE	30K SPECS				
AE15PD	L24.0	<ul style="list-style-type: none"> 30K - 3000K Color Temp 1830 LED Delivered Lumens 76 LED Delivered Lumens Per Watt 80 CRI 				

REPLACEMENT PART	PART NO	NOTES
		L70 >35,000 hrs Minimum Starting Temperature = -20 Degrees C



TERONLIGHTING.COM
 33 DONALD DR, FAIRFIELD, OH 45014
 P: 513.858.6004 F: 513.858.6038
 E: SALES@TERONLIGHT.COM

REV 09042024

SEND CUT-SHEET

We reserve the right to revise the design components of any product due to parts availability or change in UL standards, without assuming any obligation or liability to modify any products previously manufactured, and without notice.