



As an industrial wall pack, Caddy serves as a robust lighting solution for various applications, from illuminating loading docks to providing security lighting at the back of buildings and enhancing visibility in industrial storage areas. Its sturdy construction ensures durability in demanding environments, while its design focuses on delivering dependable and efficient illumination where it's needed most. The Caddy is the go-to choice for spaces that require powerful and reliable lighting in industrial settings, ensuring safety and functionality are never compromised.

## LED Engine

**Color Temp (CCT):** 3000K, 3500K, 4000K  
**CRI:** 80+ (consult factory for 90+)  
**Life Expectancy:** L70 rated at 50,000+ hours  
**Binning:** 3-step Macadam  
**Output:** Min 2212 Delivered Lumens  
 Max 5441 Delivered Lumens


## Driver

**Type:** Constant current, Class 2, 120-277 Vac,  
 50/60Hz  
**Dimming:** 0-10V and Phase (Leading or Trailing Edge)  
**Efficiency:** Min 92%  
**Operating Temp:** -40°C / -40°F to 50°C / 122°F  
**FCC Noise:** Meets FCC Title 47 EMC Part 15 limits

## Certifications

**Location Listing:** CSA Approved Wet Location For Wall  
 Mounting (DL Only)  
**Other:** Dark Sky Compliant

## Dimensions

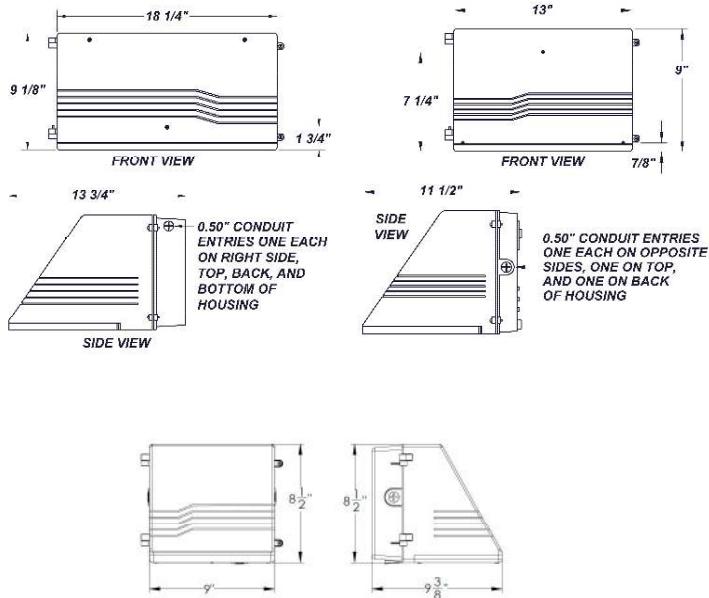

## Construction

**Housing:** Die-cast aluminum housing, fully gasketed, tempered clear glass lens. **Finish:** high quality polyester powder coating, various finishes. **Hardware:** Stainless steel. **Mounting:** Wall-mounted over a 4-inch junction box.

## Catalog String


Fixture Core	CD	1	--	2	3	4	UNV	5
Aesthetics & Options		6	7	8				

## Product Specifications

1 — Product Code	2 — Trim	3 — Wattage	4 — Dimming	5 — Voltage
CDL (large)	Not Applicable	L35.0 (CDT/ZE only)	ZE - 0-10V	UNV - (120V-277V)
CDT (medium)		L48.0 (CDL/ZE only)	LT - Leading/Trailing Edge	
CDSQ (square)		L12.0 (CDSQ/LT only)		
		L20.0 (CDSQ/LT only)		
		L26.0 (CDSQ/ZE only)		
6 — Finish	7 — CCT	8 — Options		
BZ- Bronze (Additional Finishes Quoted)	30K - 3000K 35K - 3500K 40K - 4000K	EB - Integral EM Battery EBC - Cold Weather (-20C) EM Battery (CDT/CDL only) EBCA - Title 20 Compliant Integral EM Battery F - Fused FAL - Frosted Acrylic Lens (CDT only)	MSE - External Motion Sensor PCL - Photocell (specify voltage, not with CDSQ w/EB) SPD - Surge Protection Device SPL - Semi Frosted Polycarbonate Lens (CDSQ only) TP - Tamper-Proof Screw Set	

## Performance

Wattage	Delivered Lumens	Efficacy LM/W	CCT	Size
L35.0	2661	66	4000K	CDT
L48.0	5441	94	3000K	CDL
L26.0	2212	101	3000K	CDSQ



### Polar Graph Details:

**IES File Name:** CADDY MD LED 35W CGL 40K.IES

Maximum Candela = 995.26 Located At Horizontal Angle = 0, Vertical Angle = 5

# 1 - Vertical Plane Through Horizontal Angles (0 - 180) (Through Max. Cd.)

# 2 - Horizontal Cone Through Vertical Angle (5) (Through Max. Cd.)

BUG Rating: B1-U0-G0