

Exemplifying both form and function, Capri is designed to shine as a vanity light in multifamily and hospitality settings. Its sleek and contemporary design not only enhances the aesthetics of these spaces but also provides precise and efficient illumination. Capri's illumination is tailored to enhance every detail, making it an ideal choice for spaces that value both style and practicality. Whether in multifamily residences or hospitality venues, Capri adds a touch of modern elegance while ensuring that every reflection is cast in the best possible light.

LED Engine

Color Temp (CCT): 3000K, 3500K, 4000K
CRI: 80+ (consult factory for 90+)
Life Expectancy: L70 rated at 50,000+ hours
Binning: 3-step Macadam
Output: Min 1984 Source Lumens
 Max 10437 Source Lumens


Driver

Type: Constant current, Class 2, 120-277 Vac, 50/60Hz
Dimming: 0-10V and phase (leading or trailing edge)
Efficiency: Min 92%
Operating Temp: -40°C / -40°F to 50°C / 122°F
FCC Noise: Meets FCC Title 47 EMC Part 15 limits

Certifications

Location Listing: Damp Location Rated for Wall or Ceiling Mounting
Other: ADA Compliant
 Buy American Compliant

Dimensions

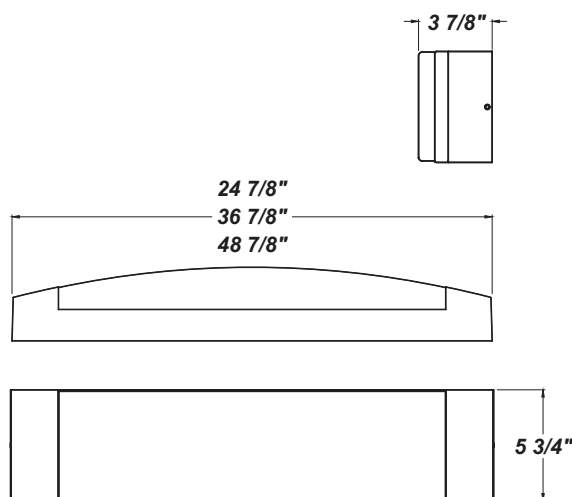

Construction

Back box: Formed Steel. **Trim:** Formed Aluminum with white acrylic diffuser. **Finish:** high quality polyester powder coating, various finishes. **Mounting:** wall- or ceiling-mounted above a 4-inch junction box.

Catalog String


Fixture Core	CPR		--			UNIV
		1	2	3	4	5
Aesthetics & Options						
		6	7			8

Product Specifications

1 — Product Code	2 — Trim	3 — Wattage	4 — Dimming	5 — Voltage
24 - CPR24 36 - CPR36 48 - CPR48	Not Applicable	L22.0 (24/LT only) L33.0 (24 only) L36.0 (24/ZE only) L35.0 (36/ZE only) L72.0 (48/ZE only)	ZE - 0-10V LT - Leading Trail Edge	UNIV - (120V-277V)
6 — Finish	7 — CCT	8 — Options		
FBK - Fine Textured Black FBZ - Fine Textured Bronze FWH - Fine Textured White FSV - Fine Textured Silver	30K - 3000K 35K - 3500K 40K - 4000K	F - Fused TP - Tamper-Proof Screw Set		

Performance

Wattage	Source Lumens	Efficacy LM/W	CCT	Size
L22.0	3479	145	3000K	24
L33.0	1984	51		24
L36.0	2566	61		24
L35.0	5073	145		36
L72.0	10437	145		36

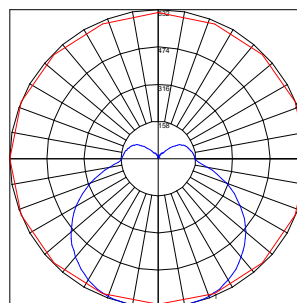

Polar Graph Details:

IES File Name: CPR24-L36.0-ZE1100-SM-30K.IES

Maximum Candela = 632.158 Located At Horizontal Angle = 0, Vertical Angle = 10

1 - Vertical Plane Through Horizontal Angles (0 - 180) (Through Max. Cd.)

2 - Horizontal Cone Through Vertical Angle (10) (Through Max. Cd.)