

Concerto Wet

Architectural Outdoor



As an outdoor wall sconce, Concerto Wet merges rugged durability with a sleek aesthetic, making it a prime choice for commercial building applications. Designed to withstand the elements, it ensures reliability in the harshest of outdoor conditions while adding a touch of contemporary elegance to exteriors. Its robust construction doesn't compromise its style, making it an ideal lighting solution for those who demand both resilience and aesthetics in commercial settings. The Concerto Wet proves that outdoor lighting can be as tough as it is chic.

LED Engine

Color Temp (CCT): 3000K, 3500K, 4000K
CRI: 80+ (consult factory for 90+)
Life Expectancy: L70 rated at 50,000+ hours
Binning: 3-step Macadam
Output: 1260 Source Lumens


Driver

Type: Constant current, Class 2, 120-277 Vac, 50/60Hz
Dimming: 0-10V
Efficiency: Min 92%
Operating Temp: -40°C / -40°F to 50°C / 122°F
FCC Noise: Meets FCC Title 47 EMC Part 15 limits

Certifications

Location Listing: Wet Location Rated for Wall Mounting
Other: ADA Compliant
Buy America Compliant

Dimensions

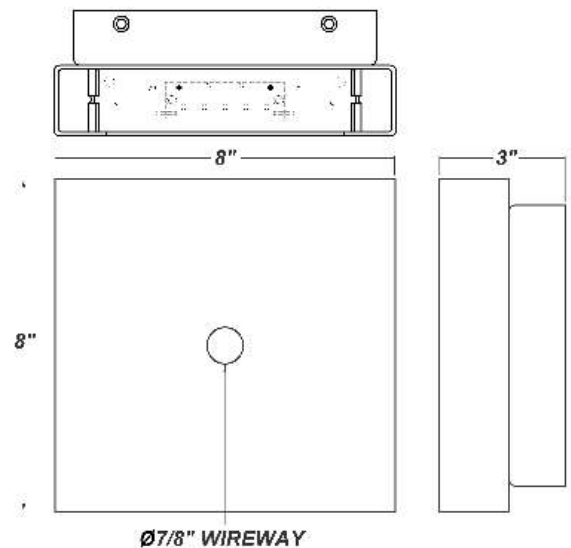

Construction

Housing: formed aluminum. **Finish:** high quality polyester powder coating, various finishes. **Hardware:** stainless steel. **Mounting:** wall-mounted over 4-inch junction box.

Concerto Wet

Architectural Outdoor



Catalog String

Fixture Core

CTO-W

UDL

3

4

UNIV

1

2

5

Aesthetics & Options

6

7


8

Product Specifications

1 — Product Code	2 — Trim	3 — Wattage	4 — Dimming	5 — Voltage
CTO-W	UDL - Up/Down	L21.6	ZE - 0-10V	UNIV - (120V-277V)
6 — Finish	7 — CCT	8 — Options		
FBK - Fine Textured Black FBZ - Fine Textured Bronze FWH - Fine Textured White FSV - Fine Textured Silver	30K - 3000K 35K - 3500K 40K - 4000K	SPD - Surge Protection Device		

Performance

Wattage	Source Lumens	Efficacy LM/W	CCT
L21.6	1260	116.6	3000K



Polar Graph Details:

IES File Name: CTO-W-UDL-L21.6-TW-30K.IES

Maximum Candela = 399.734 Located At Horizontal Angle = 45, Vertical Angle = 87

1 - Vertical Plane Through Horizontal Angles (45 - 225) (Through Max. Cd.)

2 - Horizontal Cone Through Vertical Angle (87) (Through Max. Cd.)

Bug Rating: B0-U4-G0