

Duval

Architectural Outdoor



Imbued with the timeless allure of craftsman-style design, the Duval stands as a robust outdoor decorative wall light, ready to grace and illuminate any facade. Built with durability at its core, it is particularly suited for multifamily settings, seamlessly blending with architectural nuances and enhancing curb appeal. Beyond multifamily, Duval's versatile charm and robustness also make it a fitting choice for commercial buildings, ensuring exteriors are not only well-lit but also exude an aura of sophistication and timeless beauty. Duval isn't just a light, it's an architectural statement.

LED Engine

- Color Temp (CCT):** 3000K, 3500K, 4000K
- CRI:** 80+ (consult factory for 90+)
- Life Expectancy:** L70 rated at 50,000+ hours
- Binning:** 3-step Macadam
- Output:** Min 899 Lumens
Max 1826 Lumens


Driver

- Type:** Constant current, Class 2, 120-277 Vac, 50/60Hz
- Dimming:** 0-10V and phase (trailing edge)
- Efficiency:** Min 92%
- Operating Temp:** -40°C / -40°F to 50°C / 122°F
- FCC Noise:** Meets FCC Title 47 EMC Part 15 limits

Certifications

- Location Listing:** Wet Location Rated for Wall Mounting
- Other:** Buy America Compliant

Dimensions

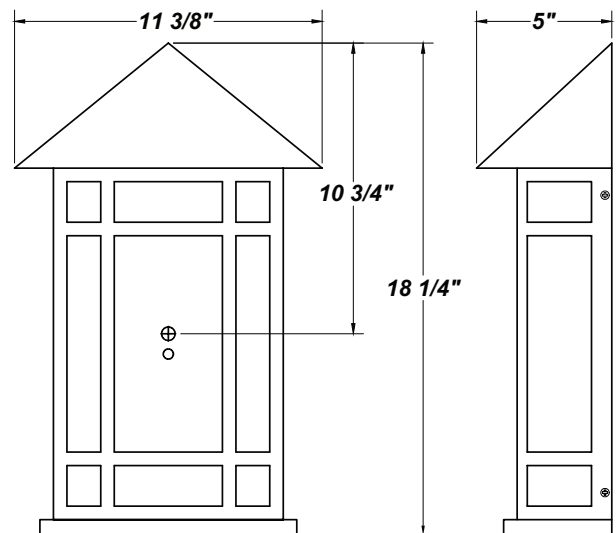

Construction

Housing: formed aluminum with luminous White Acrylic Panels. **Finish:** high quality polyester powder coating, various finishes.
Mounting: wall-mounted over a 4-inch junction box.



Catalog String


Fixture Core	DV 1	2	3	4	UNIV 5
Aesthetics & Options	6	7	8		

Product Specifications

1 — Product Code	2 — Trim	3 — Wattage	4 — Dimming	5 — Voltage
DV	Not Applicable	L18.0 (TE only) L37.0 (ZE only)	ZE - 0-10V TE - Trailing Edge	UNIV - (120V-277V)
6 — Finish	7 — CCT	8 — Options		
FBK - Fine Textured Black FBZ - Fine Textured Bronze FWH - Fine Textured White FSV - Fine Textured Silver	30K - 3000K 35K - 3500K 40K - 4000K	F - Fused TP - Tamper Resistant Screws SPD - Surge Protection Device		

Performance

Wattage	Delivered Lumens	Efficacy LM/W	CCT
L18.0	899	45	3000K
L37.0	1826	43	



Polar Graph Details:

IES File Name: DUVAL LED L37.0-WAL-30K.IES

Maximum Candela = 455 Located At Horizontal Angle = 0, Vertical Angle = 85

1 - Vertical Plane Through Horizontal Angles (0 - 180) (Through Max. Cd.)

2 - Horizontal Cone Through Vertical Angle (85) (Through Max. Cd.)

BUG Rating: B0-U4-G2