



Eagle offers versatile lighting solutions that adapt to diverse settings and preferences. As a ceiling-mounted indoor functional light, it delivers consistent and effective illumination, ensuring spaces are well-lit and inviting. For those seeking a touch of elegance, Eagle's decorative perforated trim can be added, effortlessly transforming it to resonate upscale aesthetics. Whether you're in the hospitality sector or the multifamily industry, Eagle stands as a testimony to broad usage and adaptability. It promises not just light, but a harmonious blend of functionality and style, suited for any environment.

LED Engine

- Color Temp (CCT):** 3000K, 3500K, 4000K
- CRI:** 80+ (consult factory for 90+)
- Life Expectancy:** L70 rated at 50,000+ hours
- Binning:** 3-step Macadam
- Output:** Min 1072 Delivered Lumens
Max 3847 Delivered Lumens


Driver

- Type:** Constant current, Class 2, 120-277 Vac, 50/60Hz
- Dimming:** 0-10V
- Efficiency:** Min 92%
- Operating Temp:** -40°C / -40°F to 50°C / 122°F
- FCC Noise:** Meets FCC Title 47 EMC Part 15 limits

Certifications

- Location Listing:** Damp Location for Wall or Ceiling Mounting
- Other:** ADA Compliant
Energy Star Compliant

Dimensions

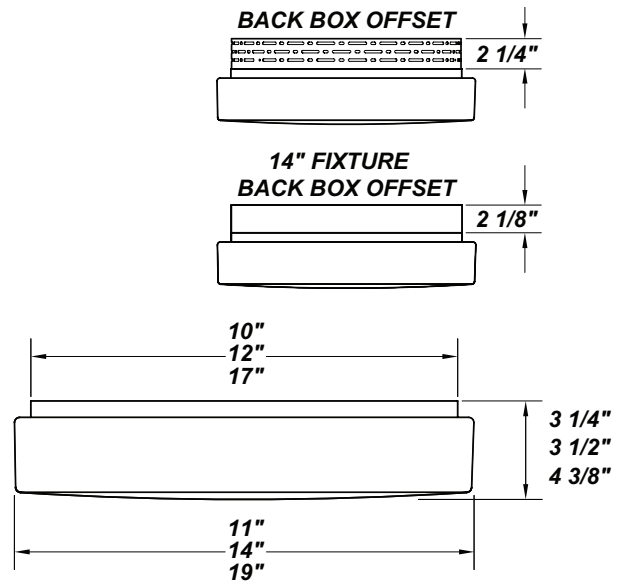

Construction

Mounting Pan: stamped steel. **Diffuser:** white acrylic with optional perforated steel. **Finish:** high quality polyester powder coating, various finishes. **Mounting:** wall-mounted over a 4inch junction box.

Catalog String

Fixture Core

EE

1

2

3

4

UNIV

5

Aesthetics & Options

6

7


8

Product Specifications

1 — Product Code	2 — Trim	3 — Wattage	4 — Dimming	5 — Voltage
11 - EE11 14 - EE14 19 - EE19	STD (blank) PRF	L13.5 (11 & 14 only) L17.0 (11 & 14 only) L20.5 (11 & 14 only) L28.5 (19 only) L37.5 (19 only)	ZE - 0-10V	UNIV - (120V-277V)
6 — Finish	7 — CCT	8 — Options		
FBK - Fine Textured Black FBZ - Fine Textured Bronze FWH - Fine Textured White FSV - Fine Textured Silver	30K - 3000K 35K - 3500K 40K - 4000K	F - Fused MSI - Integral Motion Sensor SPD - Surge Protection Device TP - Tamper-Proof Screw Set WLL - High Lumen Lens	WPL - White Polycarbonate Lens EB/BB - Back Box Integral EM Battery (not in 11) STC12-WH - 12" Stem and Canopy Kit STC24-WH - 24" Stem and Canopy Kit STC36-WH - 36" Stem and Canopy Kit	

Performance

Wattage	Delivered Lumens	Efficacy LM/W	CCT	Size
L13.5	1072	71	3000K	11, 14
L17.0	1364	72		11, 14
L20.5	2478	109		11, 14
L37.5	3847	92		19



Polar Graph Details:

IES File Name: EE-L13.0 ZE560-WLL-3000K.IES

Maximum Candela = 439 Located At Horizontal Angle = 0, Vertical Angle = 0

1 - Vertical Plane Through Horizontal Angles (0 - 180) (Through Max. Cd.)

2 - Horizontal Cone Through Vertical Angle (0) (Through Max. Cd.)