



Eagle offers versatile lighting solutions that adapt to diverse settings and preferences. As a ceiling-mounted indoor functional light, it delivers consistent and effective illumination, ensuring spaces are well-lit and inviting. For those seeking a touch of elegance, Eagle's decorative perforated trim can be added, effortlessly transforming it to resonate upscale aesthetics. Whether you're in the hospitality sector or the multifamily industry, Eagle stands as a testimony to broad usage and adaptability. It promises not just light, but a harmonious blend of functionality and style, suited for any environment.

## LED Engine

**Color Temp (CCT):** 3000K, 3500K, 4000K  
**CRI:** 80+ (consult factory for 90+)  
**Life Expectancy:** L70 rated at 50,000+ hours  
**Binning:** 3-step Macadam  
**Output:** Min 1072 Delivered Lumens  
 Max 3847 Delivered Lumens


## Driver

**Type:** Constant current, Class 2, 120-277 Vac, 50/60Hz  
**Dimming:** 0-10V  
**Efficiency:** Min 92%  
**Operating Temp:** -40°C / -40°F to 50°C / 122°F  
**FCC Noise:** Meets FCC Title 47 EMC Part 15 limits

## Certifications

**Location Listing:** Damp Location for Wall or Ceiling Mounting  
**Other:** ADA Compliant  
 Energy Star Compliant

## Dimensions

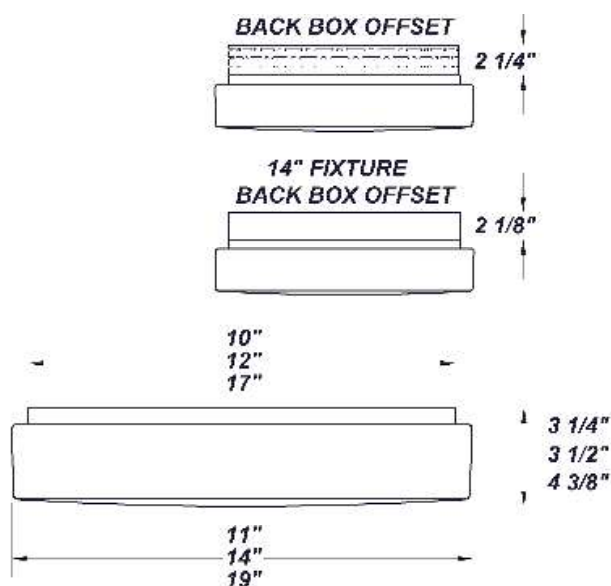

## Construction

**Mounting Pan:** stamped steel. **Diffuser:** white acrylic with optional perforated steel. **Finish:** high quality polyester powder coating, various finishes. **Mounting:** wall-mounted over a 4inch junction box.

## Catalog String

Fixture Core

EE

1

2

3

4

UNIV

5

Aesthetics & Options

6

7

8


## Product Specifications

1 — Product Code	2 — Trim	3 — Wattage	4 — Dimming	5 — Voltage
EE11 - 11"	STD (blank)	L13.5 (11 & 14 only)	ZE - 0-10V	UNIV - (120V-277V)
EE14 - 14"	PRF	L17.0 (11 & 14 only)		
EE19 - 19"		L20.5 (11 & 14 only)		
		L28.5 (19 only)		
		L37.5 (19 only)		

6 — Finish	7 — CCT	8 — Options
WHT - Gloss White (Std)	30K - 3000K	F - Fused
FBK - Fine Textured Black	35K - 3500K	MSI - Integral Motion Sensor
FBZ - Fine Textured Bronze	40K - 4000K	SPD - Surge Protection Device
FWH - Fine Textured White		TP - Tamper-Proof Screw Set
FSV - Fine Textured Silver		WLL - High Lumen Lens
		WPL - White Polycarbonate Lens
		EB/BB - Back Box Integral EM Battery (not in 11)
		STC12-WH - 12" Stem and Canopy Kit
		STC24-WH - 24" Stem and Canopy Kit
		STC36-WH - 36" Stem and Canopy Kit

## Performance

Wattage	Delivered Lumens	Efficacy LM/W	CCT	Size
L13.5	1072	71	3000K	11, 14
L17.0	1364	72		11, 14
L20.5	2478	109		11, 14
L37.5	3847	92		19



### Polar Graph Details:

**IES File Name:** EE-L13.0 ZE560-WLL-3000K.IES

Maximum Candela = 439 Located At Horizontal Angle = 0, Vertical Angle = 0

# 1 - Vertical Plane Through Horizontal Angles (0 - 180) (Through Max. Cd.)

# 2 - Horizontal Cone Through Vertical Angle (0) (Through Max. Cd.)