



Eagle offers versatile lighting solutions that adapt to diverse settings and preferences. As a ceiling-mounted indoor functional light, it delivers consistent and effective illumination, ensuring spaces are well-lit and inviting. For those seeking a touch of elegance, Eagle's decorative perforated trim can be added, effortlessly transforming it to resonate upscale aesthetics. Whether you're in the hospitality sector or the multifamily industry, Eagle stands as a testimony to broad usage and adaptability. It promises not just light, but a harmonious blend of functionality and style, suited for any environment.

LED Engine

Color Temp (CCT): 3000K, 3500K, 4000K
CRI: 80+ (consult factory for 90+)
Life Expectancy: L70 rated at 50,000+ hours
Binning: 3-step Macadam
Output: Min 1072 Delivered Lumens
 Max 3847 Delivered Lumens


Driver

Type: Constant current, Class 2, 120-277 Vac, 50/60Hz
Dimming: 0-10V
Efficiency: Min 92%
Operating Temp: -40°C / -40°F to 50°C / 122°F
FCC Noise: Meets FCC Title 47 EMC Part 15 limits

Certifications

Location Listing: Damp Location for Wall or Ceiling Mounting
Other: ADA Compliant
 Optional: Buy America Compliant

Dimensions

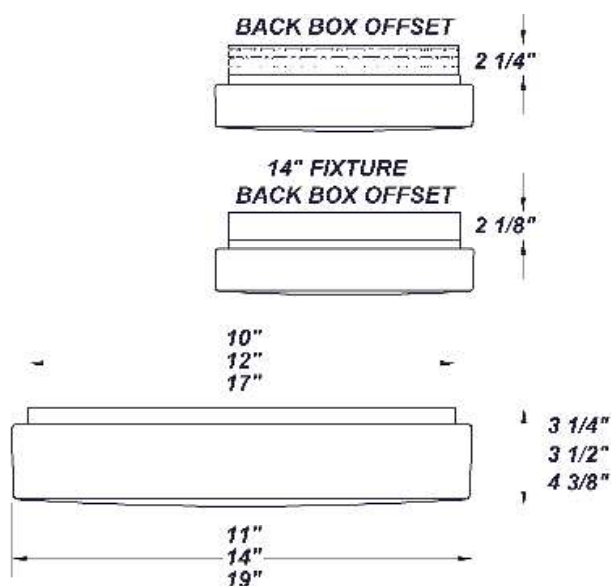

Construction

Mounting Pan: stamped steel. **Diffuser:** white acrylic with optional perforated steel. **Finish:** White high gloss quality polyester powder coating. **Mounting:** wall-mounted over a 4inch junction box.

Catalog String

Fixture Core

EE

1

2

3

4

UNV

5

Aesthetics & Options

6

7


8

Product Specifications

1 — Product Code	2 — Trim	3 — Wattage	4 — Dimming	5 — Voltage
EE11 - 11"	STD (<i>blank</i>)	L13.5	ZE - 0-10V	UNV - (120V-277V)
EE14 - 14"	PRF	L17.0		
EE19 - 19"		L20.5		
		L28.5 (<i>19 only</i>)		
		L37.5 (<i>19 only</i>)		
6 — Finish	7 — CCT	8 — Options		
WH - Gloss White	30K - 3000K	F - Fused	EB/BB - Back Box Integral EM Battery (<i>not in 11</i>)	
(Additional Finishes Quoted)	35K - 3500K	MSI - Integral Motion Sensor	STC12-WH - 12" Stem and Canopy Kit	
	40K - 4000K	SPD - Surge Protection Device	STC24-WH - 24" Stem and Canopy Kit	
		TP - Tamper-Proof Screw Set	STC36-WH - 36" Stem and Canopy Kit	
		WPL - White Polycarbonate Lens	BAA - Buy America Compliant	

Performance

Wattage	Delivered Lumens	Efficacy LM/W	CCT	Size
L13.5	1072	71	3000K	11, 14
L17.0	1364	72		11, 14
L20.5	2478	109		11, 14
L37.5	3847	92		19



Polar Graph Details:

IES File Name: EE-L13.0 ZE560-WLL-3000K.IES

Maximum Candela = 439 Located At Horizontal Angle = 0, Vertical Angle = 0

1 - Vertical Plane Through Horizontal Angles (0 - 180) (Through Max. Cd.)

2 - Horizontal Cone Through Vertical Angle (0) (Through Max. Cd.)