

Eclipse

Architectural Indoor



Epitomizing elegance and sophistication, the Eclipse serves as an indoor decorative wall sconce, casting a soft and inviting glow. Tailored specifically for the hospitality industry, it perfectly complements hotel interiors, elevating the ambiance to resonate luxury and comfort. Moreover, its refined aesthetics seamlessly fit into medical facilities, particularly doctors' offices, infusing a sense of calm and tranquility. Eclipse doesn't just light up a room; it transforms spaces, making them more welcoming and serene. A beacon of design excellence for discerning environments.

LED Engine

- Color Temp (CCT):** 3000K, 3500K, 4000K
- CRI:** 80+ (consult factory for 90+)
- Life Expectancy:** L70 rated at 50,000+ hours
- Binning:** 3-step Macadam
- Output:** Min 1195 Source Lumens
Max 2390 Source Lumens


Driver

- Type:** Constant current, Class 2, 120-277 Vac, 50/60Hz
- Dimming:** 0-10V and phase (leading or trailing edge)
- Efficiency:** Min 92%
- Operating Temp:** -40°C / -40°F to 50°C / 122°F
- FCC Noise:** Meets FCC Title 47 EMC Part 15 limits

Certifications

- Location Listing:** Damp Location Rated for Wall Mounting
- Other:** ADA Compliant
Buy America Compliant

Dimensions

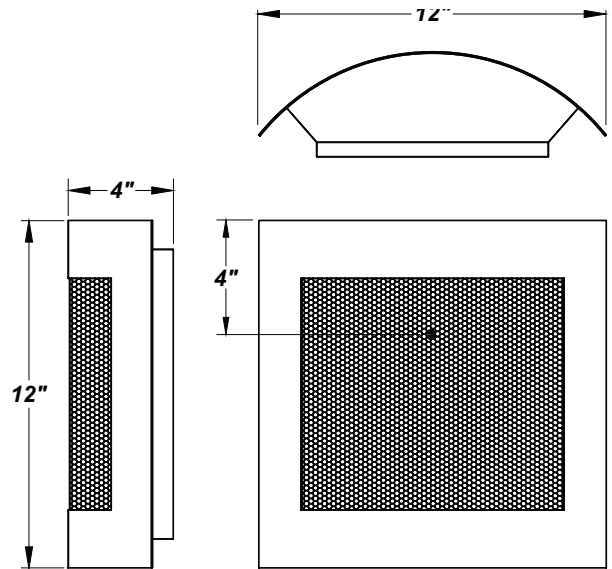

Construction

Mounting Pan: die-formed steel. **Trim:** custom-rolled steel with luminous white acrylic lens. **Finish:** high quality polyester powder coating, various finishes. **Mounting:** Wall-mounted over a 4-inch junction box



Catalog String


Fixture Core	ECLS 1	2	3	LT 4	UNIV 5
Aesthetics & Options	6	7	8		

Product Specifications

1 — Product Code	2 — Trim	3 — Wattage	4 — Dimming	5 — Voltage
ECLS	STD (Blank) RNG	L12.5 L25.0	LT - Leading/Trailing Edge	UNIV - (120V-277V)
6 — Finish	7 — CCT	8 — Options		
FBK - Fine Textured Black FBZ - Fine Textured Bronze FWH - Fine Textured White FSV - Fine Textured Silver	30K - 3000K 35K - 3500K 40K - 4000K	F - Fused WAL - White Acrylic Lens		

Performance

Wattage	Source Lumens	Efficacy LM/W	CCT
L12.5	1195	95.6	3000K
L25.0	2390	95.6	



Polar Graph Details:

IES File Name: ECLS-L12.5-PWL-SM-30K.IES

Maximum Candela = 249 Located At Horizontal Angle = 0, Vertical Angle = 155

1 - Vertical Plane Through Horizontal Angles (0 - 180) (Through Max. Cd.)

2 - Horizontal Cone Through Vertical Angle (155) (Through Max. Cd.)