

Faultless

Architectural Indoor



True to its name, Faultless delivers impeccable performance as an indoor ceiling light tailored for multifamily and hospitality settings. Its design leans towards serving practical and utilitarian purposes, making it an ideal choice for utility rooms and spaces where functionality takes precedence. Offering consistent and even illumination, Faultless stands as the go-to solution for areas demanding reliable and straightforward lighting without the frills. Efficient, dependable, and truly 'faultless' in its delivery.

LED Engine

Color Temp (CCT): 3000K, 3500K, 4000K
CRI: 80+ (consult factory for 90+)
Life Expectancy: L70 rated at 50,000+ hours
Binning: 3-step Macadam
Output: Min 979 Delivered Lumens
Max 2123 Delivered Lumens


Driver

Type: Constant current, Class 2, 120-277 Vac, 50/60Hz
Dimming: 0-10V
Efficiency: Min 92%
Operating Temp: -40°C / -40°F to 50°C / 122°F
FCC Noise: Meets FCC Title 47 EMC Part 15 limits

Certifications

Location Listing: Damp Location Rated for Ceiling Mounting
Other: ADA Compliant
Optional: Buy America Compliant

Dimensions

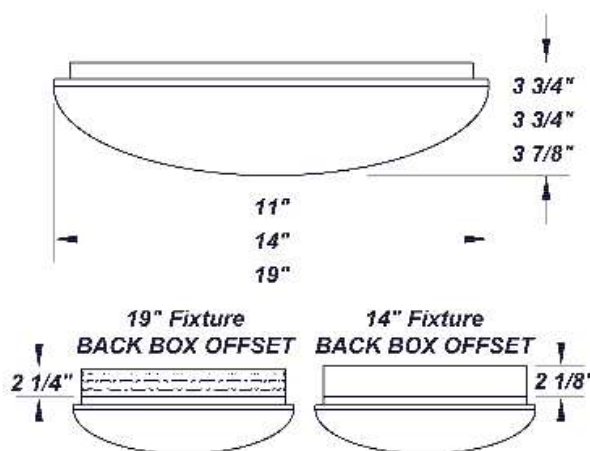

Construction

Mounting Pan: stamped steel. **Diffuser:** white acrylic. **Finish:** White high gloss quality polyester powder coating. **Mounting:** wall-mounted over a 4inch junction box.



Catalog String

Fixture Core

FS

1

2

3

ZE

4

UNV

5

Aesthetics & Options

6

7

8


Product Specifications

1 — Product Code	2 — Trim	3 — Wattage	4 — Dimming	5 — Voltage
FS11 - 11" FS14 - 14" FS19 - 19"	Not Applicable	L13.5 L17.0 L20.5 L28.5	ZE - 0-10V	UNV - (120V-277V)

6 — Finish	7 — CCT	8 — Options
WH - Gloss White (Additional Finishes Quoted)	30K - 3000K 35K - 3500K 40K - 4000K	BB - Back Box EB/BB - Back Box Integral EM Battery (Not available in 11") F - Fused SPD - Surge Protection Device TP - Tamper-Proof Screw Set STC12-WH - 12" Stem and Canopy Kit STC24-WH - 24" Stem and Canopy Kit STC36-WH - 36" Stem and Canopy Kit STC48-WH - 48" Stem and Canopy Kit WPL - White Polycarbonate Lens BAA - Buy American Compliant

Performance

Wattage	Delivered Lumens	Efficacy LM/W	CCT
L13.5	979	65.3	3000K
L17.0	1364	73.2	
L20.5	1643	68.2	
L28.5	2123	74.5	



Polar Graph Details:

IES File Name: FS-L13.0 ZE560-30K.
IES

Maximum Candela = 278 Located At
Horizontal Angle = 0, Vertical Angle = 0

1 - Vertical Plane Through Horizontal
Angles (0 - 180) (Through Max. Cd.)

2 - Horizontal Cone Through Vertical
Angle (0) (Through Max. Cd.)