



Designed for resilience, Heritage stands as a bastion of durability in the world of lighting. As an outdoor wall or ceiling bulkhead fixture, it thrives in challenging environments, particularly suited for industrial settings and high-use scenarios. Its robust construction makes it impact-resistant, ensuring it remains unfazed by the rigors of daily wear and tear. For locations demanding heavy-duty performance without compromising on aesthetics, Heritage is the epitome of strength, reliability, and steadfastness. Ideal for spaces where endurance meets elegance.

## LED Engine

**Color Temp (CCT):** 3000K, 3500K, 4000K  
**CRI:** 80+ (consult factory for 90+)  
**Life Expectancy:** L70 rated at 50,000+ hours  
**Binning:** 3-step Macadam  
**Output:** Min 1896 Source Lumens  
 Max 3100 Source Lumens


## Driver

**Type:** Constant current, Class 2, 120-277 Vac, 50/60Hz  
**Dimming:** 0-10V  
**Efficiency:** Min 92%  
**Operating Temp:** -40°C / -40°F to 50°C / 122°F  
**FCC Noise:** Meets FCC Title 47 EMC Part 15 limits

## Certifications

**Location Listing:** Wet Location for Wall and Ceiling Mounting  
**Other:** Buy America Compliant

## Dimensions

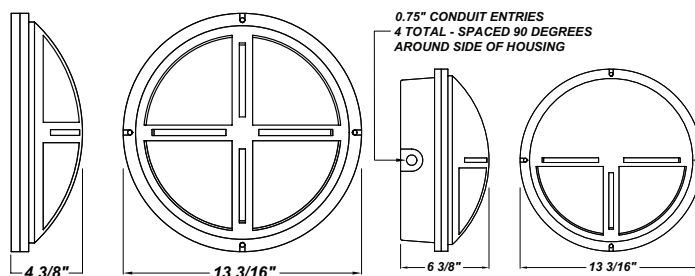

## Construction

**Housing:** die-cast marine grade aluminum. **Trim:** injection-molded polycarbonate frame, with injection molded white luminous lens. **Finish:** high quality polyester powder coating, various finishes. **Hardware:** Stainless steel. **Mounting:** wall-mount over 4-inch junction box.

## Catalog String

### Fixture Core

1

2

3

4

UNIV

5

### Aesthetics & Options

6

7

8

## Product Specifications

1 — Product Code	2 — Trim	3 — Wattage	4 — Dimming	5 — Voltage
<b>Round</b> - HRT <b>Shallow</b> - HRTS	<b>RNG</b> <b>CRS</b> <b>EYE</b>	<b>L20.0</b> - (Shallow only) <b>L18.4</b> - (Round only) <b>L20.5</b> - (Round only) <b>L24.5</b> - (Round only) <b>L30.0</b> - (Round only)	<b>ZE</b> - 0-10V	<b>UNIV</b> - (120V-277V)
6 — Finish	7 — CCT	8 — Options		
<b>BK</b> - Matte Black <b>BZ</b> - Matte Bronze <b>WH</b> - Matte White <b>TI</b> - Matte Titanium	<b>30K</b> - 3000K <b>35K</b> - 3500K <b>40K</b> - 4000K	<b>EB</b> - Integral EM Battery <b>F</b> - Fused <b>PCL</b> - Photocell (specify voltage) <b>SPD</b> - Surge Protection Device <b>TP</b> - Tamper Resistant Screws		

## Performance

Wattage	Source Lumens	Efficacy LM/W	CCT	Size
L20.0	3398	169.9	3000K	Shallow
L18.4	1896	103		Round
L20.5	3100	151		Round
L24.5	2528	103		Round
L30.0	4522	134		Round