

Designed for resilience, Heritage stands as a bastion of durability in the world of lighting. As an outdoor wall or ceiling bulkhead fixture, it thrives in challenging environments, particularly suited for industrial settings and high-use scenarios. Its robust construction makes it impact-resistant, ensuring it remains unfazed by the rigors of daily wear and tear. For locations demanding heavy-duty performance without compromising on aesthetics, Heritage is the epitome of strength, reliability, and steadfastness. Ideal for spaces where endurance meets elegance.

LED Engine

- Color Temp (CCT):** 3000K, 3500K, 4000K
- CRI:** 80+ (consult factory for 90+)
- Life Expectancy:** L70 rated at 50,000+ hours
- Binning:** 3-step Macadam
- Output:** Min 1896 Source Lumens
Max 3100 Source Lumens


Driver

- Type:** Constant current, Class 2, 120-277 Vac, 50/60Hz
- Dimming:** 0-10V
- Efficiency:** Min 92%
- Operating Temp:** -40°C / -40°F to 50°C / 122°F
- FCC Noise:** Meets FCC Title 47 EMC Part 15 limits

Certifications

- Location Listing:** Wet Location for Wall and Ceiling Mounting
- Other:** Buy America Compliant
ADA - HRTS Only

Dimensions

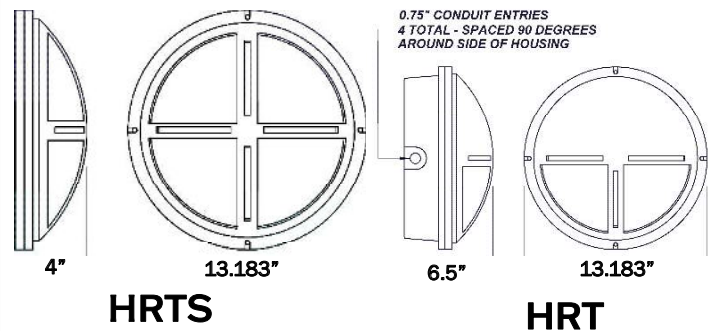

Construction

Housing: die-cast marine grade aluminum. **Trim:** injection-molded polycarbonate frame, with injection molded white luminous lens. **Finish:** high quality polyester powder coating, various finishes. **Hardware:** Stainless steel. **Mounting:** wall-mount over 4-inch junction box.

Catalog String

Fixture Core

<input type="text"/>	<input type="text"/>	<input type="text"/>	<input type="text"/>	<input type="text" value="UNIV"/>
1	2	3	4	5

Aesthetics & Options

<input type="text"/>	<input type="text"/>	<input type="text"/>
6	7	8

Product Specifications

1 — Product Code	2 — Trim	3 — Wattage	4 — Dimming	5 — Voltage
Round - HRT Shallow - HRTS	RNG CRS EYE	L20.0 - (Shallow only) L20.5 - (Round only) L24.5 - (Round only) L30.0 - (Round only)	ZE - 0-10V	UNIV - (120V-277V)

6 — Finish	7 — CCT	8 — Options
BK - Matte Black BZ - Matte Bronze WH - Matte White TI - Matte Titanium	30K - 3000K 35K - 3500K 40K - 4000K	EB - Integral EM Battery (HRT Only) F - Fused PCL - Photocell (<i>specify voltage</i>) (HRT Only) SPD - Surge Protection Device (HRT Only) TP - Tamper Resistant Screws

Performance

Wattage	Source Lumens	Efficacy LM/W	CCT	Size
L20.0	3280	160	3000K	Shallow
L20.5	3100	151		Round
L24.5	3969	162		Round
L30.0	4907	164		Round