

Huntington

Architectural Indoor



Epitomizing contemporary flair, Huntington is a masterfully crafted indoor wall sconce that resonates with modern sophistication. Its sleek lines and innovative design make it a standout choice for multifamily dwellings, adding an air of luxury to hospitality venues and introducing a touch of modernity to religious institutions. Its design ethos is centered on blending the best of contemporary aesthetics with unparalleled functionality. For spaces aiming to strike a balance between the avant-garde and timeless appeal, Huntington emerges as the embodiment of modern lighting excellence.

LED Engine

- Color Temp (CCT):** 3000K, 3500K, 4000K
- CRI:** 80+ (consult factory for 90+)
- Life Expectancy:** L70 rated at 50,000+ hours
- Binning:** 3-step Macadam
- Output:** Min 976 Delivered Lumens
Max 1896 Delivered Lumens


Driver

- Type:** Constant current, Class 2, 120-277 Vac, 50/60Hz
- Dimming:** Phase (Leading or Trailing edge)
- Efficiency:** Min 92%
- Operating Temp:** -40°C / -40°F to 50°C / 122°F
- FCC Noise:** Meets FCC Title 47 EMC Part 15 limits

Certifications

- Location Listing:** Damp Location Rated for Wall Mounting
- Other:** ADA Compliant
Buy America Compliant

Dimensions

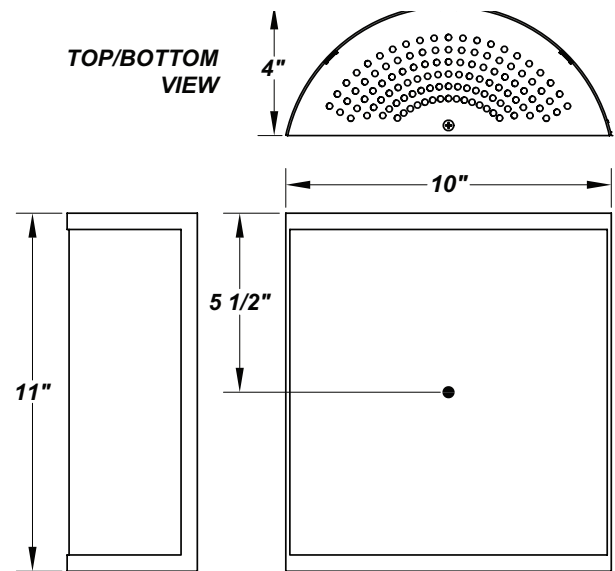

Construction

Mounting Pan: formed steel in high-reflectance white powder coat finish. **Trim:** formed steel with white luminous acrylic diffuser. **End Caps:** perforated steel. **Finish:** high quality polyester powder coating, various finishes. **Mounting:** wall-mounted over a 4-inch junction box.



Catalog String

Fixture Core

HT

1

2

3

4

UNIV

5

Aesthetics & Options

6

7


8

Product Specifications

1 — Product Code	2 — Trim	3 — Wattage	4 — Dimming	5 — Voltage
HT	Not Applicable	L12.5 L25.0	TE - Leading & Trailing Edge (120V only)	UNIV - (120V-277V)
6 — Finish	7 — CCT	8 — Options		
FBK - Fine Textured Black FBZ - Fine Textured Bronze FWH - Fine Textured White FSV - Fine Textured Silver	30K - 3000K 35K - 3500K 40K - 4000K	F - Fused PWL - White Acrylic w/ White Mylar Perf		

Performance

Wattage	Delivered Lumens	Efficacy LM/W	CCT
L12.5	976	78	3000K
L25.0	1896	75.8	



Polar Graph Details:

IES File Name: HT-L12.5-120-277V-TB-30K.IES

Maximum Candela = 244.12 Located At Horizontal Angle = 0, Vertical Angle = 89

1 - Vertical Plane Through Horizontal Angles (0 - 180) (Through Max. Cd.)

2 - Horizontal Cone Through Vertical Angle (89) (Through Max. Cd.)